

# WALKLINE

WALKLINE è un sistema di illuminazione a LED per esterni calpestabile e carrabile. E' composto da un profilo di alluminio anodizzato naturale e una superficie in resina opale per un'omogenea emissione della luce. Walkline viene proposto in differenti lunghezze. È dimmerabile 1-10V, DALI o DMX. Il fissaggio avviene tramite cassaforma a pavimento (inclusa)



0,50M | 4000K

LAMPING

|                                   |                                                                                                                         |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Source                            | LED strip                                                                                                               |
| Total power                       | 7,5W                                                                                                                    |
| Emission                          | diffused                                                                                                                |
| Switching                         | according to driver                                                                                                     |
| Tension                           | 24VDC                                                                                                                   |
| Color temperature                 | 4000K                                                                                                                   |
| Luminous flux                     | 325lm                                                                                                                   |
| Initial luminaire efficacy        | 43lm/W                                                                                                                  |
| Initial chromaticity              | SDCM < 3                                                                                                                |
| Typ CRI                           | 90                                                                                                                      |
| IP class                          | 67                                                                                                                      |
| Dimensions                        | 50,5x3x9,25cm                                                                                                           |
| Materials                         | anodized aluminum                                                                                                       |
| Ambient temperature range         | - 20°C / 35°C                                                                                                           |
| Performance ambient temperature   | 25°C                                                                                                                    |
| Mechanical impact protection code | IK10                                                                                                                    |
| Notes                             | driver not included, 1-10V, DALI, DMX, Casambi,<br>cable length 1m, certified 500kg static load,<br>3500kg dynamic load |
| Customization options             | CCT 2700K, body length                                                                                                  |
| Accessories                       | Drivers 24VDC + DALI interface,                                                                                         |
| Net lamp weight                   | 1,75 kg                                                                                                                 |


Codes

BWLK0205G26NAA

PACKAGE

Package 01

Certificazioni

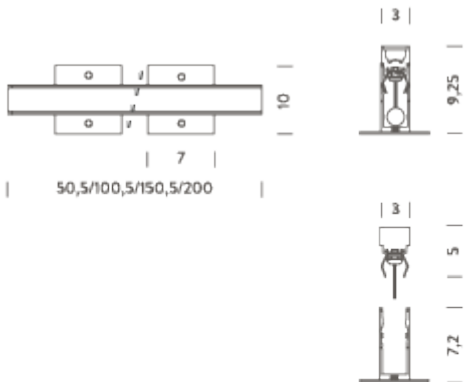

Structure

grey

Dimension: 52x3x9 cm / Gross weight: 1,75 kg

0,50M | 6000K

LAMPING

|                                   |                                                                                                                         |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Source                            | LED strip                                                                                                               |
| Total power                       | 7,5W                                                                                                                    |
| Emission                          | diffused                                                                                                                |
| Switching                         | according to driver                                                                                                     |
| Tension                           | 24VDC                                                                                                                   |
| Color temperature                 | 6000K                                                                                                                   |
| Luminous flux                     | 325lm                                                                                                                   |
| Initial luminaire efficacy        | 43lm/W                                                                                                                  |
| Initial chromaticity              | SDCM < 3                                                                                                                |
| Typ CRI                           | 90                                                                                                                      |
| IP class                          | 67                                                                                                                      |
| Dimensions                        | 50,5x3x9,25cm                                                                                                           |
| Materials                         | anodized aluminum                                                                                                       |
| Ambient temperature range         | - 20°C / 35°C                                                                                                           |
| Performance ambient temperature   | 25°C                                                                                                                    |
| Mechanical impact protection code | IK10                                                                                                                    |
| Notes                             | driver not included, 1-10V, DALI, DMX, Casambi,<br>cable length 1m, certified 500kg static load,<br>3500kg dynamic load |
| Customization options             | CCT 2700K, body length                                                                                                  |
| Accessories                       | Drivers 24VDC + DALI interface,                                                                                         |
| Net lamp weight                   | 1,75 kg                                                                                                                 |


Codes

BWLK0205G260AA

PACKAGE

Package 01

Certificazioni

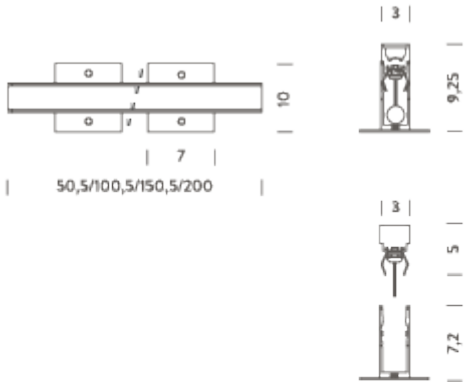

Structure

grey

Dimension: 52x3x9 cm / Gross weight: 1,75 kg

1M | 4000K

LAMPING

|                                   |                                                                                                                         |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Source                            | LED strip                                                                                                               |
| Total power                       | 15W                                                                                                                     |
| Emission                          | diffused                                                                                                                |
| Switching                         | according to driver                                                                                                     |
| Tension                           | 24VDC                                                                                                                   |
| Color temperature                 | 4000K                                                                                                                   |
| Luminous flux                     | 650lm                                                                                                                   |
| Initial luminaire efficacy        | 43lm/W                                                                                                                  |
| Initial chromaticity              | SDCM < 3                                                                                                                |
| Typ CRI                           | 90                                                                                                                      |
| IP class                          | 67                                                                                                                      |
| Dimensions                        | 100,5x3x9,25cm                                                                                                          |
| Materials                         | anodized aluminum                                                                                                       |
| Ambient temperature range         | - 20°C / 35°C                                                                                                           |
| Performance ambient temperature   | 25°C                                                                                                                    |
| Mechanical impact protection code | IK10                                                                                                                    |
| Notes                             | driver not included, 1-10V, DALI, DMX, Casambi,<br>cable length 1m, certified 500kg static load,<br>3500kg dynamic load |
| Customization options             | CCT 2700K, body length                                                                                                  |
| Accessories                       | Drivers 24VDC + DALI interface,                                                                                         |
| Net lamp weight                   | 3,5 kg                                                                                                                  |

Codes

BWLK0210G26NAA


Structure

grey

PACKAGE

Package 01      Dimension: 103x3x9 cm / Gross weight: 3,5 kg

Certificazioni

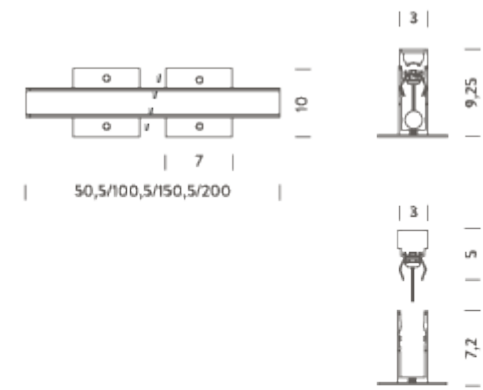

1M | 6000K

### LAMPING

|                                   |                                                                                                                         |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Source                            | LED strip                                                                                                               |
| Total power                       | 15W                                                                                                                     |
| Emission                          | diffused                                                                                                                |
| Switching                         | according to driver                                                                                                     |
| Tension                           | 24VDC                                                                                                                   |
| Color temperature                 | 6000K                                                                                                                   |
| Luminous flux                     | 650lm                                                                                                                   |
| Initial luminaire efficacy        | 43lm/W                                                                                                                  |
| Initial chromaticity              | SDCM < 3                                                                                                                |
| Typ CRI                           | 90                                                                                                                      |
| IP class                          | 67                                                                                                                      |
| Dimensions                        | 100,5x3x9,25cm                                                                                                          |
| Materials                         | anodized aluminum                                                                                                       |
| Ambient temperature range         | - 20° / +35°C                                                                                                           |
| Performance ambient temperature   | 25°C                                                                                                                    |
| Mechanical impact protection code | IK10                                                                                                                    |
| Notes                             | driver not included, 1-10V, DALI, DMX, Casambi,<br>cable length 1m, certified 500kg static load,<br>3500kg dynamic load |
| Customization options             | CCT 2700K, body length                                                                                                  |
| Accessories                       | Drivers 24VDC + DALI interface,                                                                                         |
| Net lamp weight                   | 3,5 kg                                                                                                                  |

### Codes

BWLK0210G260AA

### Structure


grey

### PACKAGE

Package 01

Dimension: 103x3x9 cm / Gross weight: 3,5 kg

### Certificazioni

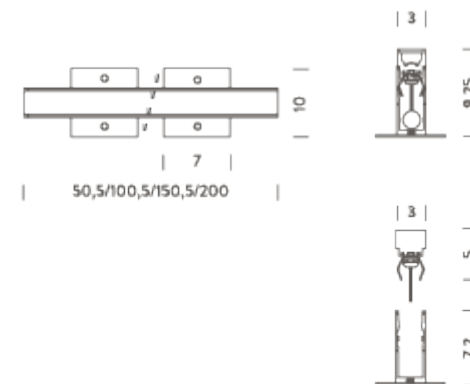

1,5M | 4000K

### LAMPING

|                                   |                                                                                                                         |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Source                            | LED strip                                                                                                               |
| Total power                       | 22,5W                                                                                                                   |
| Emission                          | diffused                                                                                                                |
| Switching                         | according to driver                                                                                                     |
| Tension                           | 24VDC                                                                                                                   |
| Color temperature                 | 4000K                                                                                                                   |
| Luminous flux                     | 975lm                                                                                                                   |
| Initial luminaire efficacy        | 43lm/W                                                                                                                  |
| Initial chromaticity              | SDCM < 3                                                                                                                |
| Typ CRI                           | 90                                                                                                                      |
| IP class                          | 67                                                                                                                      |
| Dimensions                        | 150,5x3x9,25cm                                                                                                          |
| Materials                         | anodized aluminum                                                                                                       |
| Ambient temperature range         | - 20°C / 35°C                                                                                                           |
| Performance ambient temperature   | 25°C                                                                                                                    |
| Mechanical impact protection code | IK10                                                                                                                    |
| Notes                             | driver not included, 1-10V, DALI, DMX, Casambi,<br>cable length 1m, certified 500kg static load,<br>3500kg dynamic load |
| Customization options             | CCT 2700K, body length                                                                                                  |
| Accessories                       | Drivers 24VDC + DALI interface,                                                                                         |
| Net lamp weight                   | 5,25 kg                                                                                                                 |

### Codes

BWLK0215G26NAA


### Structure

grey

### PACKAGE

Package 01      Dimension: 152x3x9 cm / Gross weight: 5,25 kg

### Certificazioni

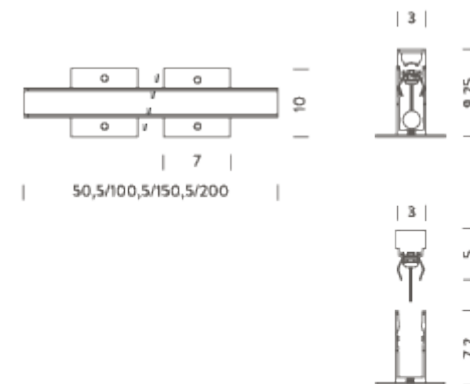

1,5M | 6000K

### LAMPING

|                                   |                                                                                                                         |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Source                            | LED strip                                                                                                               |
| Total power                       | 22,5W                                                                                                                   |
| Emission                          | diffused                                                                                                                |
| Switching                         | according to driver                                                                                                     |
| Tension                           | 24VDC                                                                                                                   |
| Color temperature                 | 6000K                                                                                                                   |
| Luminous flux                     | 975lm                                                                                                                   |
| Initial luminaire efficacy        | 430lm/W                                                                                                                 |
| Initial chromaticity              | SDCM < 3                                                                                                                |
| Typ CRI                           | 90                                                                                                                      |
| IP class                          | 67                                                                                                                      |
| Dimensions                        | 150,5x3x9,25cm                                                                                                          |
| Materials                         | anodized aluminum                                                                                                       |
| Ambient temperature range         | - 20° / +35°C                                                                                                           |
| Performance ambient temperature   | 25°C                                                                                                                    |
| Mechanical impact protection code | IK10                                                                                                                    |
| Notes                             | driver not included, 1-10V, DALI, DMX, Casambi,<br>cable length 1m, certified 500kg static load,<br>3500kg dynamic load |
| Customization options             | CCT 2700K, body length                                                                                                  |
| Accessories                       | Drivers 24VDC + DALI interface,                                                                                         |
| Net lamp weight                   | 5,25 kg                                                                                                                 |

### Codes

BWLK0215G260AA

### Structure


grey

### PACKAGE

Package 01

Dimension: 152x3x9 cm / Gross weight: 5,25 kg

### Certificazioni

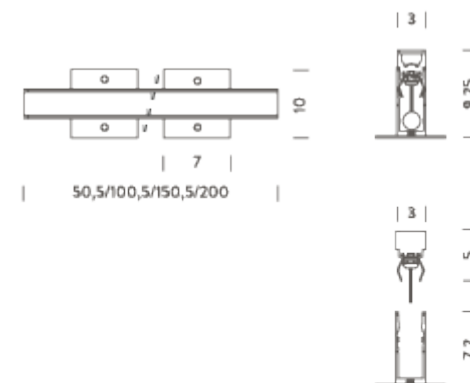

2M | 4000K

LAMPING

|                                   |                                                                                                                         |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Source                            | LED strip                                                                                                               |
| Total power                       | 30W                                                                                                                     |
| Emission                          | diffused                                                                                                                |
| Switching                         | according to driver                                                                                                     |
| Tension                           | 24VDC                                                                                                                   |
| Color temperature                 | 4000K                                                                                                                   |
| Luminous flux                     | 1300lm                                                                                                                  |
| Initial luminaire efficacy        | 43lm/W                                                                                                                  |
| Initial chromaticity              | SDCM < 3                                                                                                                |
| Typ CRI                           | 90                                                                                                                      |
| IP class                          | 67                                                                                                                      |
| Dimensions                        | 200x3x9,25cm                                                                                                            |
| Materials                         | anodized aluminium                                                                                                      |
| Ambient temperature range         | - 20°C / 35°C                                                                                                           |
| Performance ambient temperature   | 25°C                                                                                                                    |
| Mechanical impact protection code | IK10                                                                                                                    |
| Notes                             | driver not included, 1-10V, DALI, DMX, Casambi,<br>cable length 1m, certified 500kg static load,<br>3500kg dynamic load |
| Customization options             | CCT 2700K, body length                                                                                                  |
| Accessories                       | Drivers 24VDC + DALI interface,                                                                                         |
| Net lamp weight                   | 7 kg                                                                                                                    |

Codes

BWLK0220G26NAA


Structure

grey

PACKAGE

Package 01      Dimension: 200x3x9 cm / Gross weight: 7 kg

Certificazioni

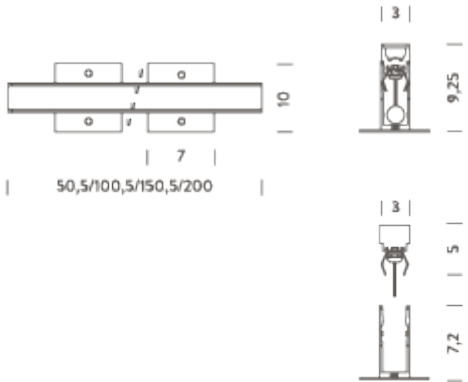



2M | 6000K

LAMPING

|                                   |                                                                                                                         |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Source                            | LED strip                                                                                                               |
| Total power                       | 30W                                                                                                                     |
| Emission                          | diffused                                                                                                                |
| Switching                         | according to driver                                                                                                     |
| Tension                           | 24VDC                                                                                                                   |
| Color temperature                 | 6000K                                                                                                                   |
| Luminous flux                     | 1300lm                                                                                                                  |
| Initial luminaire efficacy        | 43lm/W                                                                                                                  |
| Initial chromaticity              | SDCM < 3                                                                                                                |
| Typ CRI                           | 90                                                                                                                      |
| IP class                          | 67                                                                                                                      |
| Dimensions                        | 200x3x9,25cm                                                                                                            |
| Materials                         | anodized aluminium                                                                                                      |
| Ambient temperature range         | - 20°C / 35°C                                                                                                           |
| Performance ambient temperature   | 25°C                                                                                                                    |
| Mechanical impact protection code | IK10                                                                                                                    |
| Notes                             | driver not included, 1-10V, DALI, DMX, Casambi,<br>cable length 1m, certified 500kg static load,<br>3500kg dynamic load |
| Customization options             | CCT 2700K, body length                                                                                                  |
| Accessories                       | Drivers 24VDC + DALI interface,                                                                                         |
| Net lamp weight                   | 7 kg                                                                                                                    |

Codes

BWLK0220G260AA

Structure

grey

PACKAGE

Package 01      Dimension: 200x3x9 cm / Gross weight: 7 kg

Certificazioni

