

RIGA OPAL

RIGA è un famiglia di prodotti che racchiude una selezione di LED strips flessibili per esterni, particolarmente adatta ad un'illuminazione decorativa. Riga è costituito da un nastro LED a 24V inguainato in un profilo in PVC bianco e incapsulato in una resina poliuretanica opale, estremamente resistente agli agenti atmosferici e con un eccellente grado di stabilità se esposta a raggi UV. Permette un'emissione laterale o frontale della luce a seconda della possibilità di curvatura della LED strip. Riga è proposto in differenti lunghezze. Il fissaggio può avvenire tramite staffette (incluse).



1M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible LED strip
Total power	9,6W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	510lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

Codes

MRIG0910G35WFL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

Certificazioni

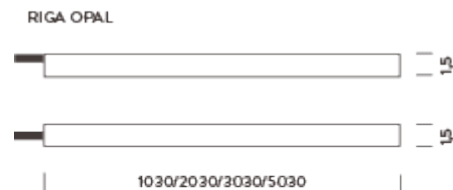

BRACKETS (included)



1M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible LED strip
Total power	9,6W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	510lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

Codes

MRIG0910G35WSL

PACKAGE

Package 01


Certificazioni



Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

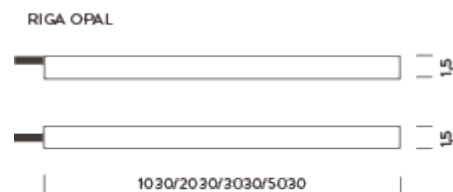

BRACKETS (included)



1M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible LED strip
Total power	9,6W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	600lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

Codes

MRIG0910G35NFL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

Certificazioni

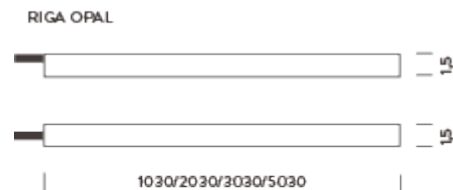

BRACKETS (included)



1M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible LED strip
Total power	9,6W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	600lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

Codes

MRIG0910G35NSL

PACKAGE

Package 01


Certificazioni



Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

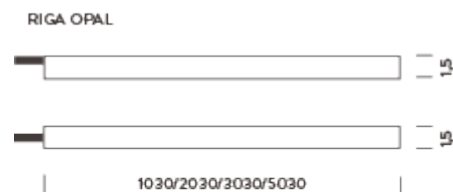

BRACKETS (included)



2M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible LED strip
Total power	19,2W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1020lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

Codes

MRIG0920G35WFL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,46 kg

Certificazioni

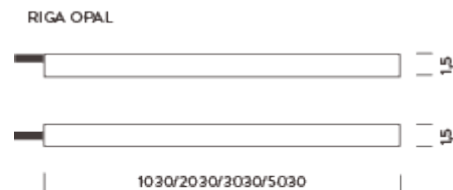

BRACKETS (included)



2M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible LED strip
Total power	19,2W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1020lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

Codes

MRIG0920G35WSL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,46 kg

Certificazioni

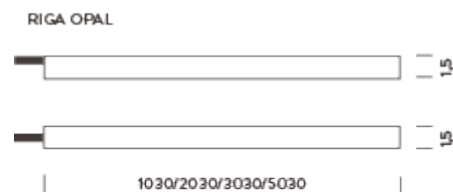

BRACKETS (included)



2M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible LED strip
Total power	19,2W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

Codes

MRIG0920G35NFL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,46 kg

Certificazioni

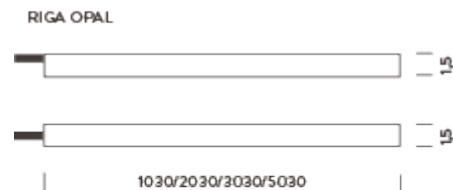

BRACKETS (included)



2M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible LED strip
Total power	19,2W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

Codes

MRIG0920G35NSL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,46 kg

Certificazioni

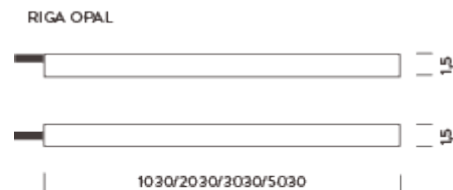

BRACKETS (included)



3M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible LED strip
Total power	28,8W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1530lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

Codes

MRIG0930G35WFL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

Certificazioni

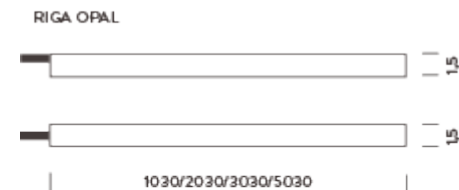

BRACKETS (included)



3M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible LED strip
Total power	28,8W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1530lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

Codes

MRIG0930G35WSL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

Certificazioni

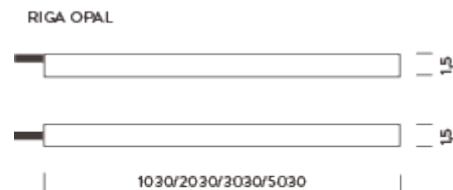

BRACKETS (included)



3M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible LED strip
Total power	28,8W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1800lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

Codes

MRIG0930G35NFL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

Certificazioni

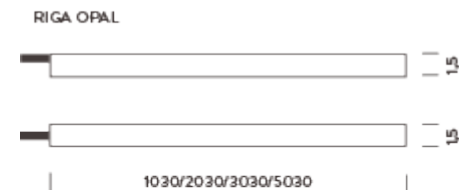

BRACKETS (included)



3M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible LED strip
Total power	28,8W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1800lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

Codes

MRIG0930G35NSL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

Certificazioni

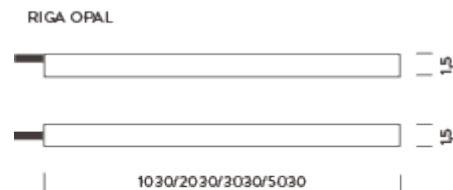

BRACKETS (included)



4M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible LED strip
Total power	38,4W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2040lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,73 kg

Codes

MRIG0940G35WFL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

Certificazioni

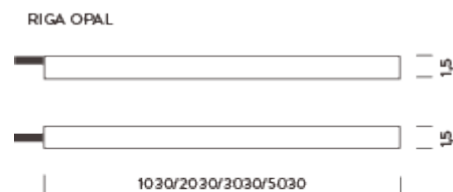

BRACKETS (included)



4M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible LED strip
Total power	38,4W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2040lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,73 kg

Codes

MRIG0940G35WSL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

Certificazioni

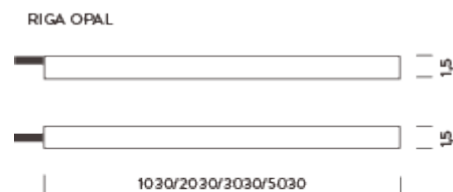

BRACKETS (included)



4M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible LED strip
Total power	38,4W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2400lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,73 kg

Codes

MRIG0940G35NFL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

Certificazioni

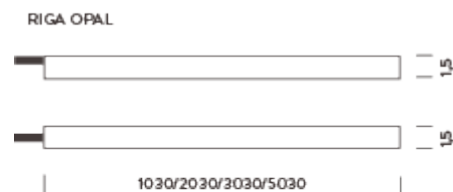

BRACKETS (included)



4M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible LED strip
Total power	38,4W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2400lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,73 kg

Codes

MRIG0940G35NSL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

Certificazioni

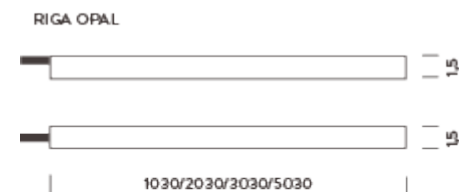

BRACKETS (included)



5M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible LED strip
Total power	48W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2550lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

Codes

MRIG0950G35WFL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 2,37 kg

Certificazioni

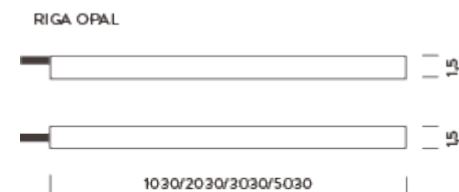

BRACKETS (included)



5M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible LED strip
Total power	48W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2550lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

Codes

MRIG0950G35WSL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 2,37 kg

Certificazioni

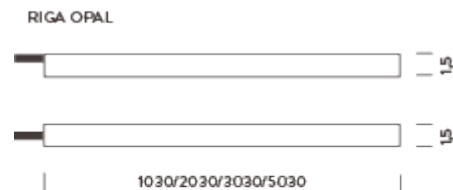

BRACKETS (included)



5M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible LED strip
Total power	48W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3000lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

Codes

MRIG0950G35NFL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 2,37 kg

Certificazioni

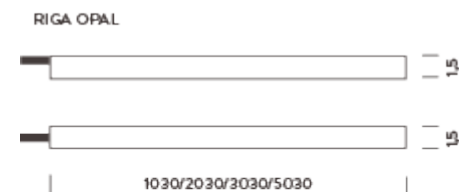

BRACKETS (included)



5M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible LED strip
Total power	48W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3000lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

Codes

MRIG0950G35NSL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 2,37 kg

Certificazioni

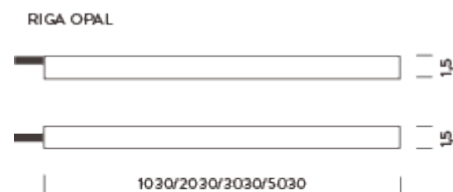

BRACKETS (included)

