

ELBA

Famiglia di faretti da interni per illuminazione d'accento. L'apparecchio può essere ruotato di 90 ° in verticale e di 355 ° a livello orizzontale, per orientare la luce secondo necessità. La struttura di dissipazione del calore e il driver integrato, sono perfettamente combinati insieme. Il design integrato rende il prodotto compatto e minimale. Il fascio ottico regolabile permette di soddisfare qualsiasi esigenza di illuminazione.



DIMMABLE TRIAC | 2700K

LAMPING

Source	1x LED COB
Total power	13W
Emission	direct adjustable 15°-55°
Switching	dimnable TRIAC
Tension	220/240V
Color temperature	2700K
Luminous flux	830lm
Initial luminaire efficacy	64lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø5,6x15cm
Materials	aluminum
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with TRACK 3C/0-10V
Net lamp weight	0,5 kg

Codes

ELB LW2 81
ELB LN2 81

Structure


white
black

PACKAGE

Package 01

Dimension: 21x19x6 cm / Gross weight: 0,7 kg

Certificazioni

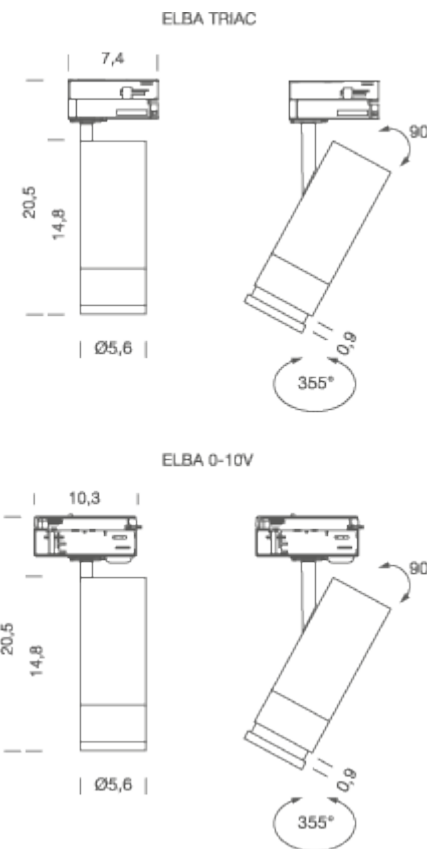

DIMMABLE TRIAC | 3000K

LAMPING

Source	1x LED COB
Total power	13W
Emission	direct adjustable 15°-55°
Switching	dimnable TRIAC
Tension	220/240V
Color temperature	3000K
Luminous flux	900lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø5,6x15cm
Materials	aluminum
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with TRACK 3C/0-10V
Net lamp weight	0,5 kg

Codes

ELB LW3 81

ELB LN3 81

Structure

white


black

PACKAGE

Package 01

Dimension: 21x19x6 cm / Gross weight: 0,7 kg

Certificazioni

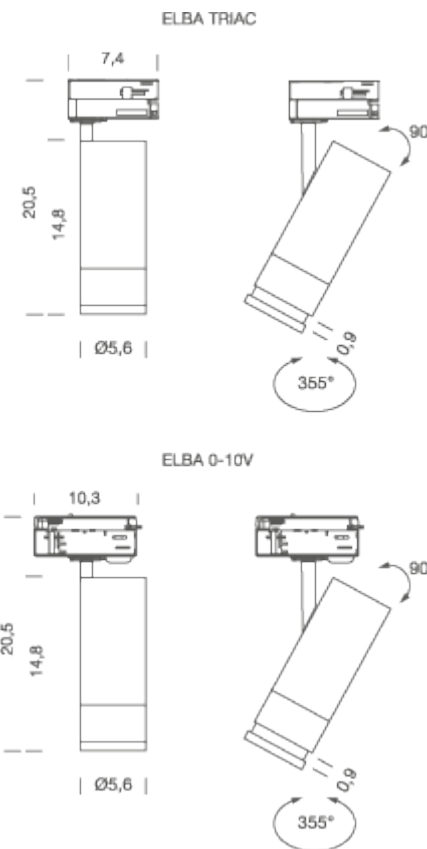

DIMMABLE 0-10V | 2700K

LAMPING

Source	1x LED COB
Total power	13W
Emission	direct adjustable 15°-55°
Switching	dimmable 0-10V
Tension	220/240V
Color temperature	2700K
Luminous flux	830lm
Initial luminaire efficacy	64lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø5,6x15cm
Materials	aluminum
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with TRACK 3C/0-10V
Net lamp weight	0,5 kg

Codes

ELB LW2 82
ELB LN2 82

Structure


white
black

PACKAGE

Package 01

Dimension: 21x19x6 cm / Gross weight: 0,7 kg

Certificazioni

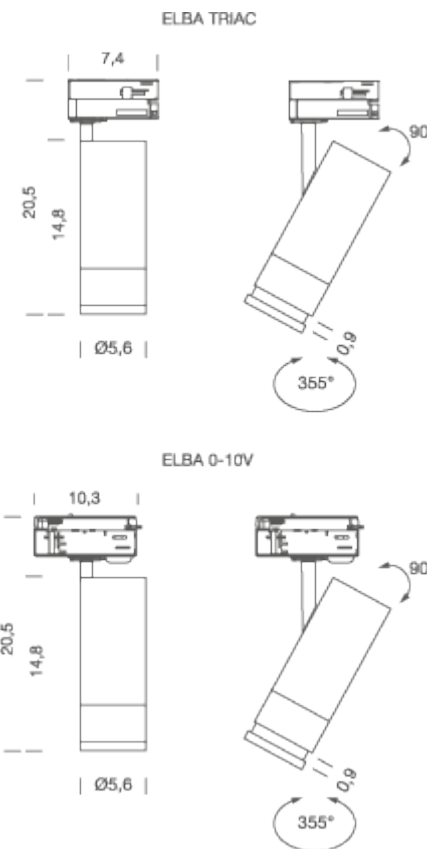

DIMMABLE 0-10V | 3000K

LAMPING

Source	1x LED COB
Total power	13W
Emission	direct adjustable 15°-55°
Switching	dimnable 0-10V
Tension	220/240V
Color temperature	3000K
Luminous flux	900lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø5,6x15cm
Materials	aluminum
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with TRACK 3C/0-10V
Net lamp weight	0,5 kg

Codes

ELB LW3 82
ELB LN3 82

Structure

white
black

PACKAGE

Package 01

Dimension: 21x19x6 cm / Gross weight: 0,7 kg

Certificazioni

