

# CAPRI

Famiglia di faretti da interni per illuminazione d'accento. L'apparecchio è ruotabile di 90° sull'asse verticale e di 355° sull'asse orizzontale. L'eccellente struttura di dissipazione del calore e il driver integrato, sono perfettamente combinati insieme. Il design integrato rende l'aspetto più compatto e minimale. L'angolo del fascio regolabile consente di soddisfare qualsiasi esigenza di illuminazione.



## DIMMABLE TRIAC | 2700K

### LAMPING

|                                   |                                                                                                                  |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                                       |
| Total power                       | 23W                                                                                                              |
| Emission                          | direct adjustable 15°-55°                                                                                        |
| Switching                         | Dimmable triac                                                                                                   |
| Tension                           | 220/240V                                                                                                         |
| Color temperature                 | 2700K                                                                                                            |
| Luminous flux                     | 1600lm                                                                                                           |
| Initial luminaire efficacy        | 70lm/W                                                                                                           |
| Initial chromaticity              | SDCM<3                                                                                                           |
| Typ CRI                           | 90                                                                                                               |
| IP class                          | 20                                                                                                               |
| Dimensions                        | ø7,3x17cm                                                                                                        |
| Ambient temperature range         | 0°C / +35°C                                                                                                      |
| Performance ambient temperature   | 25°C                                                                                                             |
| Mechanical impact protection code | IK02                                                                                                             |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V |
| Net lamp weight                   | 1 kg                                                                                                             |

### Codes

CAP LW2 81  
CAP LN2 81

### Structure

white  
black

### PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


### Certificazioni




CAPRI TRIAC/CASAMBI

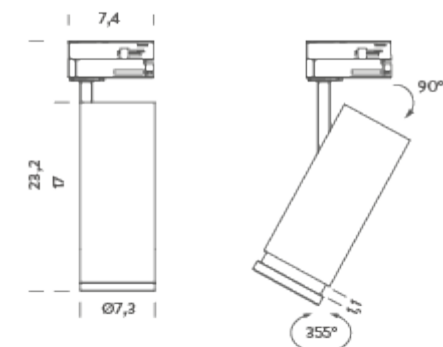

CAPRI 0-10V/DALI

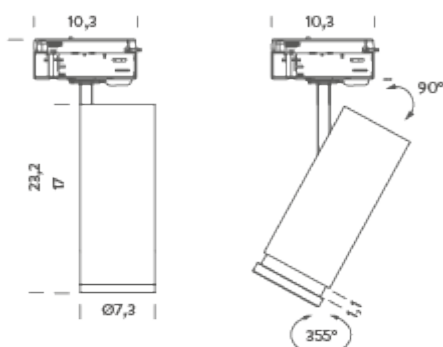

CAPRI DOB

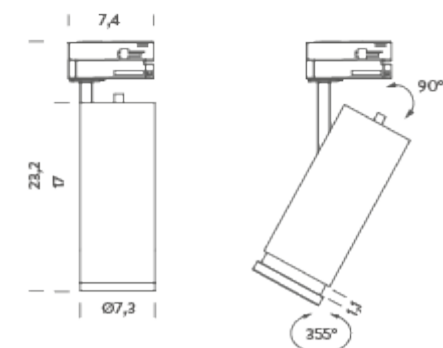

## DIMMABLE TRIAC | 3000K

### LAMPING

|                                   |                                                                                                                  |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                                       |
| Total power                       | 23W                                                                                                              |
| Emission                          | direct adjustable 15°-55°                                                                                        |
| Switching                         | Dimmable triac                                                                                                   |
| Tension                           | 220/240V                                                                                                         |
| Color temperature                 | 3000K                                                                                                            |
| Luminous flux                     | 1780lm                                                                                                           |
| Initial luminaire efficacy        | 77lm/W                                                                                                           |
| Typ CRI                           | 90                                                                                                               |
| IP class                          | 20                                                                                                               |
| Dimensions                        | ø7,3x17cm                                                                                                        |
| Ambient temperature range         | 0°C / +35°C                                                                                                      |
| Performance ambient temperature   | 25°C                                                                                                             |
| Mechanical impact protection code | IK02                                                                                                             |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V |
| Net lamp weight                   | 1 kg                                                                                                             |

### Codes

CAP LW3 81  
CAP LN3 81

### Structure

white  
black

### PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


### Certificazioni




CAPRI TRIAC/CASAMBI

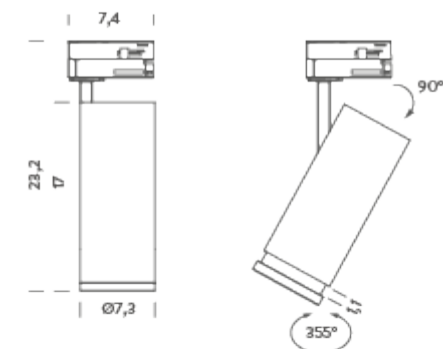

CAPRI 0-10V/DALI

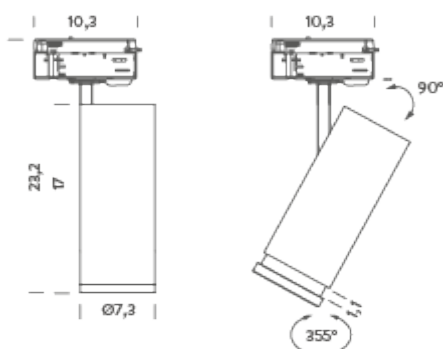

CAPRI DOB

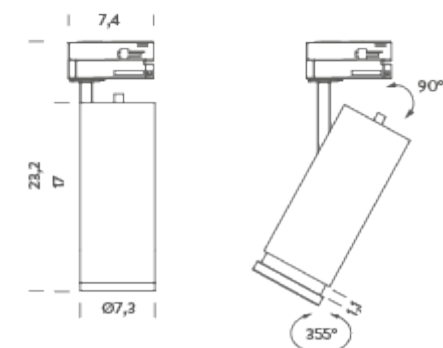

## DIMMABLE 0-10V | 2700K

### LAMPING

|                                   |                                                                                                                  |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                                       |
| Total power                       | 23W                                                                                                              |
| Emission                          | direct adjustable 15°-55°                                                                                        |
| Switching                         | Dimmable 0-10V                                                                                                   |
| Tension                           | 220/240V                                                                                                         |
| Color temperature                 | 2700K                                                                                                            |
| Luminous flux                     | 1600lm                                                                                                           |
| Initial luminaire efficacy        | 70lm/W                                                                                                           |
| Initial chromaticity              | SDCM<3                                                                                                           |
| Typ CRI                           | 90                                                                                                               |
| IP class                          | 20                                                                                                               |
| Dimensions                        | ø7,3x17cm                                                                                                        |
| Ambient temperature range         | 0°C / +35°C                                                                                                      |
| Performance ambient temperature   | 25°C                                                                                                             |
| Mechanical impact protection code | IK02                                                                                                             |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V |
| Net lamp weight                   | 1 kg                                                                                                             |

### Codes

CAP LW2 82  
CAP LN2 82

### Structure

white  
black

### PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


### Certificazioni




CAPRI TRIAC/CASAMBI

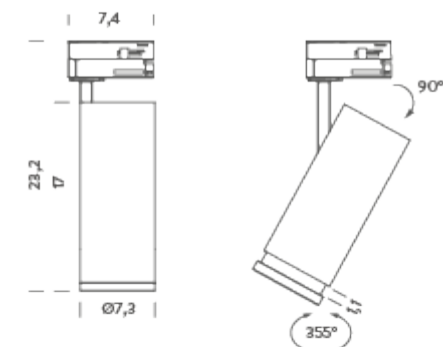

CAPRI 0-10V/DALI

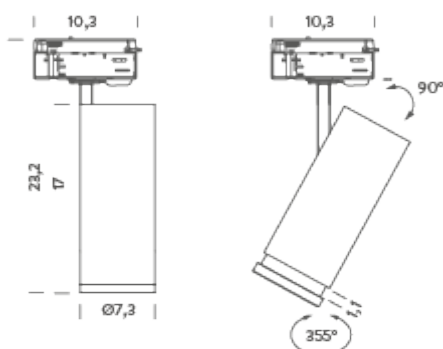

CAPRI DOB

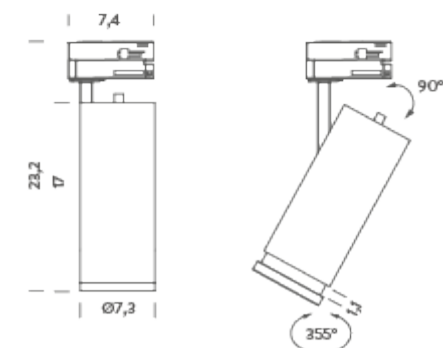

## DIMMABLE 0-10V | 3000K

### LAMPING

|                                   |                                                                                                                  |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                                       |
| Total power                       | 23W                                                                                                              |
| Emission                          | direct adjustable 15°-55°                                                                                        |
| Switching                         | Dimmable 0-10V                                                                                                   |
| Tension                           | 220/240V                                                                                                         |
| Color temperature                 | 3000K                                                                                                            |
| Luminous flux                     | 1780lm                                                                                                           |
| Initial luminaire efficacy        | 77lm/W                                                                                                           |
| Initial chromaticity              | SDCM<3                                                                                                           |
| Typ CRI                           | 90                                                                                                               |
| IP class                          | 20                                                                                                               |
| Dimensions                        | ø7,3x17cm                                                                                                        |
| Ambient temperature range         | 0°C / +35°C                                                                                                      |
| Performance ambient temperature   | 25°C                                                                                                             |
| Mechanical impact protection code | IK02                                                                                                             |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V |
| Net lamp weight                   | 1 kg                                                                                                             |

### Codes

CAP LW3 82  
CAP LN3 82

### Structure

white  
black

### PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


### Certificazioni




CAPRI TRIAC/CASAMBI

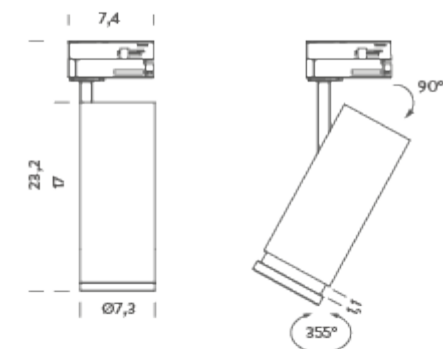

CAPRI 0-10V/DALI

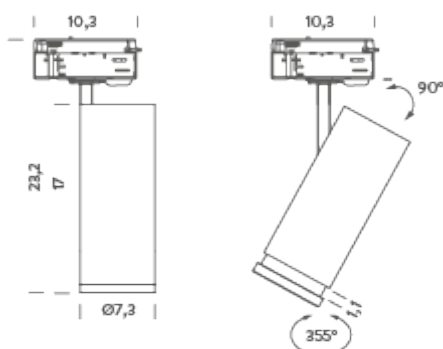

CAPRI DOB

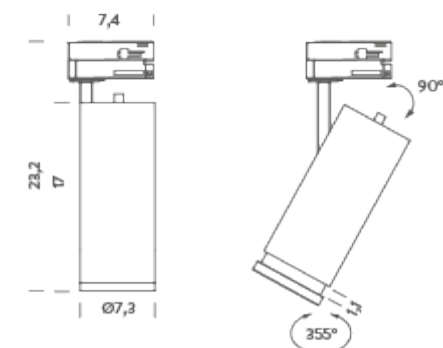

## DIMMABLE DALI | 2700K

### LAMPING

|                                   |                                                                                                                  |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                                       |
| Total power                       | 23W                                                                                                              |
| Emission                          | direct adjustable 15°-55°                                                                                        |
| Switching                         | Dimmable DALI                                                                                                    |
| Tension                           | 220/240V                                                                                                         |
| Color temperature                 | 2700K                                                                                                            |
| Luminous flux                     | 1600lm                                                                                                           |
| Initial luminaire efficacy        | 70lm/W                                                                                                           |
| Initial chromaticity              | SDCM<3                                                                                                           |
| Typ CRI                           | 90                                                                                                               |
| IP class                          | 20                                                                                                               |
| Dimensions                        | ø7,3x17cm                                                                                                        |
| Ambient temperature range         | 0°C / +35°C                                                                                                      |
| Performance ambient temperature   | 25°C                                                                                                             |
| Mechanical impact protection code | IK02                                                                                                             |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V |
| Net lamp weight                   | 1 kg                                                                                                             |

### Codes

CAP LW2 83

CAP LN2 83

### Structure

white

black

### PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


### Certificazioni




CAPRI TRIAC/CASAMBI

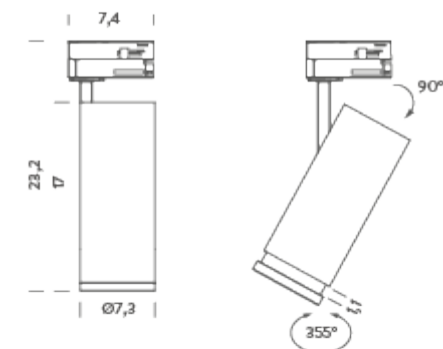

CAPRI 0-10V/DALI

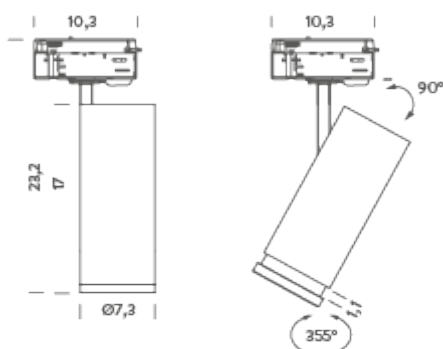

CAPRI DOB

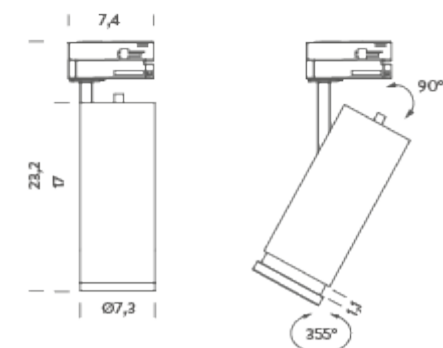

## DIMMABLE DALI | 3000K

### LAMPING

|                                   |                                                                                                                  |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                                       |
| Total power                       | 23W                                                                                                              |
| Emission                          | direct adjustable 15°-55°                                                                                        |
| Switching                         | Dimmable DALI                                                                                                    |
| Tension                           | 220/240V                                                                                                         |
| Color temperature                 | 3000K                                                                                                            |
| Luminous flux                     | 1780lm                                                                                                           |
| Initial luminaire efficacy        | 77lm/W                                                                                                           |
| Initial chromaticity              | SDCM<3                                                                                                           |
| Typ CRI                           | 90                                                                                                               |
| IP class                          | 20                                                                                                               |
| Dimensions                        | ø7,3x17cm                                                                                                        |
| Ambient temperature range         | 0°C / +35°C                                                                                                      |
| Performance ambient temperature   | 25°C                                                                                                             |
| Mechanical impact protection code | IK02                                                                                                             |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V |
| Net lamp weight                   | 1 kg                                                                                                             |

### Codes

CAP LW3 83

CAP LN3 83

### Structure

white

black

### PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


### Certificazioni




CAPRI TRIAC/CASAMBI

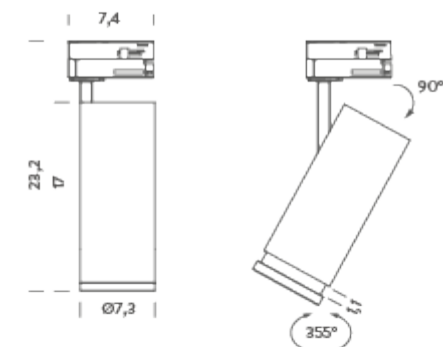

CAPRI 0-10V/DALI

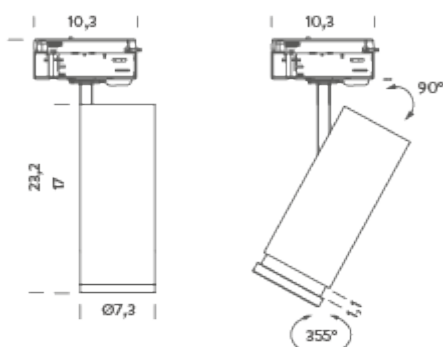

CAPRI DOB

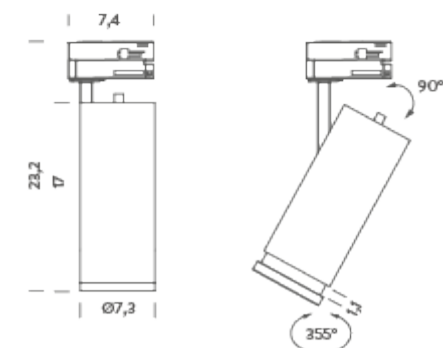

## DIMMER ON BOARD 1-10V | 2700K

### LAMPING

|                                   |                                                                                                                  |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                                       |
| Total power                       | 23W                                                                                                              |
| Emission                          | direct adjustable 15°55°                                                                                         |
| Switching                         | dimmer on board                                                                                                  |
| Tension                           | 220/240V                                                                                                         |
| Color temperature                 | 2700K                                                                                                            |
| Luminous flux                     | 1600lm                                                                                                           |
| Initial luminaire efficacy        | 70lm/W                                                                                                           |
| Initial chromaticity              | SDCM<3                                                                                                           |
| Typ CRI                           | 90                                                                                                               |
| IP class                          | 20                                                                                                               |
| Dimensions                        | ø7,3x17cm                                                                                                        |
| Ambient temperature range         | 0°C / +35°C                                                                                                      |
| Performance ambient temperature   | 25°                                                                                                              |
| Mechanical impact protection code | IK02                                                                                                             |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V |
| Net lamp weight                   | 1 kg                                                                                                             |

### Codes

CAPLN2 84  
CAP LW2 84

### Structure

black  
white

### PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


### Certificazioni




CAPRI TRIAC/CASAMBI

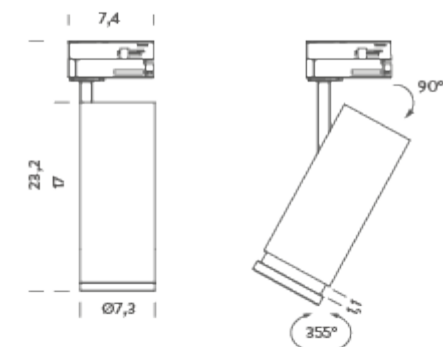

CAPRI 0-10V/DALI

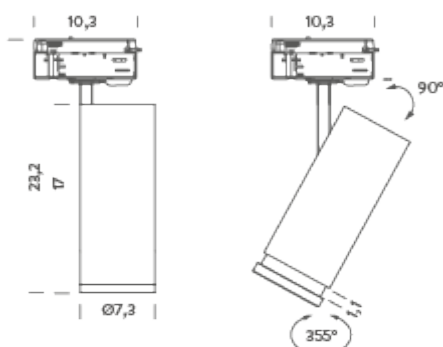

CAPRI DOB

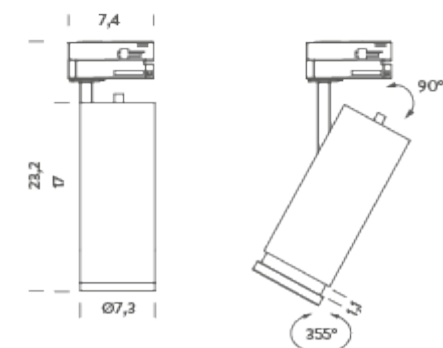

## DIMMER ON BOARD 1-10V | 3000K

### LAMPING

|                                   |                                                                                                                  |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                                       |
| Total power                       | 23W                                                                                                              |
| Emission                          | direct adjustable 15°-55°                                                                                        |
| Switching                         | dimmer on board                                                                                                  |
| Tension                           | 220/240V                                                                                                         |
| Color temperature                 | 3000K                                                                                                            |
| Luminous flux                     | 1780lm                                                                                                           |
| Initial luminaire efficacy        | 77lm/W                                                                                                           |
| Initial chromaticity              | SDCM<3                                                                                                           |
| Typ CRI                           | 90                                                                                                               |
| IP class                          | 20                                                                                                               |
| Dimensions                        | ø7,3x17                                                                                                          |
| Ambient temperature range         | 0°C / +35°C                                                                                                      |
| Performance ambient temperature   | 25°C                                                                                                             |
| Mechanical impact protection code | IK02                                                                                                             |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V |
| Net lamp weight                   | 1 kg                                                                                                             |

### Codes

CAP LN3 84  
CAP LW3 84

### Structure

black  
white

### PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


### Certificazioni

UK  
CA


CAPRI TRIAC/CASAMBI

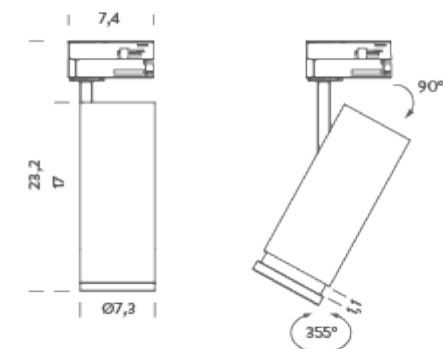

CAPRI 0-10V/DALI

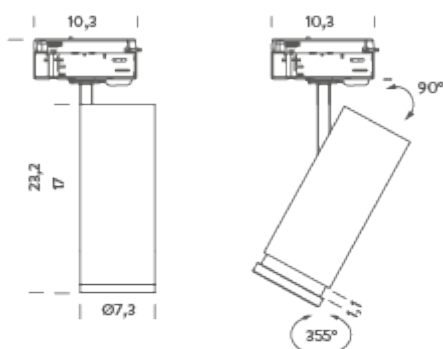

CAPRI DOB

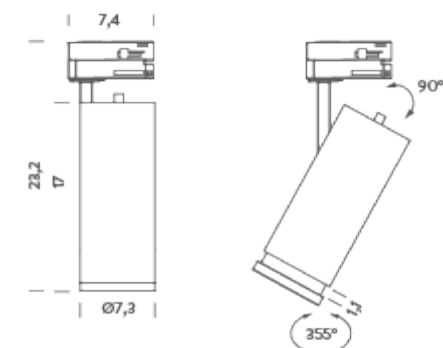

## CASAMBI (BLUETOOTH) | 2700K

### LAMPING

|                                   |                                                                                                                  |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                                       |
| Total power                       | 23W                                                                                                              |
| Emission                          | direct adjustable 15°-55°                                                                                        |
| Switching                         | CASAMBI (bluetooth)                                                                                              |
| Tension                           | 220/240V                                                                                                         |
| Color temperature                 | 2700K                                                                                                            |
| Luminous flux                     | 1600lm                                                                                                           |
| Initial luminaire efficacy        | 70lm/W                                                                                                           |
| Initial chromaticity              | SDCM<3                                                                                                           |
| Typ CRI                           | 90                                                                                                               |
| IP class                          | 20                                                                                                               |
| Dimensions                        | ø7,3x17                                                                                                          |
| Ambient temperature range         | 0°C / +35°C                                                                                                      |
| Performance ambient temperature   | 25°C                                                                                                             |
| Mechanical impact protection code | IK02                                                                                                             |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V |
| Net lamp weight                   | 1 kg                                                                                                             |

### Codes

CAP LN2 85  
CAP LW2 85

### Structure

black  
white

### PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


### Certificazioni

UK  
CA


CAPRI TRIAC/CASAMBI

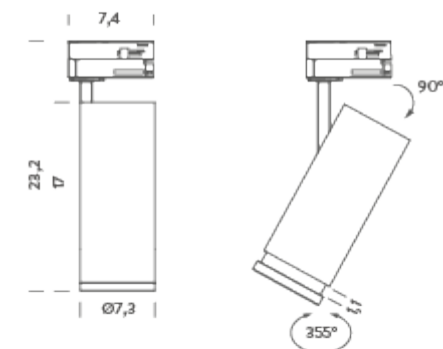

CAPRI 0-10V/DALI

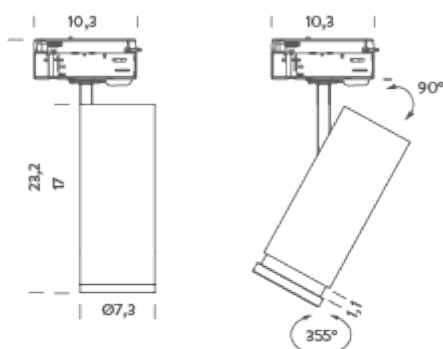

CAPRI DOB

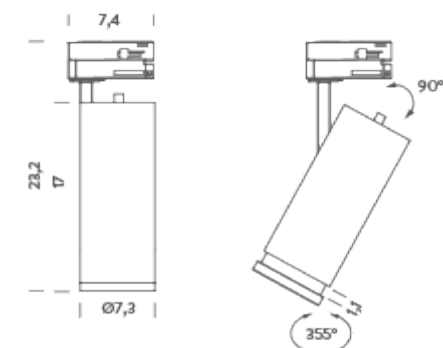

## CASAMBI (BLUETOOTH) | 3000K

### LAMPING

|                                   |                                                                                                                  |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                                       |
| Total power                       | 23W                                                                                                              |
| Emission                          | direct adjustable 15°-55°                                                                                        |
| Switching                         | CASAMBI (bluetooth)                                                                                              |
| Tension                           | 220/240V                                                                                                         |
| Color temperature                 | 3000K                                                                                                            |
| Luminous flux                     | 1780lm                                                                                                           |
| Initial luminaire efficacy        | 77lm/W                                                                                                           |
| Initial chromaticity              | SDCM<3                                                                                                           |
| Typ CRI                           | 90                                                                                                               |
| IP class                          | 20                                                                                                               |
| Dimensions                        | ø7,3x17                                                                                                          |
| Ambient temperature range         | 0°C / +35°C                                                                                                      |
| Performance ambient temperature   | 25°C                                                                                                             |
| Mechanical impact protection code | IK02                                                                                                             |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V |
| Net lamp weight                   | 1 kg                                                                                                             |

### Codes

CAP LN3 85  
CAP LW3 85

### Structure

black  
white

### PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


### Certificazioni



CAPRI TRIAC/CASAMBI

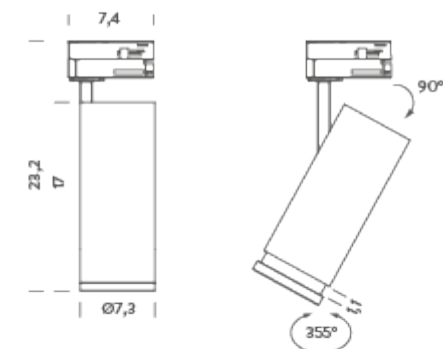

CAPRI 0-10V/DALI

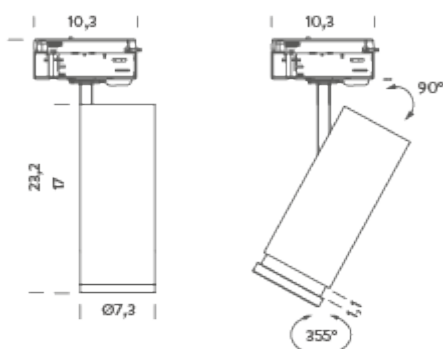

CAPRI DOB

