

ALICUDI

Famiglia di faretti ad incasso downlight per illuminazione d'accento in interni.

Alicudi è proposto in differenti finiture, fasci ottici e temperature colore. Il design minimal, la luce soft senza abbagliamento e la facilità di installazione, rendono Alicudi il faretto adatto per soddisfare le diverse necessità di illuminazione.



RECESSED TRIM 30° | 2700K

LAMPING

Source	LED
Total power	2,5W
Emission	direct adjustable 30°
Switching	according to driver
Tension	700mA
Color temperature	2700K
Luminous flux	155lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	> 90
Energy class	G
IP class	20
Dimensions	ø4x3,9cm
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver not included, trim spot recessed hole Ø 35mm, depth 100mm, cable length 0,5m, series connection
Accessories	Drivers, Alicudi
Net lamp weight	0,07 kg

Codes

ALT LW2 63
ALT LN2 63

Structure

white
black

PACKAGE


Package 01

Dimension: 5x5x4 cm / Gross weight: 0,09 kg

Certificazioni



ALICUDI

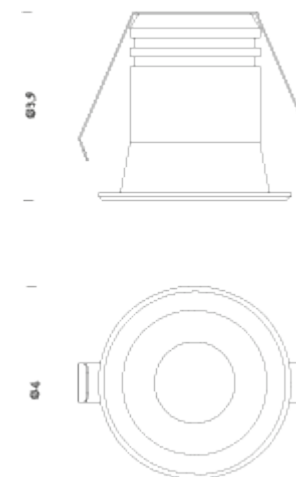

RECESSED TRIM 30° | 3000K

LAMPING

Source	LED
Total power	2,5W
Emission	direct adjustable 30°
Switching	according to driver
Tension	700mA
Color temperature	3000K
Luminous flux	190lm
Initial luminaire efficacy	76lm/W
Initial chromaticity	SDCM<3
Typ CRI	> 90
Energy class	G
IP class	20
Dimensions	ø4x3,9cm
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver not included, trim spot recessed hole Ø 35mm, depth 100mm, cable length 0,5m, series connection
Accessories	Drivers, Alicudi
Net lamp weight	0,07 kg

Codes

ALT LW3 63
ALT LN3 63

Structure

white
black

PACKAGE

Package 01

Dimension: 5x5x4 cm / Gross weight: 0,09 kg

Certificazioni



ALICUDI

