

Massimo Colagrande

PLINT

PLINT è uno spot a LED che irrompe nel mondo dell'illuminazione d'accento invertendone il paradigma, grazie ad un'elevata flessibilità di posizionamento.

Racchiude al suo interno design e contenuto tecnologico consentendo un'illuminazione discreta e al tempo stesso precisa.

All'interno di una struttura metallica è integrato uno spot ad alte prestazioni con ottica variabile con zoom on-board, che ne permette la regolazione del fascio di luce.

L'orientabilità del faretto direziona l'emissione luminosa a seconda delle specifiche necessità.

PLINT è proposto con finitura nera e con due differenti temperature colore.

Il dimmer on-board inoltre, permette di modulare l'illuminazione in modo puntuale.



2700K

LAMPING

Source	LED
Total power	13W
Emission	direct adjustable 15°-55°
Switching	push dim on board
Tension	220/240V
Color temperature	2700K
Luminous flux	900lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	18,7x7,5x12,7
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	driver integrated, adjustable beam 15°-55°, orientable spot 90°, cable length 3m
Net lamp weight	1,3 kg

Codes

PLT LN2 11

Structure


black

PACKAGE

Package 01

Dimension: 30x23x13 cm / Net weight: 0,5 kg /
Gross weight: 1,8 kg

Certificazioni

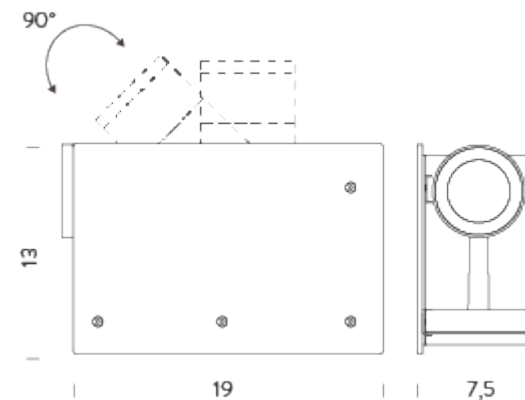

3000K

LAMPING

Source	LED
Total power	13W
Emission	direct adjustable 15°-55°
Switching	push dim on board
Tension	220/240V
Color temperature	3000K
Luminous flux	900lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	18,7x7,5x12,7
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	driver integrated, adjustable beam 15°-55°, orientable spot 90°, cable length 3m
Net lamp weight	1,3 kg

Codes

PLT LN3 11

Structure


black

PACKAGE

Package 01

Dimension: 30x23x13 cm / Net weight: 0,5 kg /
Gross weight: 1,8 kg

Certificazioni

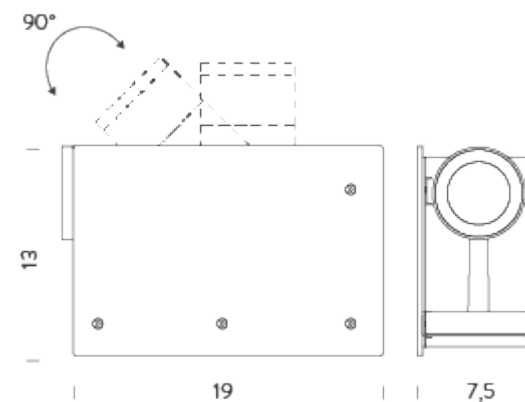

4000K

LAMPING

Source	LED
Total power	13W
Emission	direct adjustable 15°-55°
Switching	push dim on board
Tension	220/240V
Color temperature	4000K
Luminous flux	900lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	18,7x7,5x12,7
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	driver integrated, adjustable beam 15°-55°, orientable spot 90°, cable length 3m
Net lamp weight	1,3 kg

Codes

PLT LN4 11

Structure

black

PACKAGE

Package 01	Dimension: 30x23x13 cm / Net weight: 0,5 kg / Gross weight: 1,8 kg
------------	---

Certificazioni

