

CAPRI CEILING

Famiglia di faretti da interni per illuminazione d'accento. L'apparecchio è ruotabile di 90° sull'asse verticale e di 355° sull'asse orizzontale. L'eccellente struttura di dissipazione del calore e il driver integrato, sono perfettamente combinati insieme. Il design integrato rende l'aspetto più compatto e minimale. L'angolo del fascio regolabile consente di soddisfare qualsiasi esigenza di illuminazione.



DIMMABLE TRIAC | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	dimmable TRIAC
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/w
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x20cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°
Net lamp weight	1 kg

Codes

CAP LW2 41
CAP LN2 41

Structure


white
black

PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

Certificazioni

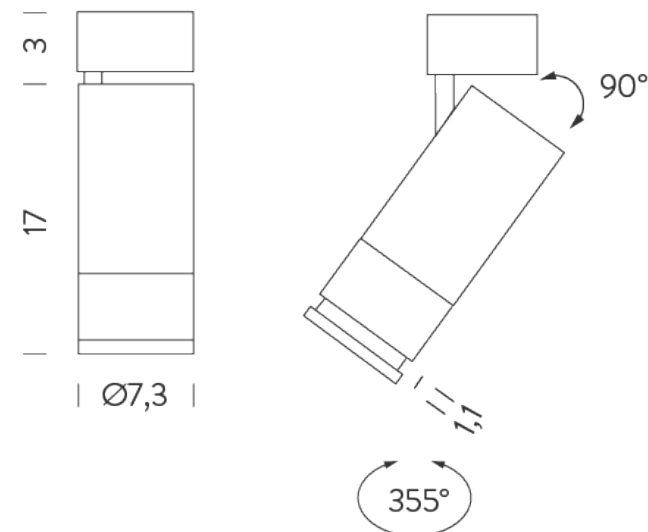

DIMMABLE TRIAC | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	dimmable TRIAC
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x20cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°
Net lamp weight	1 kg

Codes

CAP LW3 41
CAP LN3 41

Structure


white
black

PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

Certificazioni

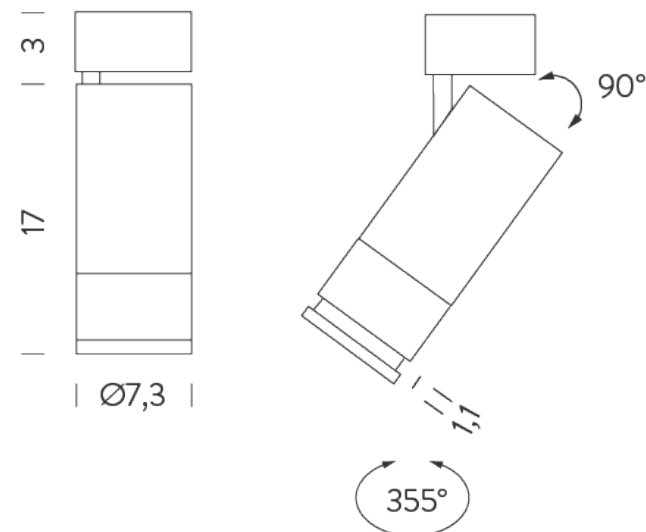

DIMMABLE 0-10V | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	dimnable 0-10V
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x20cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°
Net lamp weight	1 kg

Codes

CAP LW2 42
CAP LN2 42

Structure


white
black

PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

Certificazioni

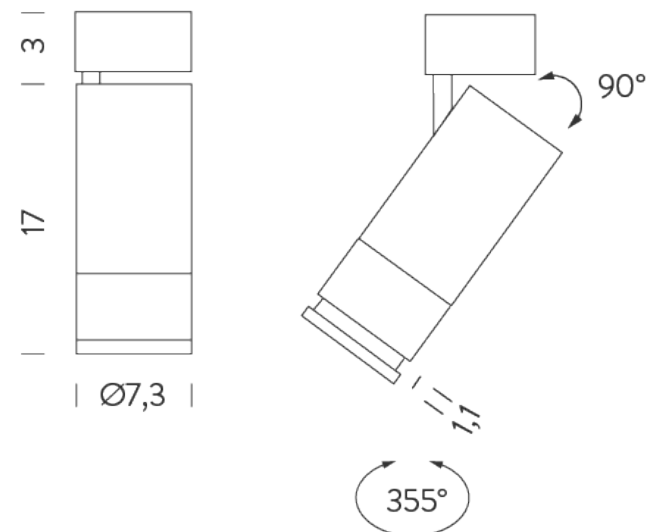

DIMMABLE 0-10V | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	dimmable 0-10V
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x20cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°
Net lamp weight	1 kg

Codes

CAP LW3 42
CAP LN3 42

Structure


white
black

PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

Certificazioni

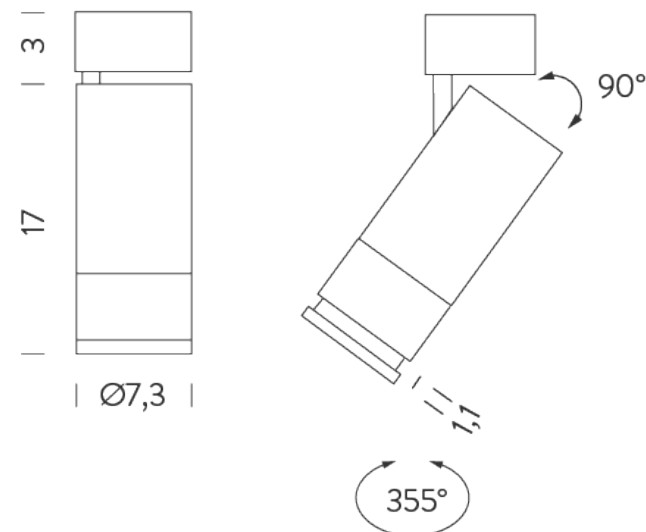

DIMMABLE DALI | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	dimmable DALI
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x20cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°
Net lamp weight	1 kg

Codes

CAP LW2 43
CAP LN2 43

Structure


white
black

PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

Certificazioni

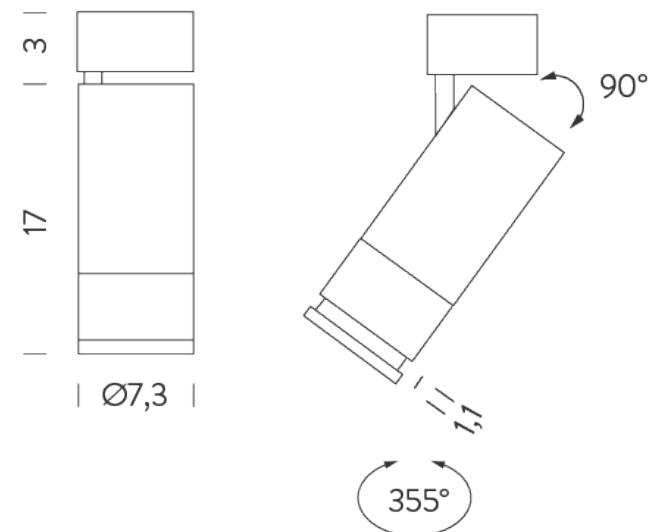

DIMMABLE DALI | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	dimmable DALI
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x20cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°
Net lamp weight	1 kg

Codes

CAP LW3 43
CAP LN3 43

Structure


white
black

PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

Certificazioni

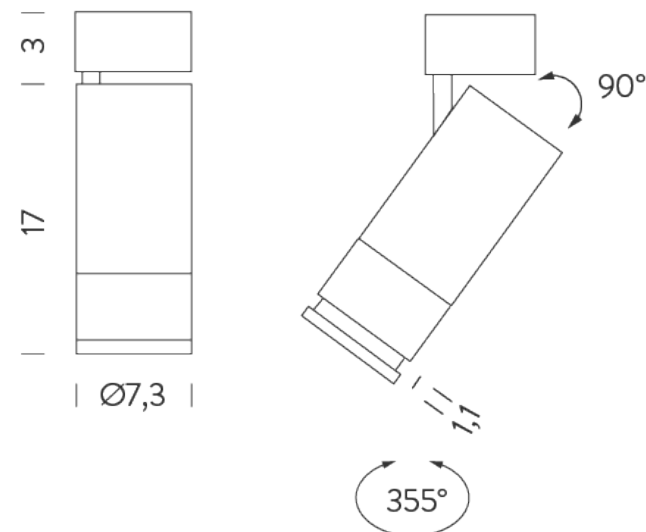

CASAMBI (BLUETOOTH) | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	CASAMBI (bluetooth)
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x20cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°
Net lamp weight	1 kg

Codes

CAP LN2 45
CAP LW2 45

Structure


black
white

PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

Certificazioni

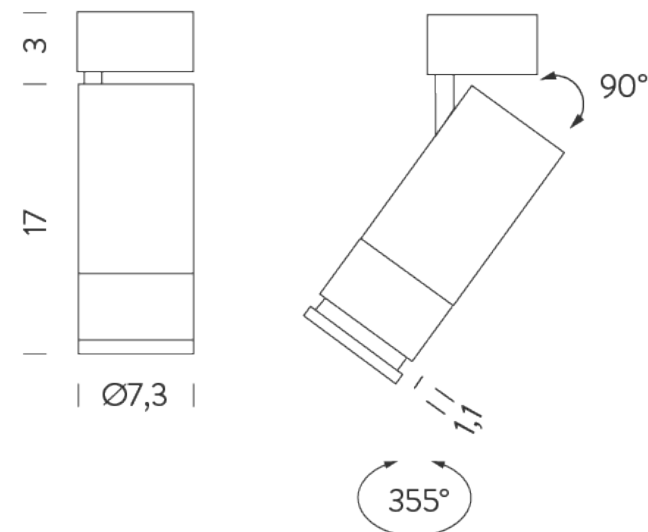

CASAMBI (BLUETOOTH) | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	CASAMBI (bluetooth)
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x20cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°
Net lamp weight	1 kg

Codes

CAP LN3 45
CAP LW3 45

Structure

black
white

PACKAGE

Package 01 Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

Certificazioni

