


ZIRKOL GAP

Nata da una sezione di Zirkol Circle, Zirkol Gap è una proposta, dedicata all'illuminazione generale e decorativa di ambienti. Corpo in alluminio anodizzato e schermo di protezione opale per un'illuminazione downlight e uplight omogenea. Zirkol Gap è proposta nelle finiture black, white e matte gold e nelle temperature colore LED 2700K, 3000K e 4000K. Driver remoto e dimmer interface inclusi.

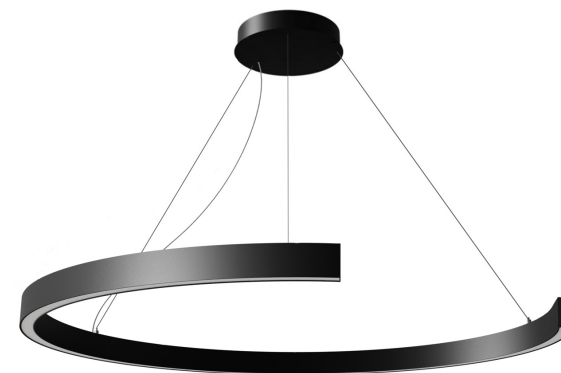

Ø0,85M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	1500lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1608G15DBO
BZRG1608G15DNE
BZRG1608G15DOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni

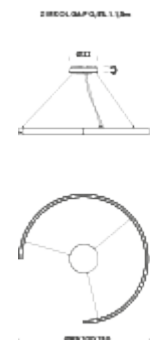

Ø0,85M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	1650lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1608G15WBO
BZRG1608G15WNE
BZRG1608G15WOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni

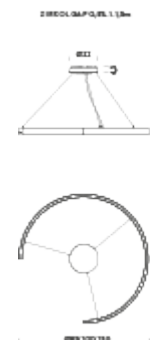

Ø0,85M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	1770lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1608G15NBO
BZRG1608G15NNE
BZRG1608G15NOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni

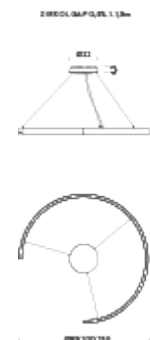

Ø0,85M | UP-DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	3000lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1708G15DBO
BZRG1708G15DNE
BZRG1708G15DOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni

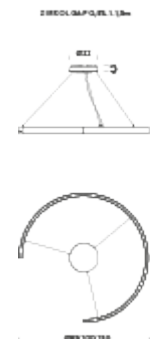

Ø0,85M | UP-DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	3300lm
Initial luminaire efficacy	73lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1708G15WBO
BZRG1708G15WNE
BZRG1708G15WOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni

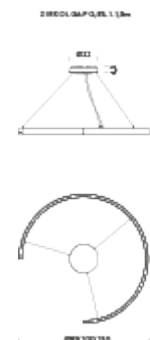

Ø0,85M | UP-DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	3540lm
Initial luminaire efficacy	79lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1708G15NBO
BZRG1708G15NNE
BZRG1708G15NOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni

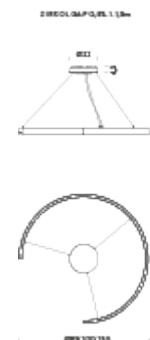

Ø1M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	1962lm
Initial luminaire efficacy	75lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1610G15DBO
BZRG1610G15DNE
BZRG1610G15DOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni

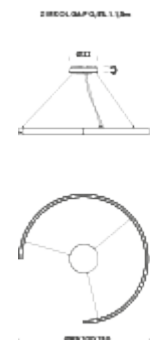

Ø1M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	2077lm
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1610G15WBO
BZRG1610G15WNE
BZRG1610G15WOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni

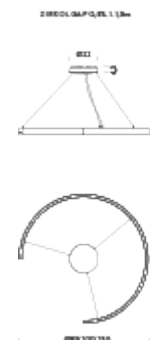

Ø1M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	2308lm
Initial luminaire efficacy	89lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1610G15NBO
BZRG1610G15NNE
BZRG1610G15NOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni

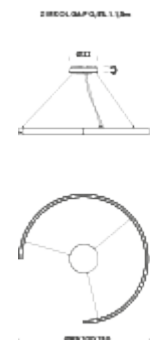

Ø1M | UP-DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	68W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	3923lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

4 kg

Codes

BZRG1710G15DBO
BZRG1710G15DNE
BZRG1710G15DOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

Certificazioni

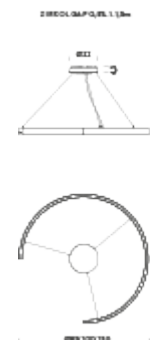

Ø1M | UP-DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	68W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	4154lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

4 kg

Codes

BZRG1710G15WBO
BZRG1710G15WNE
BZRG1710G15WOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

Certificazioni

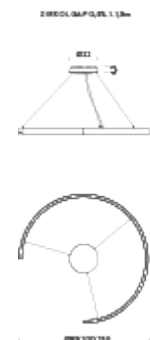

Ø1M | UP-DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	68W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	4615lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

4 kg

Codes

BZRG1710G15NBO
BZRG1710G15NNE
BZRG1710G15NOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

Certificazioni

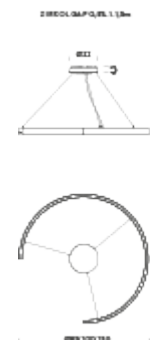

Ø1,5M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	50W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	2942lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø150x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems



Codes

BZRG1615G15DBO
BZRG1615G15DNE
BZRG1615G15DOR

Structure

white
black
gold

Certificazioni

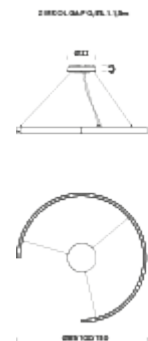

Ø1,5M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	50W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	3115lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø150x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

external electrical cable | light configurations, separate light control, control systems



Codes

BZRG1615G15WBO
BZRG1615G15WNE
BZRG1615G15WOR

Structure

white
black
gold

Certificazioni

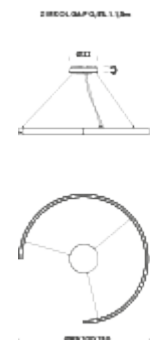

Ø1,5M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	50W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	3462lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø150x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

external electrical cable | light configurations, separate light control, control systems



Codes

BZRG1615G15NBO
BZRG1615G15NNE
BZRG1615G15NOR

Structure

white
black
gold

Certificazioni

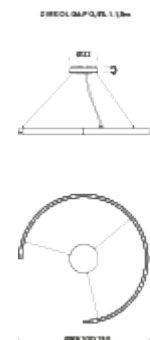

Ø1,5M | UP-DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	100W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	5885lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø150x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 100W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems



Codes

BZRG1715G15DBO
BZRG1715G15DNE
BZRG1715G15DOR

Structure

white
black
gold

Certificazioni



Ø1,5M | UP-DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	100W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	6231lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø150x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options

included: round canopy with 1 x driver 100W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

external electrical cable | light configurations, separate light control, control systems



Codes

BZRG1715G15WBO
BZRG1715G15WNE
BZRG1715G15WOR

Structure

white
black
gold

Certificazioni

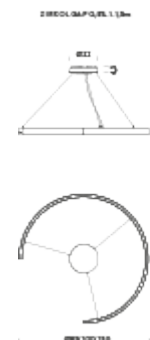

Ø1,5M | UP-DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	100W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	6924lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø150x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options

included: round canopy with 1 x driver 100W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

external electrical cable | light configurations, separate light control, control systems

Codes

BZRG1715G15NBO
BZRG1715G15NNE
BZRG1715G15NOR

Structure

white
black
gold

Certificazioni

