

# MINIFLUX LINEA TRASPAREN

Miniflux Linea Transparent è un sistema a LED a sospensione destinato all'illuminazione in interni. Corpo in profilato in alluminio su cui è posizionata una striscia di Nastro LED 24V DC. CRI>97. Diffusore in policarbonato trasparente. È proposto con finitura black, white e gold. Miniflux è disponibile in due temperature colore e nelle versioni TRIAC e DALI. Alimentatore remoto incluso.



## TRIAC | 2700K

### LAMPING

Source	LED strip
Total power	15W
Emission	direct
Switching	TRIAC
Tension	24V
Color temperature	2700K
Luminous flux	852lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
Energy class	F
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	

Customization options  
Net lamp weight

included: canopy with 1 x driver | 1 x electrical cable 3m | 2 x adjustable metal cables 2m | driver included | canopy RAL 9005 black for black finish | canopy RAL 9016 white for white/gold finish  
tube length  
0,6 kg

### Codes

BMLT2710G26DAN  
BMLT2710G26DBO  
BMLT2710G26DAO

### Structure


black  
white  
gold

### PACKAGE

Package 01

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

### Certificazioni

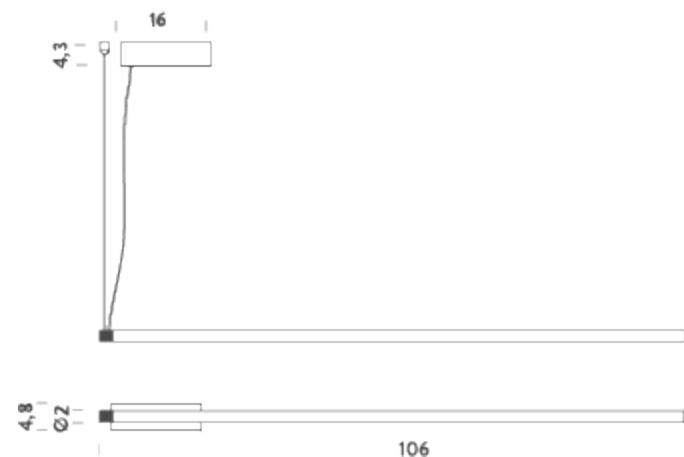

## TRIAC | 3000K

### LAMPING

Source	LED strip
Total power	15W
Emission	direct
Switching	TRIAC
Tension	24V
Color temperature	3000K
Luminous flux	897lm
Initial luminaire efficacy	60m/W
Initial chromaticity	SDCM<3
Typ CRI	>97
Energy class	F
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	

Customization options  
Net lamp weight

included: canopy with 1 x driver | 1 x electrical cable 3m | 2 x adjustable metal cables 2m | driver included | canopy RAL 9005 black for black finish | canopy RAL 9016 white for white/gold finish  
tube length  
0,6 kg

### Codes

BMLT2710G26WAN  
BMLT2710G26WBO  
BMLT2710G26WAO

### Structure


black  
white  
gold

### PACKAGE

Package 01

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

### Certificazioni

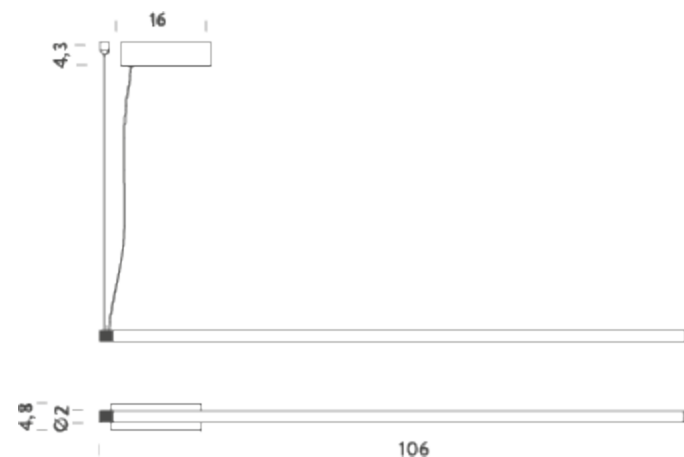

## DALI | 2700K

### LAMPING

Source	Linear LED
Total power	15W
Emission	direct
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	852lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
Energy class	F
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	

Customization options  
Net lamp weight

included: canopy with 1 x driver | 1 x electrical cable 3m | 2 x adjustable metal cables 2m | driver included | canopy RAL 9005 black for black finish | canopy RAL 9016 white for white/gold finish  
tube length  
0,6 kg

### Codes

BMLT1610G26DAN  
BMLT1610G26DBO  
BMLT1610G26DAO

### Structure


black  
white  
gold

### PACKAGE

Package 01

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

### Certificazioni

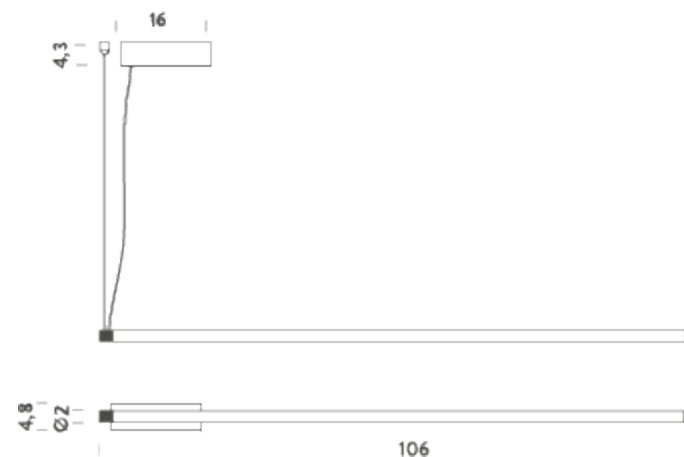

## DALI | 3000K

### LAMPING

Source	LED strip
Total power	15W
Emission	direct
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	897lm
Initial luminaire efficacy	60m/W
Initial chromaticity	SDCM<3
Typ CRI	>97
Energy class	F
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	

Customization options  
Net lamp weight

included: canopy with 1 x driver | 1 x electrical cable 3m | 2 x adjustable metal cables 2m | driver included | canopy RAL 9005 black for black finish | canopy RAL 9016 white for white/gold finish  
tube length  
0,6 kg

### Codes

BMLT1610G26WAN  
BMLT1610G26WBO  
BMLT1610G26WAO

### Structure

black  
white  
gold

### PACKAGE

Package 01

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

### Certificazioni

