

Bernhard Osann

GAMMA

Gamma trova la sua perfetta applicazione in tutti gli ambienti in cui sia necessaria un'illuminazione downlight UGR<19 e opale uplight. Dal design essenziale e lineare, con la sorgente luminosa che percorre l'intera lunghezza del braccio lampada, è dotata di dimmable push botton per la gestione separata della luce diretta e indiretta. Proposta con finitura nera, è disponibile con due temperature colore LED.



3000K | DIMMER ON BOARD

LAMPING

Source	LED strip
Total power	55W
Emission	downlight UGR<19 / opal uplight
Switching	dimmer on board
Tension	220/240V
Color temperature	3000K
Luminous flux	3800lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	25x132,4x220cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	UGR<19 separate control dimmable push button RAL 9005 black driver included
Net lamp weight	10,6 kg


Codes
MGAM35A1/49WNE

PACKAGE
Package 01
Dimension: 230x35x18 cm / Gross weight: 14,6 kg

Certificazioni



Structure
black

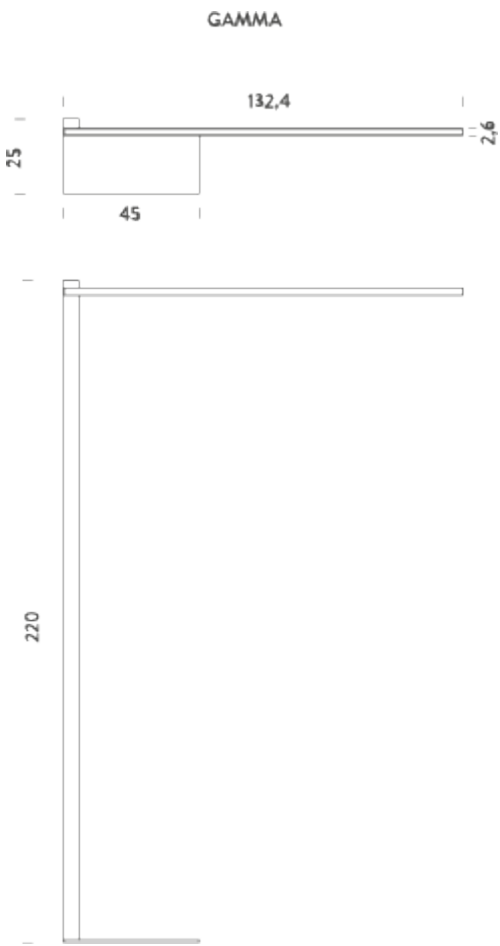

3000K | DIMMER ON BOARD + CASAMBI

LAMPING

Source	LED strip
Total power	55W
Emission	downlight UGR<19 / opal uplight
Switching	dimmer on board + Casambi
Tension	220/240V
Color temperature	3000K
Luminous flux	3800lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	25x132,4x220cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	UGR<19 separate control dimmable push button RAL 9005 black driver included
Net lamp weight	10,6 kg

Codes

MGAM3CA1/49WNE


Structure

black

PACKAGE

Package 01 Dimension: 230x35x18 cm / Gross weight: 14,6 kg

Certificazioni

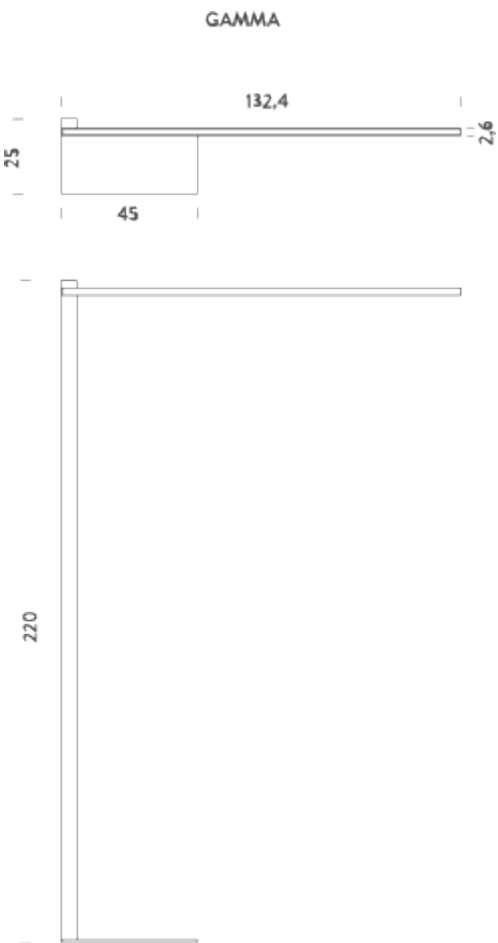

4000K | DIMMER ON BOARD

LAMPING

Source	LED strip
Total power	55W
Emission	downlight UGR<19 / opal uplight
Switching	dimmer on board
Tension	220/240V
Color temperature	4000K
Luminous flux	4000lm
Initial luminaire efficacy	73lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	25x132,4x220cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	UGR<19 separate control dimmable push button RAL 9005 black driver included
Net lamp weight	10,6 kg

Codes

MGAM35A1I49NNE


Structure

black

PACKAGE

Package 01 Dimension: 230x35x18 cm / Gross weight: 14,6 kg

Certificazioni

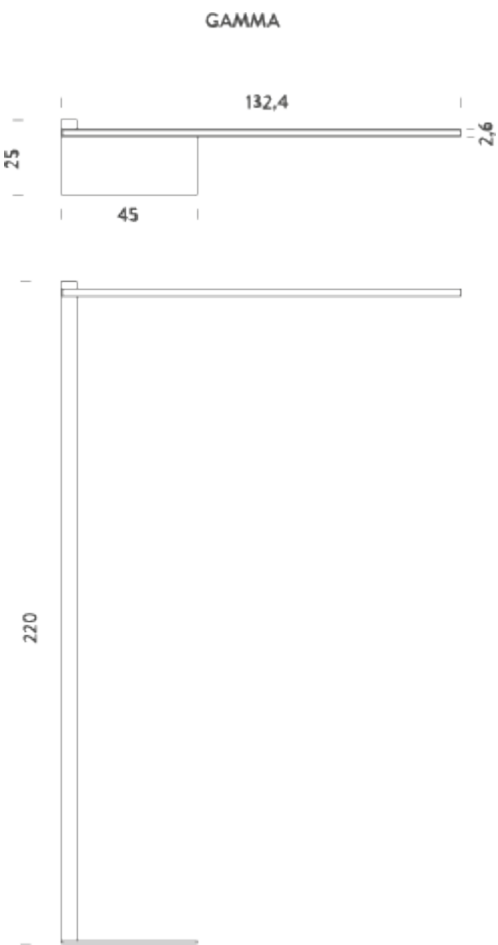

4000K | DIMMER ON BOARD + CASAMBI

LAMPING

Source	LED strip
Total power	55W
Emission	downlight UGR<19 / opal uplight
Switching	dimmer on board + Casambi
Tension	220/240V
Color temperature	4000K
Luminous flux	4000lm
Initial luminaire efficacy	73lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	25x132,4x220cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	UGR<19 separate control dimmable push button RAL 9005 black driver included
Net lamp weight	10,6 kg

Codes

MGAM3CA1/49NNE

Structure

black

PACKAGE

Package 01 Dimension: 230x35x18 cm / Gross weight: 14,6 kg

Certificazioni

