


SLACKLINE IP67

La famiglia slackline si completa con la versione IP67 dedicata ad un'illuminazione d'accento e di segnalazione in esterni. Caratterizzata da un design essenziale e dalla resinatura opale del nastro LED che garantisce il grado IP indicato, è proposta in differenti lunghezze e con due temperature colore. Slackline IP67 rappresenta il prodotto ideale per realizzare soluzioni in linea continua, a fronte di specifiche necessità di progetto in esterni o in ambienti che richiedono un grado di protezione più elevato. Il fissaggio a soffitto avviene tramite staffette incluse.

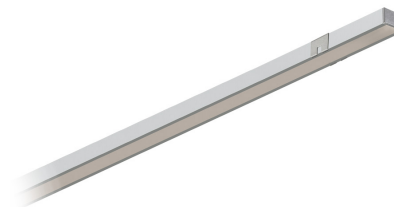

1M | 3000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	457lm
Initial luminaire efficacy	30lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	101x2,3x1,5cm
Materials	aluminium
Performance ambient temperature	25°C
Notes	driver not included cable length 0,5m
Customization options	CCT 2700K, body length recessed, suspended, wall version

Codes

BSLAS810G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm

Certificazioni



SLACKLINE IP67

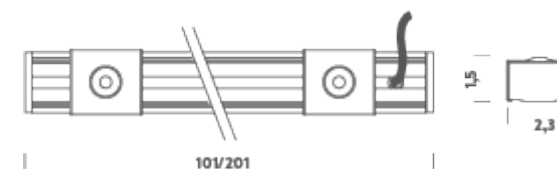

1M | 4000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	540lm
Initial luminaire efficacy	36lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	101x2,3x1,5cm
Materials	aluminium
Performance ambient temperature	25°C
Notes	driver not included cable length 0,5m
Customization options	CCT 2700K, body length recessed, suspended, wall version

Codes

BSLAS810G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm

Certificazioni



SLACKLINE IP67

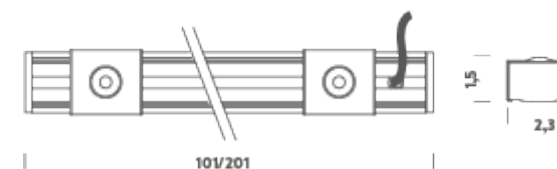

2M | 3000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	914lm
Initial luminaire efficacy	30lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	201x2,3x1,5cm
Materials	aluminium
Performance ambient temperature	25°C
Notes	driver not included cable length 0,5m
Customization options	CCT 2700K, body length recessed, suspended, wall version

Codes

BSLAS820G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm

Certificazioni



SLACKLINE IP67

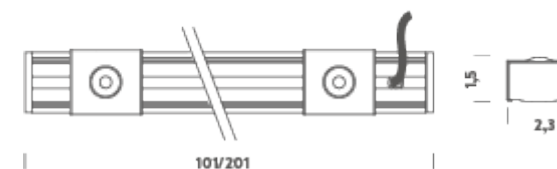

2M | 4000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1080lm
Initial luminaire efficacy	36lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	201x2,3x1,5cm
Materials	aluminium
Performance ambient temperature	25°C
Notes	driver not included cable length 0,5m
Customization options	CCT 2700K, body length recessed, suspended, wall version

Codes

BSLAS820G26NAA

Structure

grey

PACKAGE

Package 01

Dimension: 205x11x2,5 cm

Certificazioni



SLACKLINE IP67

