



LINEAR SYSTEMS indoor

SLACKLINE CEILING

SLACKLINE family is composed of a wide selection of aluminium profiles with different fixing types but with the same LED source. These characteristics make the Slackline installation very flexible in any ambience. Minimal design and excellent light quality. Slackline is also suitable for linear connection solutions (on request). Depending on fixing types, the Slackline comes in various different standard lengths with CRI>94.

La famiglia SLACKLINE è composta da un'ampia selezione di profili in alluminio con diversi tipi di fissaggio, con la stessa sorgente LED. Queste caratteristiche rendono l'installazione della Slackline molto flessibile in qualsiasi ambiente. Design minimalista ed eccellente qualità della luce. Slackline è anche adatta a soluzioni di connessione lineare (su richiesta). A seconda del tipo di fissaggio, Slackline è disponibile in diverse lunghezze standard con CRI>94.

INFORMAZIONI GENERALI GENERAL INFORMATION

Numero di sorgenti Number of light source	240led/m
Tipo di ottica Optic type (beam angle)	140°
Temperatura colore iniziale Initial Color Temperature	3000K/4000K
Indice di resa cromatica Color Rendering Index	>97(3000K)/>94(4000K)
Tipo di ottica Optic type	schermo opale opal screen
Trasformatore incluso Driver included	NO
Colore sorgente luminosa Light source color	white
Classe di protezione IEC IEC Protection class	III
Colore/finitura apparecchio Luminaire color/finish	PC/alluminio PC/aluminium
Montaggio Mounting	plafone/surface mounted (clips included)
Connessione Connections	wires
Cavo Cable	0,5m
Orientabile Adjustable	NO
Dimensioni Dimensions	22,5x13, x max3002mm
Peso netto (pezzo) Net weight (piece)	0,45Kg (1m)

FUNZIONAMENTO E PARTE ELETTRICA OPERATING AND ELECTRICAL

Tensione/corrente di ingresso Input voltage/current	24VDC
Frequenza di ingresso Input frequency	/

CONTROLLI E REGOLAZIONE DEL FLUSSO CONTROL AND DIMMING

Dimmerabile Dimmable	YES
Controlli compatibili Compatible controls	1-10/DALI/DMX/CASAMBI

RENDIMENTO INIZIALE INITIAL PERFORMANCE

Flusso luminoso iniziale Initial luminous flux (system flux)	860 lm/m (3000K)
Tolleranza Flusso luminoso Luminous flux tolerance	+/- 10%
Efficienza iniziale apparecchio LED Initial LED luminaire efficacy	57 lm/W
Cromaticità iniziale Initial chromaticity	SDCM<3
Potenza di ingresso iniziale Initial input power	max 15 W/m
Tolleranza consumo energetico Power consumption tolerance	+/- 10%

CONDIZIONI DI APPLICAZIONE APPLICATION CONDITION

Intervallo temperatura ambiente Ambient temperature range	-20°C / 35°C
Performance ambient temperature Performance ambient temperature	25°C

APPROVAZIONE E APPLICAZIONE APPROVAL AND APPLICATION

Grado di protezione Ingress protection code	IP40
Codice protezione impatti meccanici Mechanical impact protection code	/

RENDIMENTO NEL TEMPO OVER TIME PERFORMANCE

Lumen maintenance at median useful life* 50000 h Lumen maintenance at median useful life* 50000 h	L80B50
--	--------

REMARKS


- A richiesta: 2700K/RGB/Tunable White/IP67/lunghezze differenti/etc...
- At request: 2700K/RGB/Tunable White/IP67/different lengths/etc...

- Per applicazioni in linea continua contattare ILTI LUCE
- For in-line applications please contact ILTI LUCE




DISEGNO TECNICO
DIMENSIONAL DRAWINGS

Dimensioni (mm)
Dimensions (mm)

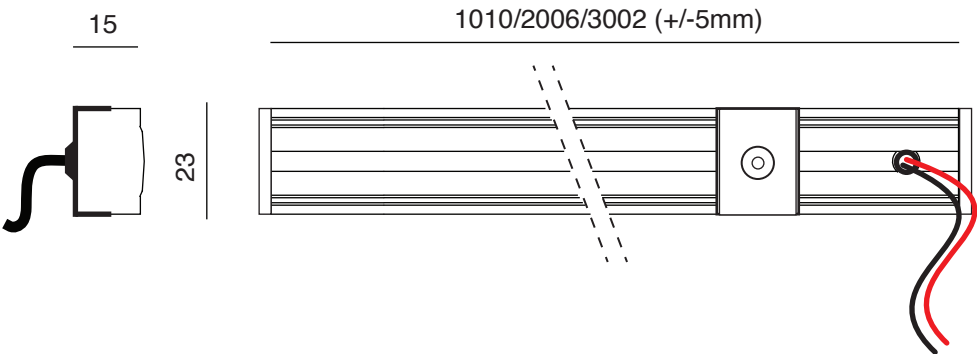

ACCESSORI
ACCESSORIES

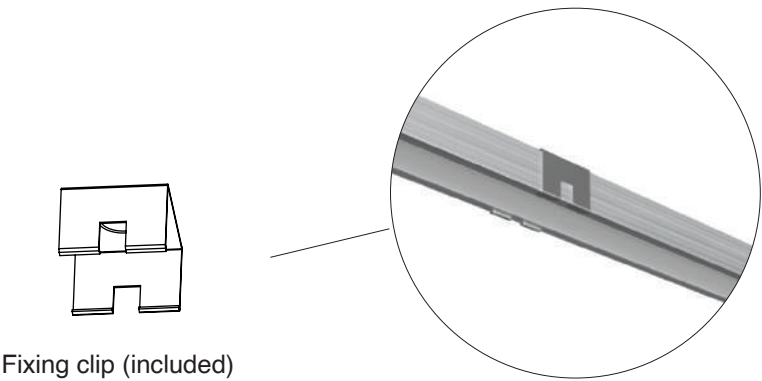

Fixing clip (included)

CUSTOMIZATIONS:

- CCT 2700K
- Body lenght
- Black finish

CODICI
CODES

PRODUCTS CODE	DESCRIPTION	FINISH	CT	DIMMING
BSLA0410G26NAA	Slackline gen.2 NW L=1m sur.15W-IN24VDC	White	4000K	YES (not included)
BSLA0410G26WAA	Slackline gen.2 WW L=1m sur.15W-IN24VDC	Black	3000K	YES (not included)
BSLA0420G26NAA	Slackline gen.2 NW L=2m sur.30W-IN24VDC	White	4000K	YES (not included)
BSLA0420G26WAA	Slackline gen.2 WW L=2m sur.30W-IN24VDC	Black	3000K	YES (not included)
BSLA0430G26NAA	Slackline gen.2 NW L=3m sur.45W-IN24VDC	White	4000K	YES (not included)
BSLA0430G26WAA	Slackline gen.2 WW L=3m sur.45W-IN24VDC	Black	3000K	YES (not included)