

SLACKLINE TRIM NW 1m

Installation :

Project number :

Customer :

Processed by :

Date : 19.03.2020

The following values are based on precise calculations performed on calibrated lamps and luminaires, and their configurations, whereby gradual, unavoidable deviations can occur in practice. All guarantee claims are excluded for the specified data.

This exclusion of liability applies irrespective of the legal grounds for both damages and consequential damages suffered by users and third parties.

Object : SLACKLINE TRIM NW 1m
Installation :
Project number :
Date : 19.03.2020

1 Luminaire data

1.1 NEMO Studio, SLACKLINE TRIM 1m NW (BSLA0110G26NAA)

1.1.1 Data sheet

Manufacturer: NEMO Studio

BSLA0110G26NAA SLACKLINE TRIM 1m NW


Luminaire data

Luminaire efficacy : 44.13 lm/W
Classification : A40 ↓99.9% ↑0.1%
CIE Flux Codes : 44 76 94 100 115
UGR 4H 8H : 25.2 / 27.8
Power : 15 W

Equipped with


Quantity : 1
Designation : Source
Colour : 4140 K
Luminous flux : 662 lm
Colour reproduction : 93

Dimensions : 1005 mm x 32 mm x 20 mm

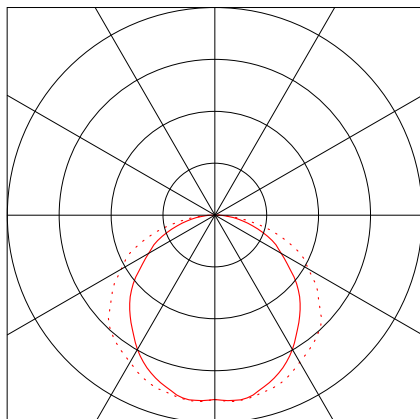

1.1 NEMO Studio, SLACKLINE TRIM 1m NW (BSLA0110G26NAA)

1.1.2 LDC

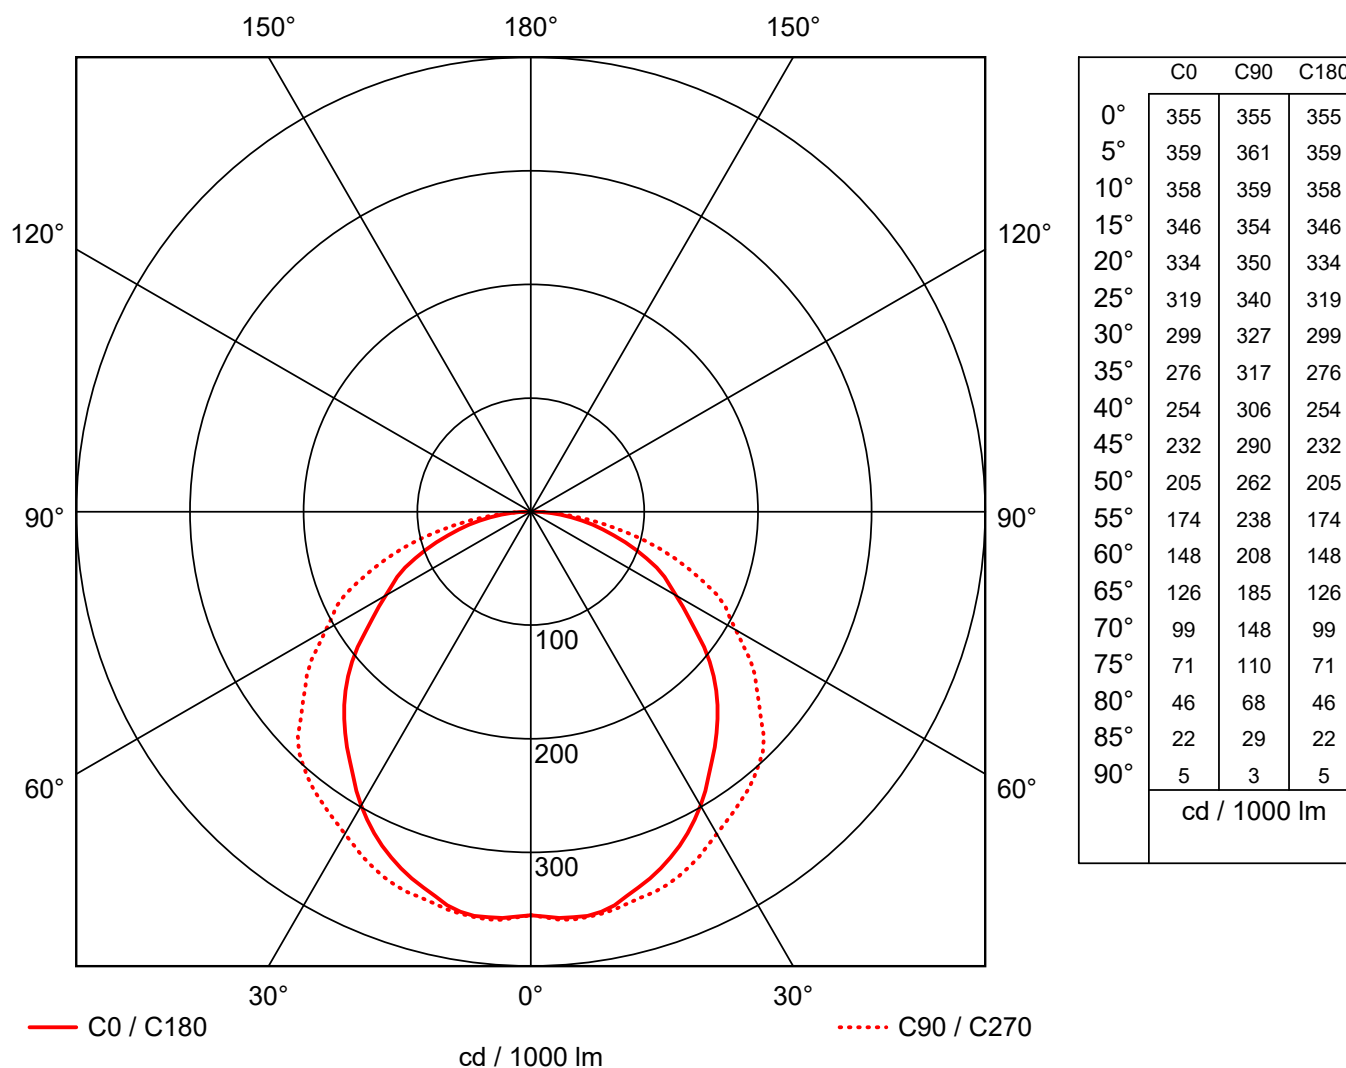


Manufacturer : NEMO Studio
Order number : BSLA0110G26NAA
Luminaire name : SLACKLINE TRIM 1m NW
Equipment : 1 x Source 15 W / 662 lm
Dimensions : L 1005 mm x W 32 mm x H 20 mm
File name : BSLA0110G26NAA.LDT

Luminaire efficacy : 44.13 lm/W (A40)
Light distribution : sym. to C0-C180 / C90-C270
Beam Angle : 107.6° C0-C180
131.0° C90-C270

1.1 NEMO Studio, SLACKLINE TRIM 1m NW (BSLA0110G26NAA)

1.1.3 Cone diagram

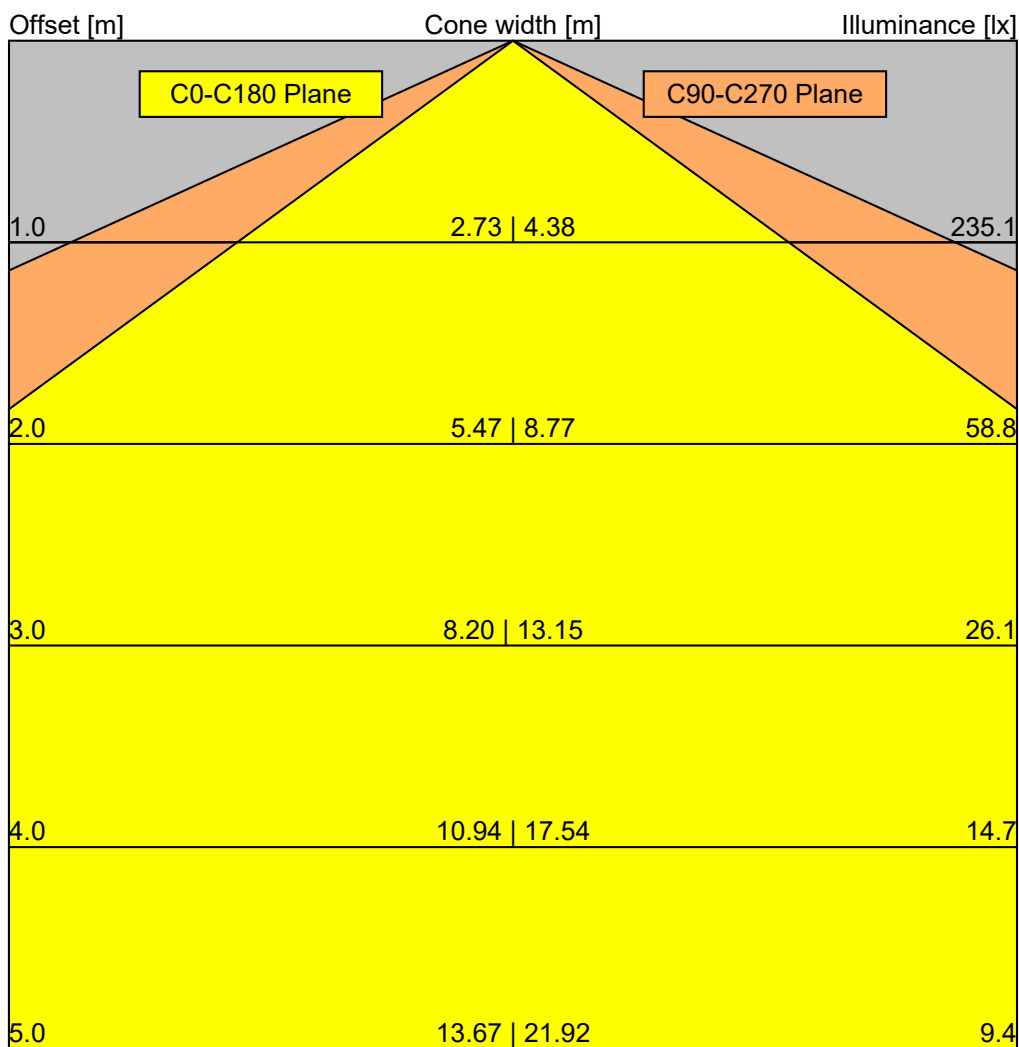

Note: The illuminance is calculated with $I(\gamma=0)!$

Manufacturer	: NEMO Studio	Luminaire efficacy	: 44.13 lm/W (A40)
Order number	: BSLA0110G26NAA	Light distribution	: sym. to C0-C180 / C90-C270
Luminaire name	: SLACKLINE TRIM 1m NW	Beam Angle	: 107.6° C0-C180
Equipment	: 1 x Source 15 W / 662 lm		: 131.0° C90-C270
Dimensions	: L 1005 mm x W 32 mm x H 20 mm		
File name	: BSLA0110G26NAA.LDT		