

ILTI LUCE

THE ZIRKOL COLLECTION indoor

SIDE | 1m

IN&OUT



ZIRKOL SIDE

Zirkol Side è la nuova proposta della collezione, l'unica che permette un'emissione laterale e omogenea della luce. Corpo in alluminio anodizzato e schermo di protezione opale. Zirkol Side è proposta nelle finiture black e white e nelle temperature colore LED 2700K, 3000K e 4000K. Driver remoto e dimmer interface DALI inclusi.

Zirkol Side, new piece of the collection, enables lateral and homogeneous light emission. Anodised aluminium body and opal protection screen. Available in the finishes black and white and in the LED colour temperatures of 2700K, 3000K and 4000K. Remote driver and DALI dimmer interface included.

INFORMAZIONI GENERALI GENERAL INFORMATION	
Numero di sorgenti Number of light source	Inside-outside emission
Tipo di ottica Optic type (beam angle)	diffuse
Temperatura colore iniziale Initial Color Temperature	2700K 3000K 4000K
Indice di resa cromatica Color Rendering Index	CRI>90
Tipo di ottica Optic type	Opal
Trasformatore incluso Driver included	Yes
Colore sorgente luminosa Light source color	White
Classe di protezione IEC IEC Protection class	III
Colore/finitura apparecchio Luminaire color/finish	matt white RAL9016 matt black RAL9005
Montaggio Mounting	Suspension 3 points at 120° Shipped assembled
Connessione Connections	3 adjustable metal cables length 3m
Cavo Cable	1 electrical cable 4m
Orientabile Adjustable	No
Dimensioni Dimensions	Ø1000x50x26,5mm
Peso netto (pezzo) Net weight (piece)	4 Kg

FUNZIONAMENTO E PARTE ELETTRICA OPERATING AND ELECTRICAL

Tensione/corrente di ingresso Input voltage/current	24VDC (SELV)
Frequenza di ingresso Input frequency	/

CONTROLLI E REGOLAZIONE DEL FLUSSO CONTROL AND DIMMING

Dimmerabile Dimmable	DALI/Push/0 -10 V
Controlli compatibili Compatible controls	DMX/RDM, CASAMBI

RENDIMENTO INIZIALE INITIAL PERFORMANCE	2700K	3000K	4000K
Flusso luminoso iniziale Initial luminous flux (system flux)	T.B.V		
Tolleranza Flusso luminoso Luminous flux tolerance	+/- 10%		
Efficienza iniziale apparecchio LED Initial LED luminaire efficacy	T.B.V		
Cromaticità iniziale Initial chromaticity	-	SDCM<3	
Potenza di ingresso iniziale Initial input power	-	max 90W	
Tolleranza consumo energetico Power consumption tolerance	-	+/- 10%	

CONDIZIONI DI APPLICAZIONE APPLICATION CONDITION

Intervallo temperatura ambiente Ambient temperature range	-15°C / 35°C
Performance ambient temperature Performance ambient temperature	20°C

APPROVAZIONE E APPLICAZIONE APPROVAL AND APPLICATION

Grado di protezione Ingress protection code	IP40
Codice protezione impatti meccanici Mechanical impact protection code	/

RENDIMENTO NEL TEMPO OVER TIME PERFORMANCE

Lumen maintenance at median useful life* 50000 h - L80B50


PACKAGING

1x Packaging 1100x1100x110mm




DISEGNO TECNICO
DIMENSIONAL DRAWING

Dimensioni (mm)
Dimension (mm)

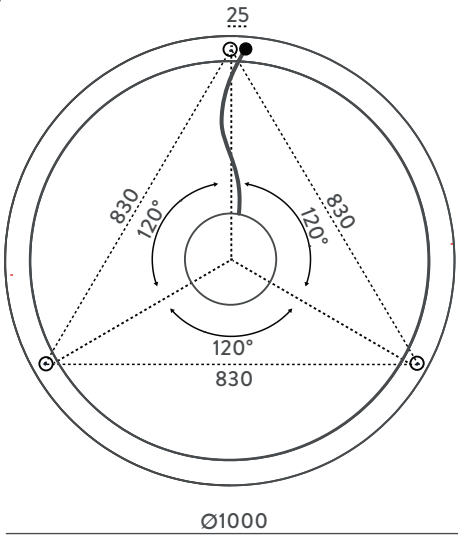


Inside - Outside light

- Electrical cable
- Iron cables

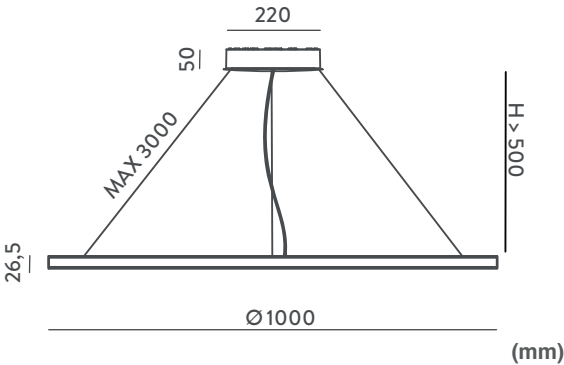


DRIVER & INTERFACES
(included)

IN-100/305VAC OUT-100W24V
● WALIMLED100/24



DALI INTERFACE

IN-12/24VDC OUT-10A
DALI/0-10V/1-10V/PUSH - 1/100%
● WDIMDALIHP



ACCESSORI
ACCESSORIES (Included)

CEILING ATTACHMENT

● BROSMINIST color chrome



CODICI
CODES

PRODUCTS CODE	DESCRIPTION	FINISH	CT	DIMMING
BZRS1710G15DBO	ZIRKOL SIDE B/1M/927/WH/90W/IN24V+PSD	White	2700K	DALI
BZRS1710G15DNE	ZIRKOL SIDE B/1M/927/BK/90W/IN24V+PSD	Black	2700K	DALI
BZRS1710G15WBO	ZIRKOL SIDE B/1M/930/WH/90W/IN24V+PSD	White	300K	DALI
BZRS1710G15WNE	ZIRKOL SIDE B/1M/930/BK/90W/IN24V+PSD	Black	3000K	DALI
BZRS1710G15NBO	ZIRKOL SIDE B/1M/940/WH/90W/IN24V+PSD	White	4000K	DALI
BZRS1710G15NNE	ZIRKOL SIDE B/1M/940/BK/90W/IN24V+PSD	Black	4000K	DALI