




ILTI LUCE





ILTI LUCE

SPOTLIGHT

SPOTLIGHT

CEILING	ELBA CEILING	CAPRI CEILING	FLEX	SALINA CEILING	
					
	p.13	p.15	p.56	p.70	
RECESSED	ALICUDI	SALINA	LIPARI	LUX INDOOR	PATTERN
					
	p.66	p.68	p.72	p.74	p.76
	CUCÙ	POP UP	HEY!		
					
	p.82	p.84	p.85		
FLOOR / TABLE	PLINT				
					
	p.46				

TRACK

TRACK 48V	GRAVITY SPOT	GRAVITY UGR	GRAVITY DASH	GRAVITY TUBE	GRAVITY SPHERE
					
	p.28	p.33	p.34	p.36	p.36
TRACK 230V	ELBA	CAPRI	CAPRI PRO	FANTE	
					
	p.10	p.14	p.16	p.8	



FANTE ELBA CAPRI



FANTE ELBA CAPRI

IT

La gamma racchiude la proposta di spot orientabili con fissaggio a binario, dedicati ad un'illuminazione generale o d'accento in interni: ELBA, CAPRI e il nuovo spot FANTE. Design essenziale ed estetica compatta, grazie alla struttura di dissipazione del calore e il driver integrato. ELBA e CAPRI sono dotati di ottica variabile con zoom on-board per soddisfare qualsiasi esigenza di illuminazione. Orientabili e ruotabili di 90° sull'asse verticale e di 355° sull'asse orizzontale, sono dotati di fascio ottico regolabile per soddisfare qualsiasi esigenza e per garantire una maggiore flessibilità di utilizzo. Sono proposti inoltre anche nella versione ceiling, con fissaggio a plafone. Si aggiunge alla collezione, CAPRI PRO che completandosi di filtri accessori che rispondono ad ogni necessità di illuminazione, è particolarmente adatto agli spazi espositivi. L'eccellente struttura di dissipazione del calore e il driver integrato, sono perfettamente combinati insieme. L'intera collezione è disponibile con finitura bianca e nera. Gli spots sono comprensivi di adattatore compatibile per fissaggio a binario 3-phase (nelle versioni 230V e 230V DALI/1-10V).

EN

The range includes track mounted adjustable spotlights for indoor general or accent lighting: ELBA, CAPRI, and the new FANTE. Essential design, compact aesthetics, and thanks to the heat dissipation structure and integrated driver. ELBA and CAPRI are equipped with variable optics with onboard zoom to meet any lighting requirement. Adjustable and rotatable by 90° on the vertical axis and 355° on the horizontal axis, they are equipped with an adjustable optical beam to ensure greater flexibility of use. Available also in a ceiling mounted version. CAPRI PRO features accessory filters to meet all lighting needs and is particularly suitable for exhibition spaces. The excellent heat dissipation structure and the integrated driver are perfectly combined. The entire collection is available in white and black finish. The spotlights include a compatible adapter for 3-phase track mounting (in 230V and 230V DALI/1-10V versions).

DE

Die Kollektion umfasst verstellbare Strahlschienenstrahler für die Allgemein- oder Akzentbeleuchtung in Innenräumen: ELBA, CAPRI und der neue Strahler FANTE. Das Design ist schlicht und kompakt, dank der Wärmeableitungsstruktur und des integrierten Treibers. ELBA und CAPRI sind mit einer Optik mit Zoomfunktion ausgestattet, um allen Beleuchtungsanforderungen gerecht zu werden. Sie sind um 90° schwenk- und 355° drehbar. Sie sind auch in einer Deckenversion erhältlich. Der CAPRI PRO, der mit verschiedenen Zubehörfiltern ausgestattet ist, um allen Beleuchtungsanforderungen gerecht zu werden, ergänzt die Kollektion und eignet sich besonders für Ausstellungsräume. Die hervorragende Wärmeableitungsstruktur und der integrierte Treiber sind perfekt aufeinander abgestimmt. Die gesamte Kollektion ist in weißer und schwarzer Ausführung erhältlich. Die Strahler werden mit einem kompatiblen Adapter für die Montage an 3-Phasen-Strahlschienen geliefert (in den Versionen 230V und 230V DALI/1-10V).


FR

La gamme comprend la proposition de spots orientables avec fixation sur rail, dédiés à l'éclairage général ou ponctuel des intérieurs : ELBA, CAPRI et le nouveau spot FANTE. Design essentiel et esthétique compacte, grâce à la structure de dissipation thermique et au driver intégré. ELBA et CAPRI sont équipés d'optiques variables avec zoom intégré pour satisfaire tout besoin d'éclairage. Orientables et pivotants à 90° sur l'axe vertical et à 355° sur l'axe horizontal, ils sont équipés d'un faisceau optique réglable pour satisfaire tous les besoins et garantir une plus grande flexibilité d'utilisation. Ils sont également proposés en version plafonnier, avec fixation au plafond. À la collection s'ajoute CAPRI PRO dont les filtres accessoires répondent à chaque besoin d'éclairage, particulièrement adapté aux espaces d'exposition. L'excellente structure de dissipation thermique et le driver intégré sont parfaitement combinés. Toute la collection est disponible en finition noir et blanc. Les spots comprennent un adaptateur compatible pour la fixation sur rail triphasé (dans les versions 230V et 230V DALI/1-10V).



Elba track , black.
Molteni&C Flagship Store, Rome



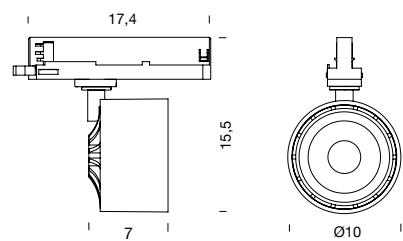

FANTE

voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code
220/240V	20W	1x COB	1710lm	36°	90	ON/OFF	track	2700K	white	MFAN5401757DBO
220/240V	20W	1x COB	1710lm	36°	90	ON/OFF	track	2700K	black	MFAN5401757DNE
220/240V	20W	1x COB	1860lm	36°	90	ON/OFF	track	3000K	white	MFAN5401757WBO
220/240V	20W	1x COB	1860lm	36°	90	ON/OFF	track	3000K	black	MFAN5401757WNE
220/240V	28W	1x COB	2860lm	36°	90	ON/OFF	track	2700K	white	MFAN5401756DBO
220/240V	28W	1x COB	2860lm	36°	90	ON/OFF	track	2700K	black	MFAN5401756DNE
220/240V	28W	1x COB	3060lm	36°	90	ON/OFF	track	3000K	white	MFAN5401756WBO
220/240V	28W	1x COB	3060lm	36°	90	ON/OFF	track	3000K	black	MFAN5401756WNE
220/240V	28W	1x COB	2860lm	36°	90	dimmable DALI	track	2700K	white	MFAN5701756DBO
220/240V	28W	1x COB	2860lm	36°	90	dimmable DALI	track	2700K	black	MFAN5701756DNE
220/240V	28W	1x COB	3060lm	36°	90	dimmable DALI	track	3000K	white	MFAN5701756WBO
220/240V	28W	1x COB	3060lm	36°	90	dimmable DALI	track	3000K	black	MFAN5701756WNE
note driver on board, beam 15° on demand, rotating body, orientable spot 90°, compatible with TRACK 3C/DALI p.18-19										


CE UK CA IP20



matte white finish



matte black finish



ELBA

current	max power	source	flux (55°)	optic	CRI	switching	mounting	CCT	finish	code
220/240V	13W	1x COB	830lm	15°/55°	90	dimmable TRIAC	track	2700K	white	ELB LW2 81
220/240V	13W	1x COB	830lm	15°/55°	90	dimmable TRIAC	track	2700K	black	ELB LN2 81
220/240V	13W	1x COB	900lm	15°/55°	90	dimmable TRIAC	track	3000K	white	ELB LW3 81
220/240V	13W	1x COB	900lm	15°/55°	90	dimmable TRIAC	track	3000K	black	ELB LN3 81
100/240V	13W	1x COB	830lm	15°/55°	90	dimmable 0-10V	track	2700K	white	ELB LW2 82
100/240V	13W	1x COB	830lm	15°/55°	90	dimmable 0-10V	track	2700K	black	ELB LN2 82
100/240V	13W	1x COB	900lm	15°/55°	90	dimmable 0-10V	track	3000K	white	ELB LW3 82
100/240V	13W	1x COB	900lm	15°/55°	90	dimmable 0-10V	track	3000K	black	ELB LN3 82
note driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with TRACK 3C/0-10V p.18-19										

CE UK IP20



matte black finish



adjustable beam 15°-55°




precise light distribution



Elba Track, white.
Valextra boutique, Beijing



Elba ceiling, black.
Charlie & Friends, Dubai



ELBA CEILING

voltage	max power	source	flux (55°)	optic	CRI	switching	mounting	CCT	finish	code
100/240V	13W	1x COB	830lm	15°/55°	90	dimnable TRIAC	ceiling	2700K	white	ELB LW2 41
100/240V	13W	1x COB	830lm	15°/55°	90	dimnable TRIAC	ceiling	2700K	black	ELB LN2 41
100/240V	13W	1x COB	900lm	15°/55°	90	dimnable TRIAC	ceiling	3000K	white	ELB LW3 41
100/240V	13W	1x COB	900lm	15°/55°	90	dimnable TRIAC	ceiling	3000K	black	ELB LN3 41
100/240V	13W	1x COB	830lm	15°/55°	90	dimnable 0-10V	ceiling	2700K	white	ELB LW2 42
100/240V	13W	1x COB	830lm	15°/55°	90	dimnable 0-10V	ceiling	2700K	black	ELB LN2 42
100/240V	13W	1x COB	900lm	15°/55°	90	dimnable 0-10V	ceiling	3000K	white	ELB LW3 42
100/240V	13W	1x COB	900lm	15°/55°	90	dimnable 0-10V	ceiling	3000K	black	ELB LN3 42
note driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°										

CE UK IP20




matte white finish



matte black finish



orientable spot



CAPRI

voltage	max power	source	flux (55°)	optic	CRI	switching	mounting	CCT	finish	code
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmable triac	track	2700K	white	CAP LW2 81
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmable triac	track	2700K	black	CAP LN2 81
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmable triac	track	3000K	white	CAP LW3 81
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmable triac	track	3000K	black	CAP LN3 81
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmable 0-10V	track	2700K	white	CAP LW2 82
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmable 0-10V	track	2700K	black	CAP LN2 82
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmable 0-10V	track	3000K	white	CAP LW3 82
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmable 0-10V	track	3000K	black	CAP LN3 82
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmable DALI	track	2700K	white	CAP LW2 83
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmable DALI	track	2700K	black	CAP LN2 83
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmable DALI	track	3000K	white	CAP LW3 83
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmable DALI	track	3000K	black	CAP LN3 83
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmer on board	track	2700K	white	CAP LN2 84
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmer on board	track	2700K	black	CAP LN 284
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmer on board	track	3000K	white	CAP LW 384
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmer on board	track	3000K	black	CAP LN 384
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmable casambi	track	2700K	white	CAP LW2 85
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmable casambi	track	2700K	black	CAP LN2 85
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmable casambi	track	3000K	white	CAP LW3 85
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmable casambi	track	3000K	black	CAP LN3 85
note driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V p.18-19										


CE UK PL IP20



matte black finish



precise light distribution



CAPRI CEILING

voltage	max power	source	flux (55°)	optic	CRI	switching	mounting	CCT	finish	code
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmmable triac	ceiling	2700K	white	CAP LW2 41
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmmable triac	ceiling	2700K	black	CAP LN2 41
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmmable triac	ceiling	3000K	white	CAP LW3 41
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmmable triac	ceiling	3000K	black	CAP LN3 41
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmmable 0-10V	ceiling	2700K	white	CAP LW2 42
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmmable 0-10V	ceiling	2700K	black	CAP LN2 42
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmmable 0-10V	ceiling	3000K	white	CAP LW3 42
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmmable 0-10V	ceiling	3000K	black	CAP LN3 42
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmmable DALI	ceiling	2700K	white	CAP LW2 43
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmmable DALI	ceiling	2700K	black	CAP LN2 43
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmmable DALI	ceiling	3000K	white	CAP LW3 43
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmmable DALI	ceiling	3000K	black	CAP LN3 43
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmmable casambi	ceiling	2700K	white	CAP LW2 45
220/240V	23W	1x COB	1600lm	15°/55°	90	dimmmable casambi	ceiling	2700K	black	CAP LN2 45
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmmable casambi	ceiling	3000K	white	CAP LW3 45
220/240V	23W	1x COB	1780lm	15°/55°	90	dimmmable casambi	ceiling	3000K	black	CAP LN3 45
note driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°										


CE UK CA IP20



matte black finish



orientable spot



CAPRI PRO

voltage	max power	source	flux	optic	CRI	switching	CCT	finish	code
220/240V	23W	1x COB	1490lm	15°/55°	>97	DALI	2700K	white	MCAP5701971DBO
220/240V	23W	1x COB	1490lm	15°/55°	>97	DALI	2700K	black	MCAP5701971DNE
220/240V	23W	1x COB	1570lm	15°/55°	>97	DALI	3000K	white	MCAP5701971WBO
220/240V	23W	1x COB	1570lm	15°/55°	>97	DALI	3000K	black	MCAP5701971WNE
220/240V	23W	1x COB	1490lm	15°/55°	>97	dimmer on board	2700K	white	MCAP5901971DBO
220/240V	23W	1x COB	1490lm	15°/55°	>97	dimmer on board	2700K	black	MCAP5901971DNE
220/240V	23W	1x COB	1570lm	15°/55°	>97	dimmer on board	3000K	white	MCAP5901971WBO
220/240V	23W	1x COB	1570lm	15°/55°	>97	dimmer on board	3000K	black	MCAP5901971WNE
note driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V p.18-19									

CE UK CA IP20

ACCESSORIES
ANTI GLARE EFFECT



snoot filter



barndoor filter




honeycomb filter

LIGHT FILTER



oval filter



sanded glass filter








ACCESSORIES

version	finish	dimensions cm	code
snoot	black	Ø7,5x9,2	MCAPSNOOT01
barndoor	black	8x9,5x9,2	MCAPBD01
honeycomb	black	Ø6,2x0,3	MCAPHC62
oval	black	Ø6,2x0,3	MCAPOF62
sanded glass	black	Ø6,2x0,3	MCAPSG62

CEILING/PENDANT



RECESSED




TRACK 3C-230V



version	voltage	switching	mounting	finish	code
1m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	ceiling, pendant	white	MTRK0110BI
1m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	ceiling, pendant	black	MTRK0110NE
2m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	ceiling, pendant	white	MTRK0120BI
2m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	ceiling, pendant	black	MTRK0120NE
3m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	ceiling, pendant	white	MTRK0130BI
3m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	ceiling, pendant	black	MTRK0130NE
1m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	recessed	white	MTRK0310BI
1m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	recessed	black	MTRK0310NE
2m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	recessed	white	MTRK0320BI
2m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	recessed	black	MTRK0320NE
3m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	recessed	white	MTRK0330BI
3m	230V	ON/OFF / TRIAC / CASAMBI / DIMMER ON BOARD	recessed	black	MTRK0330NE

CE UK IP20

CEILING/PENDANT



RECESSED



TRACK -230V DALI/1-10V

version	voltage	switching	mounting	finish	code
1m	230V	DALI / 1-10V	ceiling, pendant	white	MTRK0210BI
1m	230V	DALI / 1-10V	ceiling, pendant	black	MTRK0210NE
2m	230V	DALI / 1-10V	ceiling, pendant	white	MTRK0220BI
2m	230V	DALI / 1-10V	ceiling, pendant	black	MTRK0220NE
3m	230V	DALI / 1-10V	ceiling, pendant	white	MTRK0230BI
3m	230V	DALI / 1-10V	ceiling, pendant	black	MTRK0230NE
1m	230V	DALI / 1-10V	recessed	white	MTRK0410BI
1m	230V	DALI / 1-10V	recessed	black	MTRK0410NE
2m	230V	DALI / 1-10V	recessed	white	MTRK0420BI
2m	230V	DALI / 1-10V	recessed	black	MTRK0420NE
3m	230V	DALI / 1-10V	recessed	white	MTRK0430BI
3m	230V	DALI / 1-10V	recessed	black	MTRK0430NE


CE UK IP20



Track ceiling/pendant, black



Track ceiling/pendant, white




Track recessed, black



Track recessed, white

TRACK 3C-230V ACCESSORY





version	voltage	switching	mounting	finish	code
Track Start DX	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKADX0BBI
Track Start DX	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKADX0BNE
Track Start SX	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKASX0BBI
Track Start SX	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKASX0BNE
Straight Coupler	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKJL0BBI
Straight Coupler	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKJL0BNE
Flexible Coupler	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKJF0BBI
Flexible Coupler	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKJF0BNE
Track End	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKEND00BI
Track End	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKEND00NE
Cover plate	230V	ON/OFF / TRIAC /CASAMBI /DOB	recessed	white	MTRKCOVBBI
Cover plate	230V	ON/OFF / TRIAC /CASAMBI /DOB	recessed	black	MTRKCOVBNE
Cover plate cross	230V	ON/OFF / TRIAC /CASAMBI /DOB	recessed	white	MTRKCOVXBBI
Cover plate cross	230V	ON/OFF / TRIAC /CASAMBI /DOB	recessed	black	MTRKCOVXBNE
Middle feed	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKAC0BBI
Middle feed	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKAC0BNE
L feed right	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKLDX0BBI
L feed right	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKLDX0BNE
L feed left	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKLSX0BBI
L feed left	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKLSX0BNE
T Feed right up	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKTD0BBI
T Feed right up	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKTD0BNE
T Feed right down	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKTD0BBI
T Feed right down	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKTD0BNE
T Feed left up	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKTS0BBI
T Feed left up	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKTS0BNE
T Feed left down	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKTS0BBI
T Feed left down	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKTS0BNE
X Feed	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	white	MTRKX0BBI
X Feed	230V	ON/OFF / TRIAC /CASAMBI /DOB	ceiling, pendant, recessed	black	MTRKX0BNE

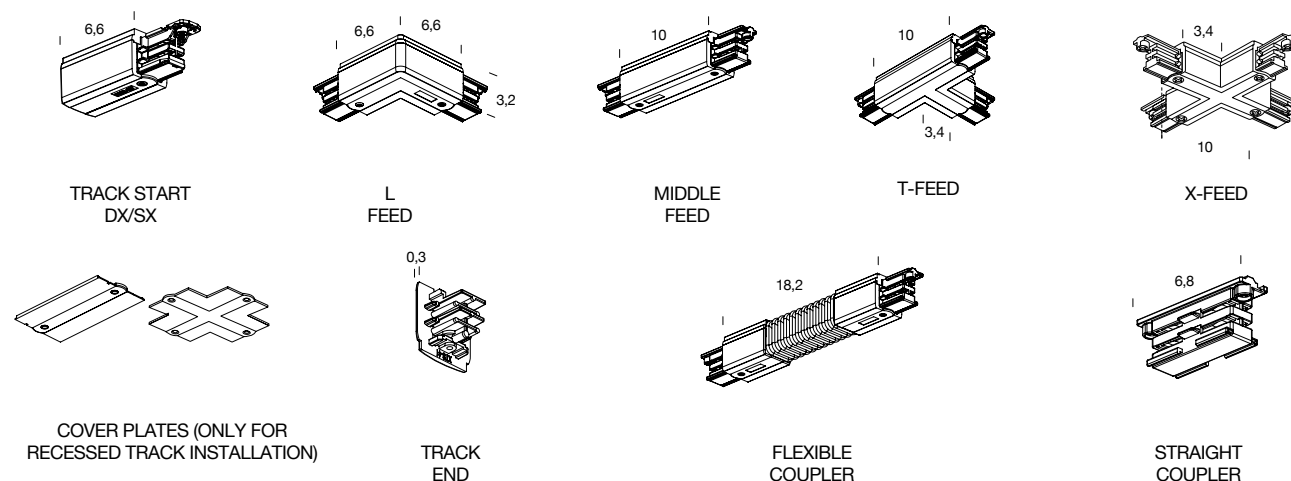3PHASE ACCESSORY (ON/OFF-TRIAC)


TRACK 3C-230V DALI/1-10V ACCESSORY

version	voltage	switching	mounting	finish	code
Track Start DX	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKADX0ABI
Track Start DX	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKADX0ANE
Track Start SX	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKASX0ABI
Track Start SX	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKASX0ANE
Straight Coupler	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKJL0ABI
Straight Coupler	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKJL0ANE
Flexible Coupler	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKJF0ABI
Flexible Coupler	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKJF0ANE
Track end	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKEND00BI
Track end	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKEND00NE
Cover plate	230V	DALI/ 1-10V	recessed	white	MTRKCOVABI
Cover plate	230V	DALI/ 1-10V	recessed	black	MTRKCOVANE
Cover plate cross	230V	DALI/ 1-10V	recessed	white	MTRKCOVXABI
Cover plate cross	230V	DALI/ 1-10V	recessed	black	MTRKCOVXANE
Middle feed	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKAC0ABI
Middle feed	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKAC0ANE
L feed right	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKLDX0ABI
L feed right	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKLDX0ANE
L feed left	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKLSX0ABI
L feed left	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKLSX0ANE
T Feed right up	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKTD0ABI
T Feed right up	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKTD0ANE
T Feed right down	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKTD0ABI
T Feed right down	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKTD0ANE
T Feed left up	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKTS0ABI
T Feed left up	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKTS0ANE
T Feed left down	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKTS0ABI
T Feed left down	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKTS0ANE
X Feed	230V	DALI/ 1-10V	ceiling, pendant, recessed	white	MTRKX0ABI
X Feed	230V	DALI/ 1-10V	ceiling, pendant, recessed	black	MTRKX0ANE





DALI ACCESSORY (DALI/1-10V)

TRACK START
DX/SXL
FEEDMIDDLE
FEED

T-FEED



X-FEED


COVER PLATES (ONLY FOR
RECESSED TRACK
INSTALLATION)TRACK
ENDFLEXIBLE
COUPLERSTRAIGHT
COUPLER

TRACK 3C-230V DALI/1-10V ACCESSORY


version	voltage	switching	mounting	finish	code
Clip	230V	ON/OFF / TRIAC/ DALI/ 1-10V	ceiling, pendant	white	MTRKCL00BI
Clip	230V	ON/OFF / TRIAC/ DALI/ 1-10V	ceiling, pendant	black	MTRKCL00NE
Steel Clable 1,5m	230V	ON/OFF / TRIAC/ DALI/ 1-10V	pendant	white	MTRKCAB0015BI
Steel Clable 1,5m	230V	ON/OFF / TRIAC/ DALI/ 1-10V	pendant	black	MTRKCAB0015NE
Steel Clable 3m	230V	ON/OFF / TRIAC/ DALI/ 1-10V	pendant	white	MTRKCAB0030BI
Steel Clable 3m	230V	ON/OFF / TRIAC/ DALI/ 1-10V	pendant	black	MTRKCAB0030NE
Suspension nut M6	230V	ON/OFF / TRIAC/ DALI/ 1-10V	pendant		MTRKNUT

POLARITY INSTRUCTIONS

ON/OFF-TRIAC EXAMPLE

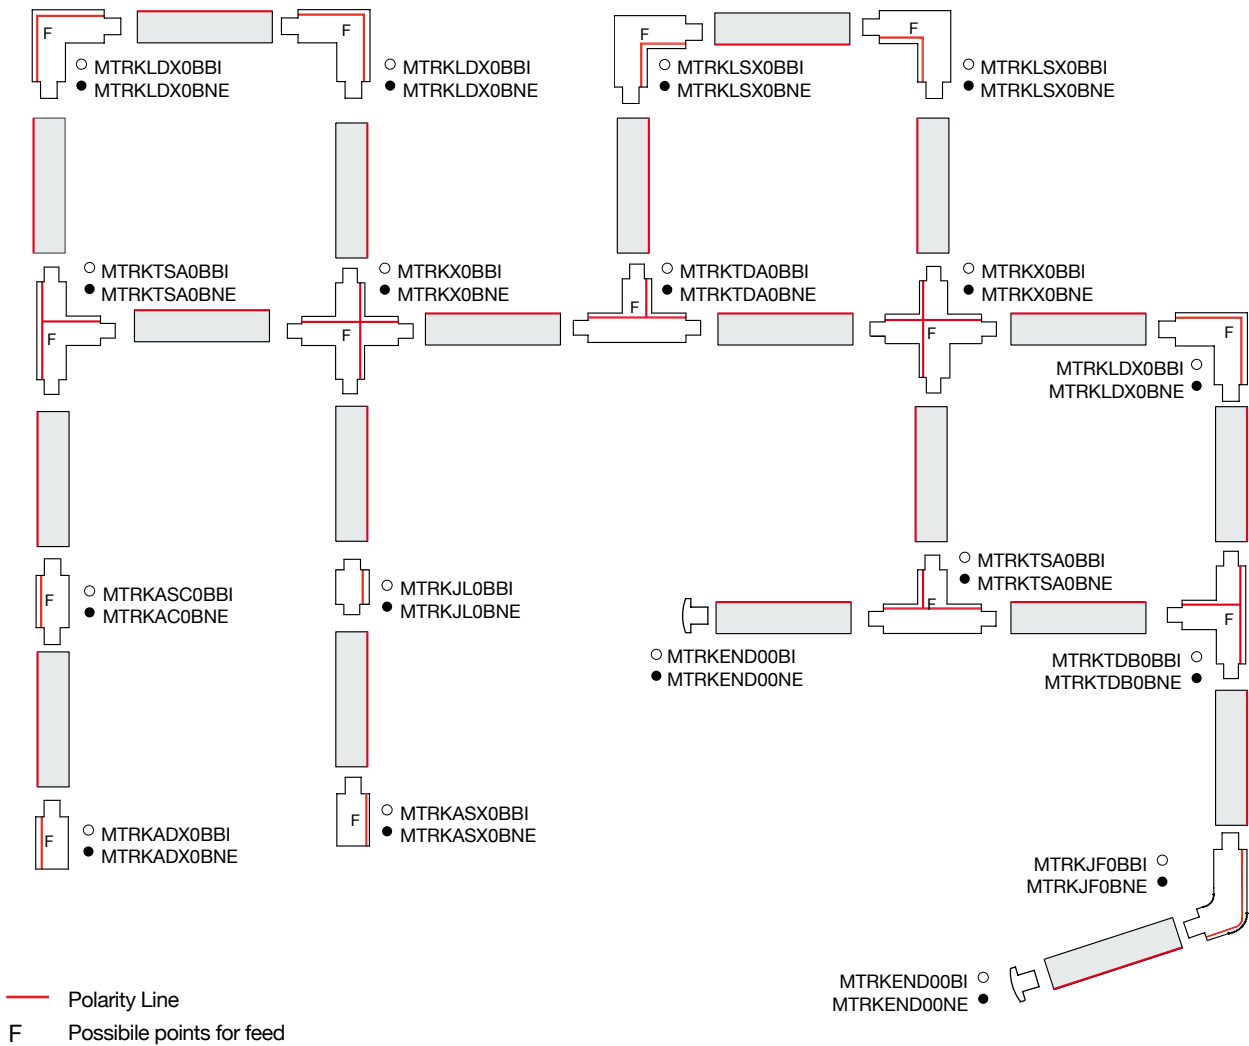


3PHASE /DALI ACCESSORY

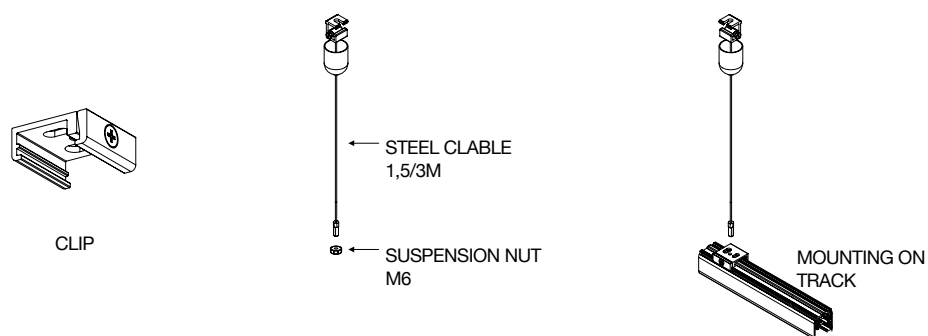

POLARITY INSTRUCTIONS

DALI/1-10V EXAMPLE

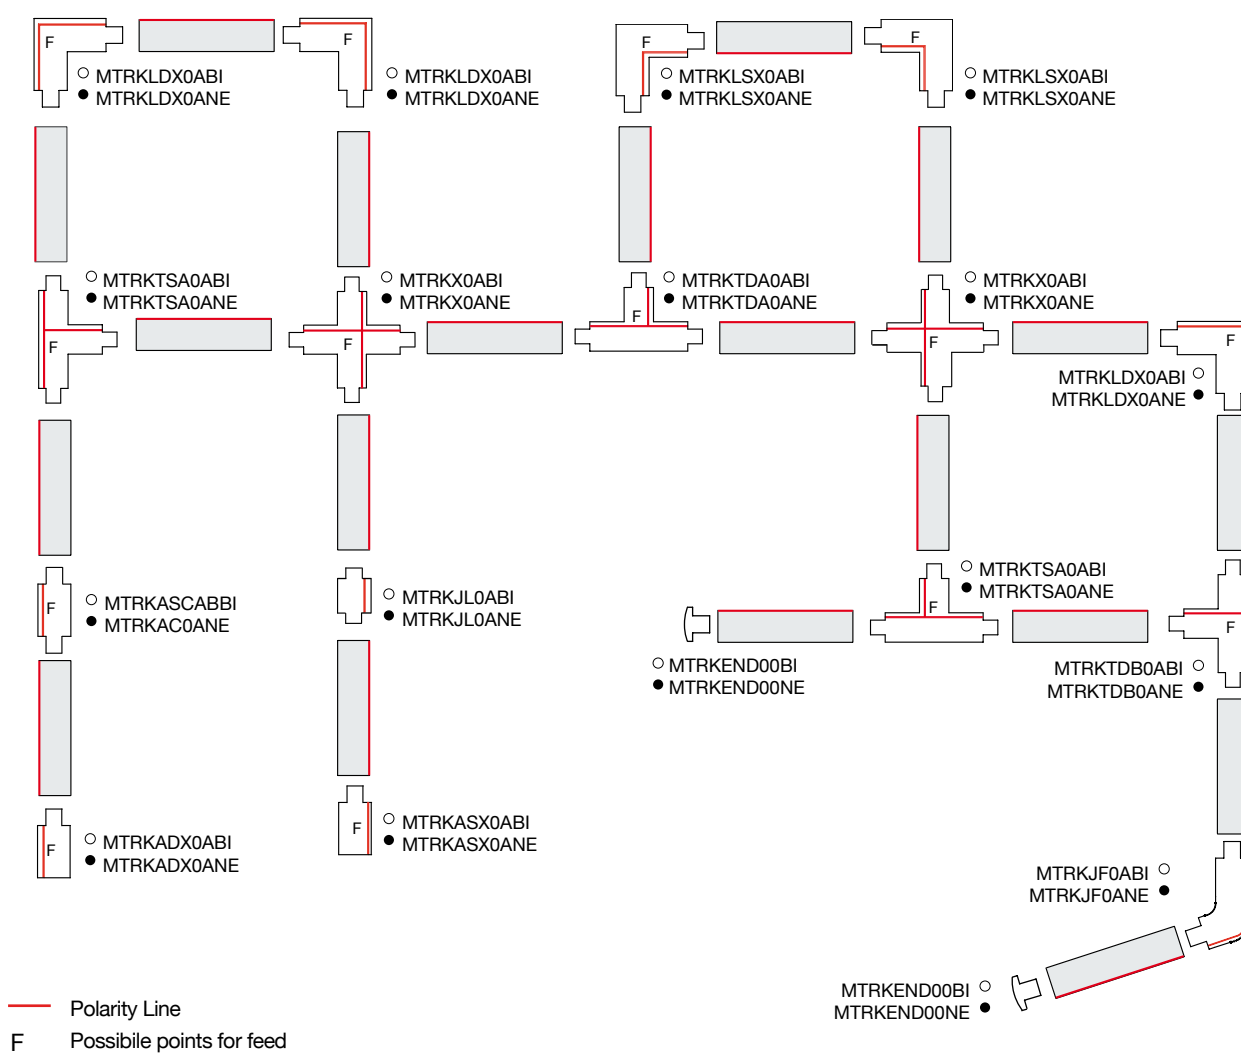



GRAVITY



GRAVITY

IT

GRAVITY è il nuovo sistema magnetico a binario. Una galassia di elementi grafici versatili e distintivi in grado di fornire un effetto luminoso focale. Ogni elemento è installabile tramite fissaggio magnetico e dotato di una sicurezza supplementare meccanica. Disponibile nelle versioni trimless, a soffitto e a sospensione, le unità lineari si alimentano a 48V e consentono l'integrazione di più soluzioni, rispondendo alle diverse esigenze d'interni. La massima flessibilità degli spot orientabili valorizza gli ambienti e la lente antiriflesso arretrata permette di ottenere un'illuminazione d'accento o diffusa. I moduli lineari presentano uno schermo opalino per un'illuminazione omogenea e accogliente. Per un elevato comfort visivo e un controllo ottimale dell'abbagliamento su tutta la superficie, il sistema è completato da unità UGR<19: recessed o fold, rispettivamente per un'emissione di luce diretta o orientabile. GRAVITY può essere installato singolarmente o in configurazioni multiple, creando figure geometriche con angoli di 90°. Il sistema si completa ora con due nuovi elementi, TUBE e SPHERE, che aggiungono un'ulteriore valore di estetica e funzionalità, in linea con le altre unità proposte.

EN

GRAVITY is the new magnetic track system. A galaxy of versatile and distinctive graphic elements providing a focal lighting effect. Each element can be installed via magnetic fixing and is equipped with an additional mechanical safety feature. Available in trim less, ceiling mounted, and pendant versions, the linear units are powered by 48V and allow the integration of multiple solutions, meeting different interior requirements. The maximum flexibility of the adjustable spots enhances rooms, and the recessed anti-glare lens provides accent or diffuse lighting. The linear modules feature an opal screen for homogeneous, welcoming lighting. For high visual comfort and optimal glare control over the entire surface area, the system is complemented by UGR<19 units: recessed or fold, for direct or adjustable light emission respectively. GRAVITY can be installed individually or in multiple configurations, creating geometric figures at 90° angles. The system is now completed by two new elements, TUBE and SPHERE, which add further aesthetic and functional value.

DE

GRAVITY ist das neue Magnetschienensystem. Eine Galaxie von vielseitigen und unverwechselbaren grafischen Elementen, die einen fokussierten Lichteffekt bieten. Jedes Element wird mit Magneten befestigt und ist mit einer zusätzlichen mechanischen Sicherung ausgestattet. Die Stromschiene, die in den Versionen für rahmenlosen Einbau, für die Deckenmontage und als Pendelleuchten erhältlich sind, werden mit 48 V betrieben und ermöglichen die Integration mehrerer Lösungen, die den unterschiedlichen Anforderungen an die Einrichtung gerecht werden. Die maximale Flexibilität der verstellbaren Spots wertet Räume auf, und die versenkte, blendfreie Linse sorgt für Akzentbeleuchtung oder diffuses Licht. Die linearen Module verfügen über eine opale Abdeckung für eine homogene, einladende Beleuchtung. Für hohen Sehkomfort und optimale Entblendung auf der gesamten Fläche wird das System durch UGR<19-Einheiten ergänzt: Einbau- oder Schwenkbare Leuchten, für direkte bzw. verstellbare Lichtabstrahlung. GRAVITY kann einzeln oder in mehreren Konfigurationen installiert werden, so dass geometrische Figuren in 90°-Winkeln entstehen. Das System wird nun durch zwei neue Elemente, TUBE und SPHERE, vervollständigt, die einen weiteren ästhetischen und funktionalen Mehrwert bieten.

FR

GRAVITY est le nouveau système de rail magnétique. Une galaxie d'éléments graphiques polyvalents et distinctifs capables de fournir un effet d'éclairage focal. Chaque élément peut être installé via une fixation magnétique et équipé d'une sécurité mécanique supplémentaire. Disponibles en versions trimless, plafonnier et suspension, les unités linéaires sont alimentées en 48V et permettent l'intégration de multiples solutions, répondant aux différents besoins intérieurs. La flexibilité maximale des spots orientables met en valeur les environnements et la lentille antireflet encastrée permet d'obtenir un éclairage ponctuel ou diffus. Les modules linéaires disposent d'un écran opalin pour un éclairage homogène et accueillant. Pour un confort visuel élevé et un contrôle optimal de l'éblouissement sur toute la surface, le système est complété par des unités UGR<19 : encastrées ou rabattables, pour une émission lumineuse respectivement directe ou orientable. GRAVITY peut être installé individuellement ou dans plusieurs configurations, créant des figures géométriques avec des angles de 90°. Le système est désormais complété par deux nouveaux éléments, TUBE et SPHERE, qui ajoutent une valeur esthétique et fonctionnelle supplémentaire, en ligne avec les autres unités proposées.



SPOT

3W

voltage	max power	source	flux	optic	CRI	switching	CCT	finish	code
48V	3W	1x LED	175lm	38°	90	DALI	2700K	black	MFLE5201746DAN
48V	3W	1x LED	205lm	38°	90	DALI	3000K	black	MFLE5201746WAN

8W

48V	8W	1x LED	500lm	15°	90	DALI	2700K	black	MFLE5201344DAN
48V	8W	1x LED	630lm	38°	90	DALI	2700K	black	MFLE5201744DAN
48V	8W	1x LED	520lm	15°	90	DALI	3000K	black	MFLE5201344WAN
48V	8W	1x LED	665lm	38°	90	DALI	3000K	black	MFLE5201744WAN


12W

48V	12W	1x LED	900lm	15°	90	DALI	2700K	black	MFLE5201345DAN
48V	12W	1x LED	890m	38°	90	DALI	2700K	black	MFLE5201745DAN
48V	12W	1x LED	965lm	15°	90	DALI	3000K	black	MFLE5201345WAN
48V	12W	1x LED	930lm	38°	90	DALI	3000K	black	MFLE5201745WAN


note driver, track and accessories not included (more info on p.40-43)

CE UK CA IP20


SPOT 3W




SPOT 8W




SPOT 12W




OPTICS AND MOVEMENTS



3W



8W



12W



spot 3W



spot 8W



spot 12W






Track ceiling + spot 8W + dash 30W, black.
Track trimless + dash 30W, black.
Private residence, Valencia



Track trimless + UGR fold + spot 8W, black.
Private project, Venice

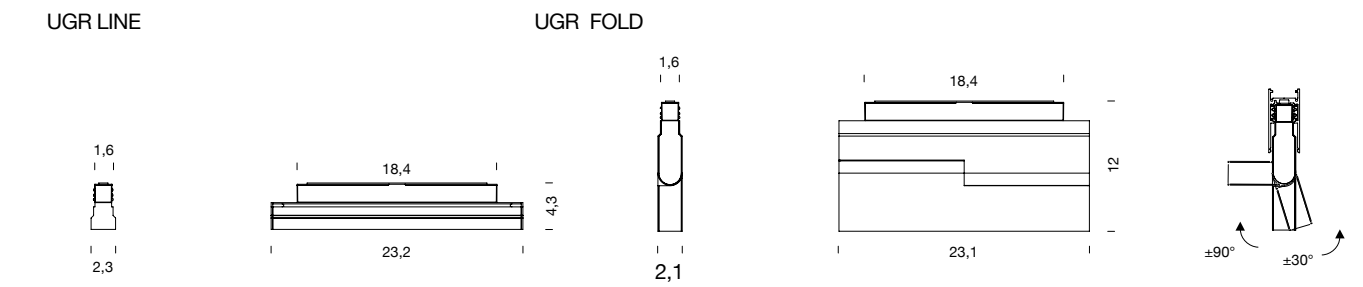

UGR LINE

voltage	max power	source	flux	optic	CRI	switching	CCT	finish	code
48V	15W	12x LED	1135lm	35°	90	DALI	2700K	black	MFLE5302U48DAN
48V	15W	12x LED	1320lm	35°	90	DALI	3000K	black	MFLE5302U48WAN
note driver, track and accessories not included (more info on p.40-43)									

CE UK CA IP20 UGR<19



UGR line

UGR FOLD

voltage	max power	source	flux	optic	CRI	switching	CCT	finish	code
48V	20W	12x LED	1560lm	36°	90	DALI	2700K	black	MFLE5202T48DAN
48V	20W	12x LED	1610lm	36°			3000K	black	MFLE5202T48WAN
note driver, track and accessories not included (more info on p.40-43)									

customizations asymmetric optic


CE UK CA IP20 UGR<19




UGR fold



DASH 10W

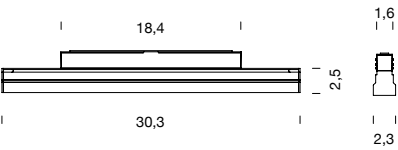

DASH 30W



DASH

10W

voltage	max power	source	flux	optic	CRI	switching	CCT	finish	code
48V	10W	LED strip	510lm	112°	90	DALI	2700K	black	MFLE5303G47DAN
48V	10W	LED strip	515lm	112°	90	DALI	3000K	black	MFLE5303G47WAN

30W

48V	30W	LED strip	1435lm	112°	90	DALI	2700K	black	MFLE5309G47DAN
48V	30W	LED strip	1510lm	112°	90	DALI	3000K	black	MFLE5309G47WAN

note driver, track and accessories not included (more info on p.40-43)


CE UK CA IP20



dash 10W



dash 30W


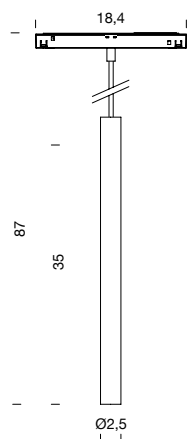


tube


TUBE

voltage	max power	source	flux	optic	CRI	switching	CCT	finish	code
48V	10W	1x LED	468lm	30°	90	DALI	2700K	black	MGRA5601453DAN
48V	10W	1x LED	520m	112°	90	DALI	3000K	black	MGRA5601453WAN
note		driver, track and accessories not included (more info on p.40-43)							

CE UK CA IP20

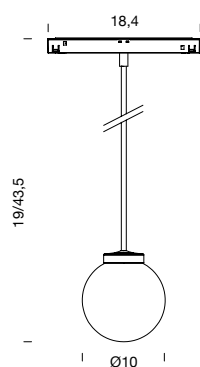

sphere 19cm



sphere 43,5cm

SPHERE

19CM (short rod)

voltage	max power	source	flux	optic	CRI	switching	CCT	finish	code
48V	5W	1x LED	384lm	diffused	90	DALI	2700K	black	MGRA5621G21DAN
48V	5W	1x LED	427lm	diffused	90	DALI	3000K	black	MGRA5621G21WAN
note		driver, track and accessories not included (more info on p.40-43)							

43,5CM (long rod)

voltage	max power	source	flux	optic	CRI	switching	CCT	finish	code
48V	5W	1x LED	384lm	diffused	90	DALI	2700K	black	MGRA5641G21DAN
48V	5W	1x LED	427lm	diffused	90	DALI	3000K	black	MGRA5641G21WAN
note		driver, track and accessories not included (more info on p.40-43)							


CE UK CA IP20



Tube, black.
Private project, Valencia


GRAVITY


Track installation scheme

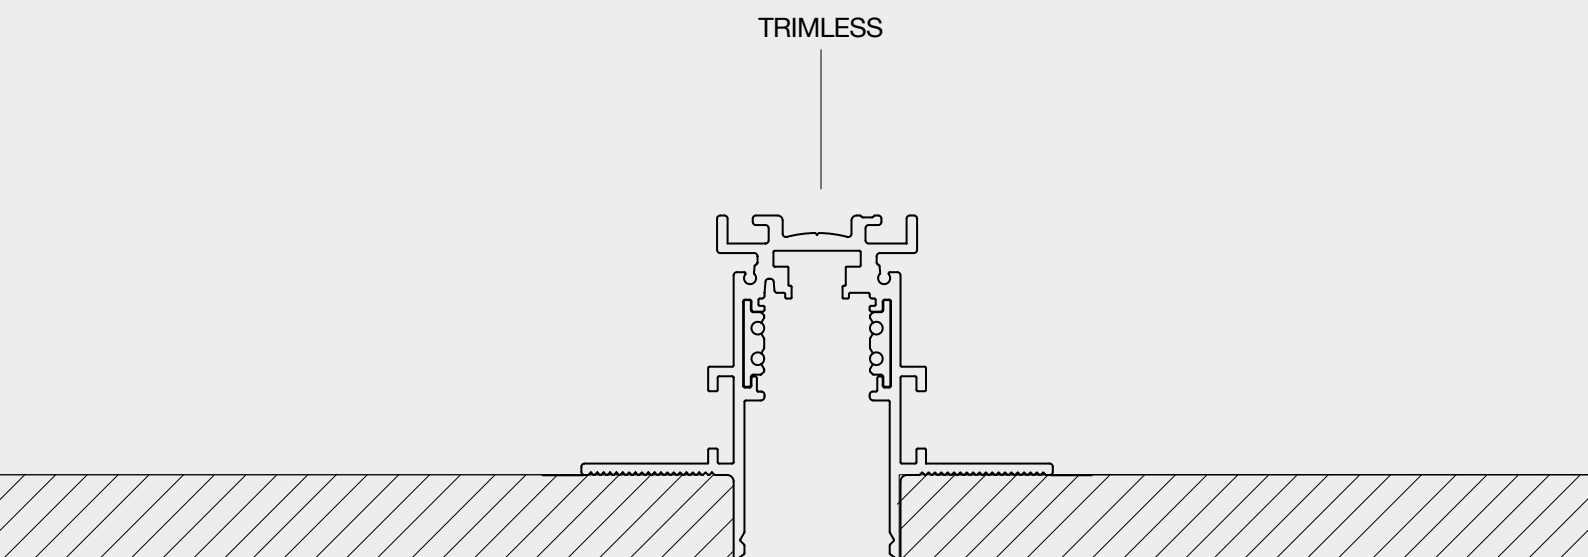

CEILING

SUSPENSION

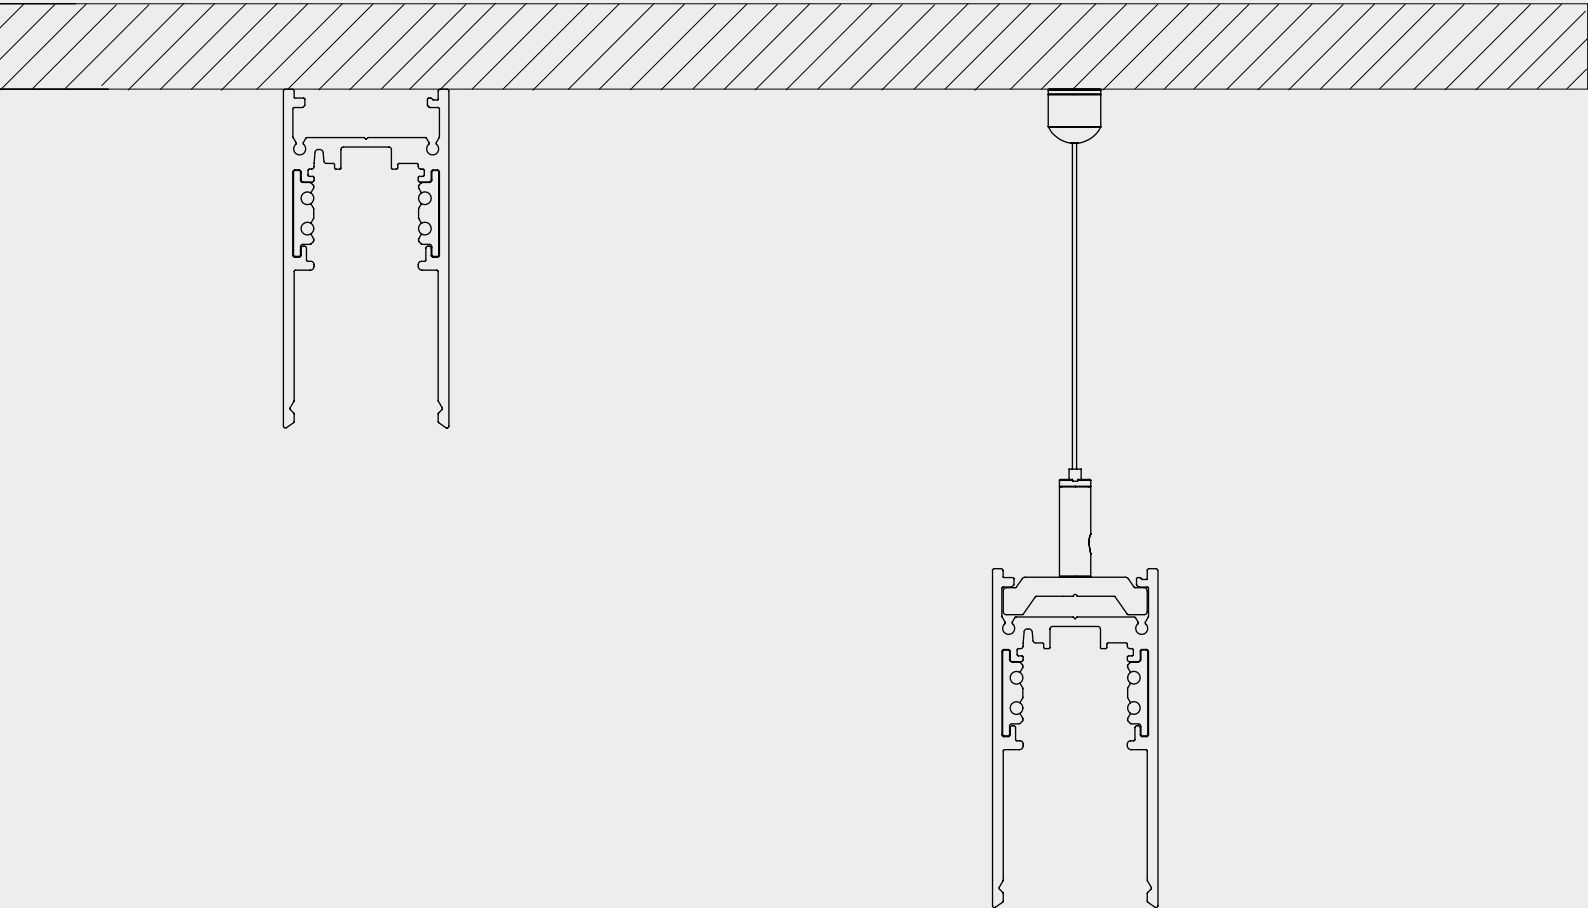

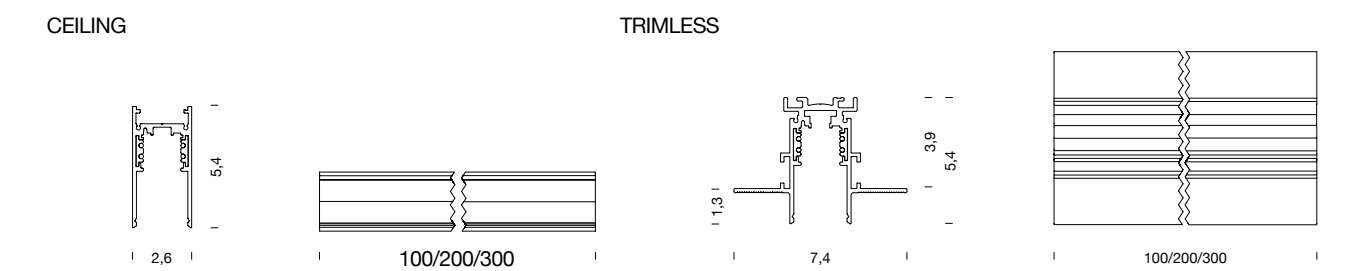


TRACK

version	voltage	mounting	finish	code
track 1m	48V	ceiling	black	MFLE0210NE
track 2m	48V	ceiling	black	MFLE0220NE
track 3m	48V	ceiling	black	MFLE0230NE
track 1m	48V	trimless	black	MFLE0810NE
track 2m	48V	trimless	black	MFLE0820NE
track 3m	48V	trimless	black	MFLE0830NE
note	pendant version available (more info on p.42)			
customizations	recessed trim version			



ceiling mounting

trimless mounting

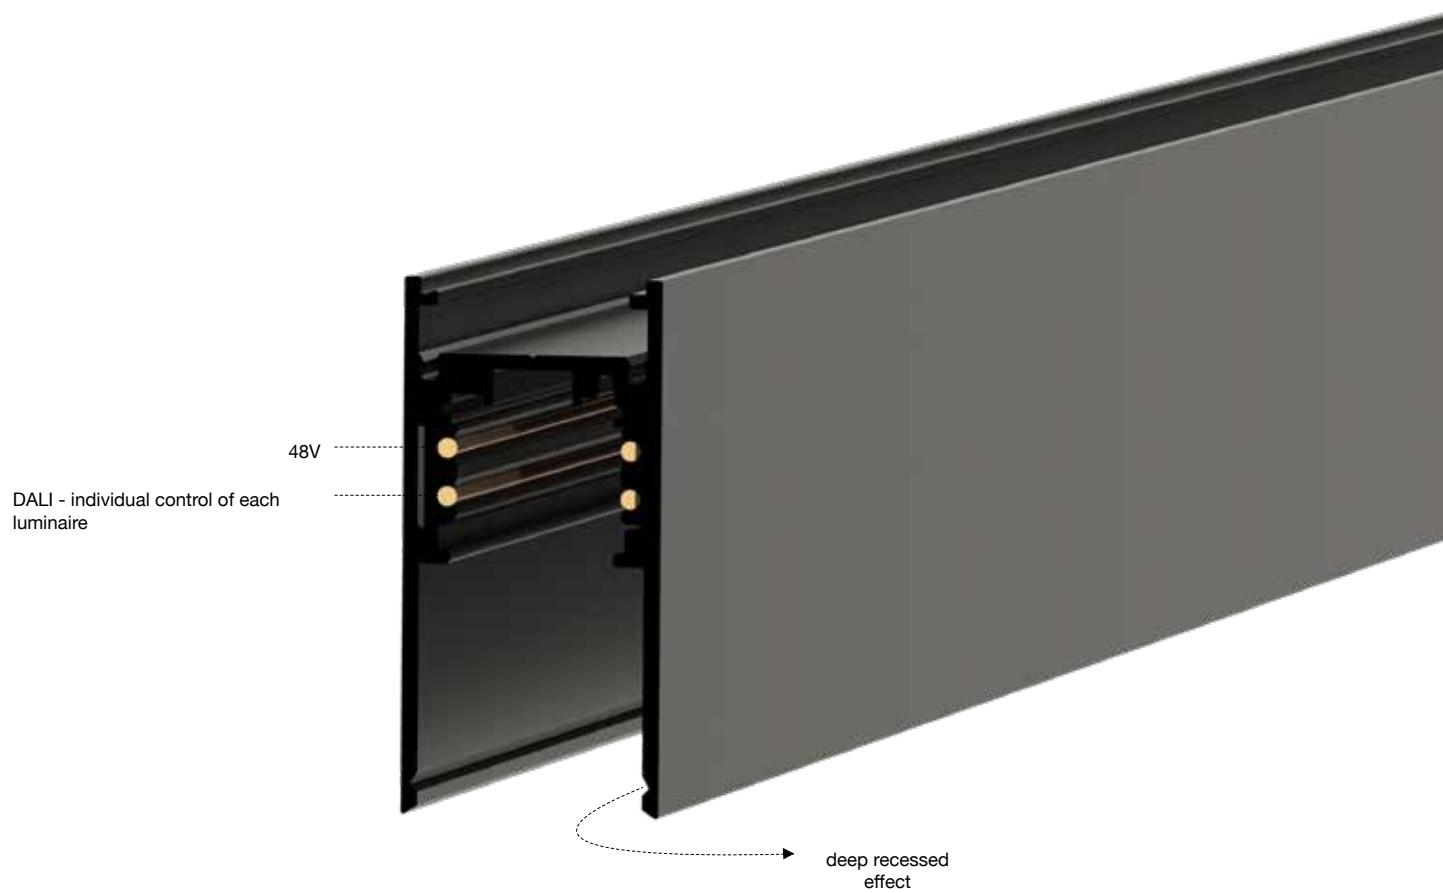

black aluminum end-cap


ACCESSORIES

version	voltage	mounting	finish	code
Track feeding	48V	ceiling/trimless	black	MFLEBKALIM
Track feeding joint	48V	ceiling/trimless	black	MFLEBKGIUNTOAL
Track flexible joint	48V	ceiling/trimless	black	MFLEJF0NE
Ceiling track end-cap	/	ceiling/trimless	black	MFLEEND00NE
Ceiling track end-cap hole	/	ceiling/trimless	black	MFLEEND01NE
Black cover screen	/	ceiling/trimless	black	MFLECOV0030NE
Ceiling track 90° corner	/	ceiling	black	MFLE90C00NE
Suspended Clip Alu	/	pendant/ceiling	black	MFLECL00AL
Suspension gripper + steel cable	/	pendant	black	MFLESUSP030CR
Trimless track 90° corner	/	trimless	black	MFLE90T00NE
Trimless track wall corner internal	/	trimless	black	MFLE90T01NE
Trimless track wall corner external	/	trimless	black	MFLE90T02NE
Trimless track mechanical joint	/	trimless	black	MFLEMJT00NE
Trimless track template	/	trimless	black	MFLE00TEMP


REMOTE DRIVER

version	voltage	max power	IP	switching	code	dimensions cm
48V	IN 100/305VAC - OUT 48VDC	240W	67	ON/OFF	WPSU240W48VIP	22x6,5x3,5

TRACK INTEGRATED DRIVER




load	voltage	max power	IP	switching	code	dimensions cm
48V	IN 220/240VAC - OUT 48VDC	250W	20	ON/OFF	MFLEALIM250/48	40x4,2x2,2




DRIVER BOX

load	finish	code	dimensions cm
1 driver-1 electrical cable	black	BROSPS1NE	31x8x6


COMPATIBLE WITH CEILING AND TRIMLESS TRACK





TRACK FEEDING




TRACK FEEDING JOINT

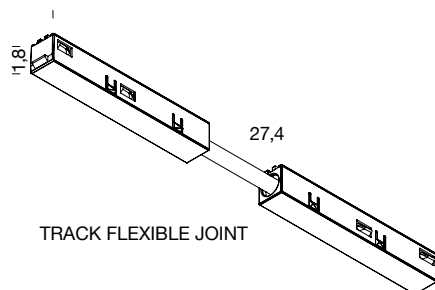



TRACK FLEXIBLE JOINT

CEILING TRACK
END-CAPCEILING TRACK
END-CAP HOLE






COMPATIBLE WITH CEILING TRACK



CEILING TRACK 90° CORNER


SUSPENDED CLIP/
MECHANICAL JOINT
ALUMINUMSUSPENSION GRIPPER +
STEEL CABLEBLACK COVER
SCREEN


COMPATIBLE WITH TRIMLESS TRACK

TRIMLESS TRACK
90° CORNERTRIMLESS TRACK
WALL
CORNER INTERNALTRIMLESS TRACK
WALL
CORNER EXTERNALTRIMLESS TRACK
MECHANICAL JOINTBLACK COVER
SCREEN

GRAVITY

Technical installation scheme

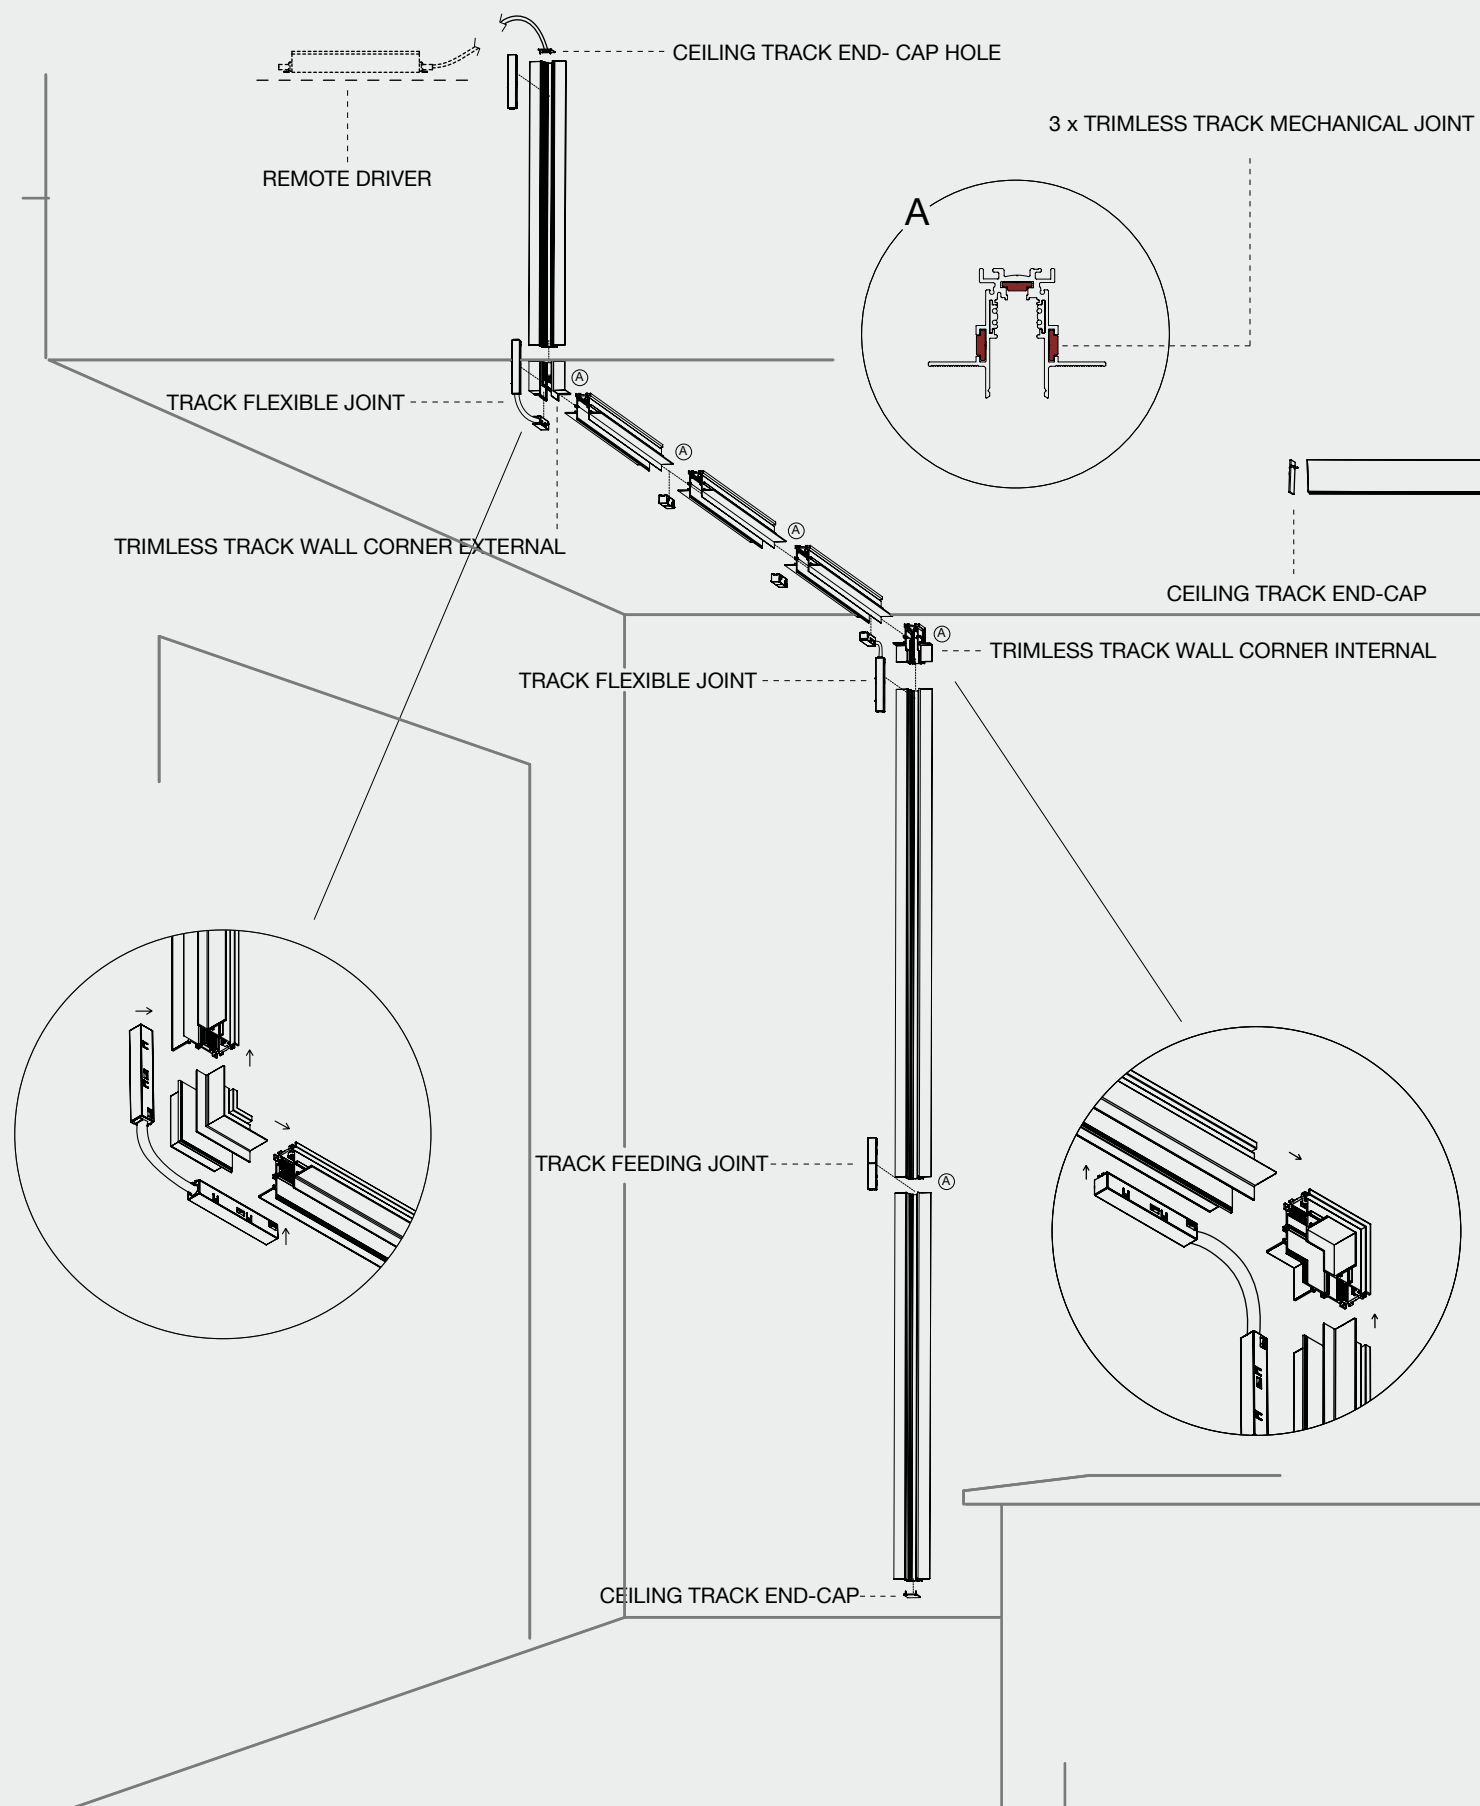

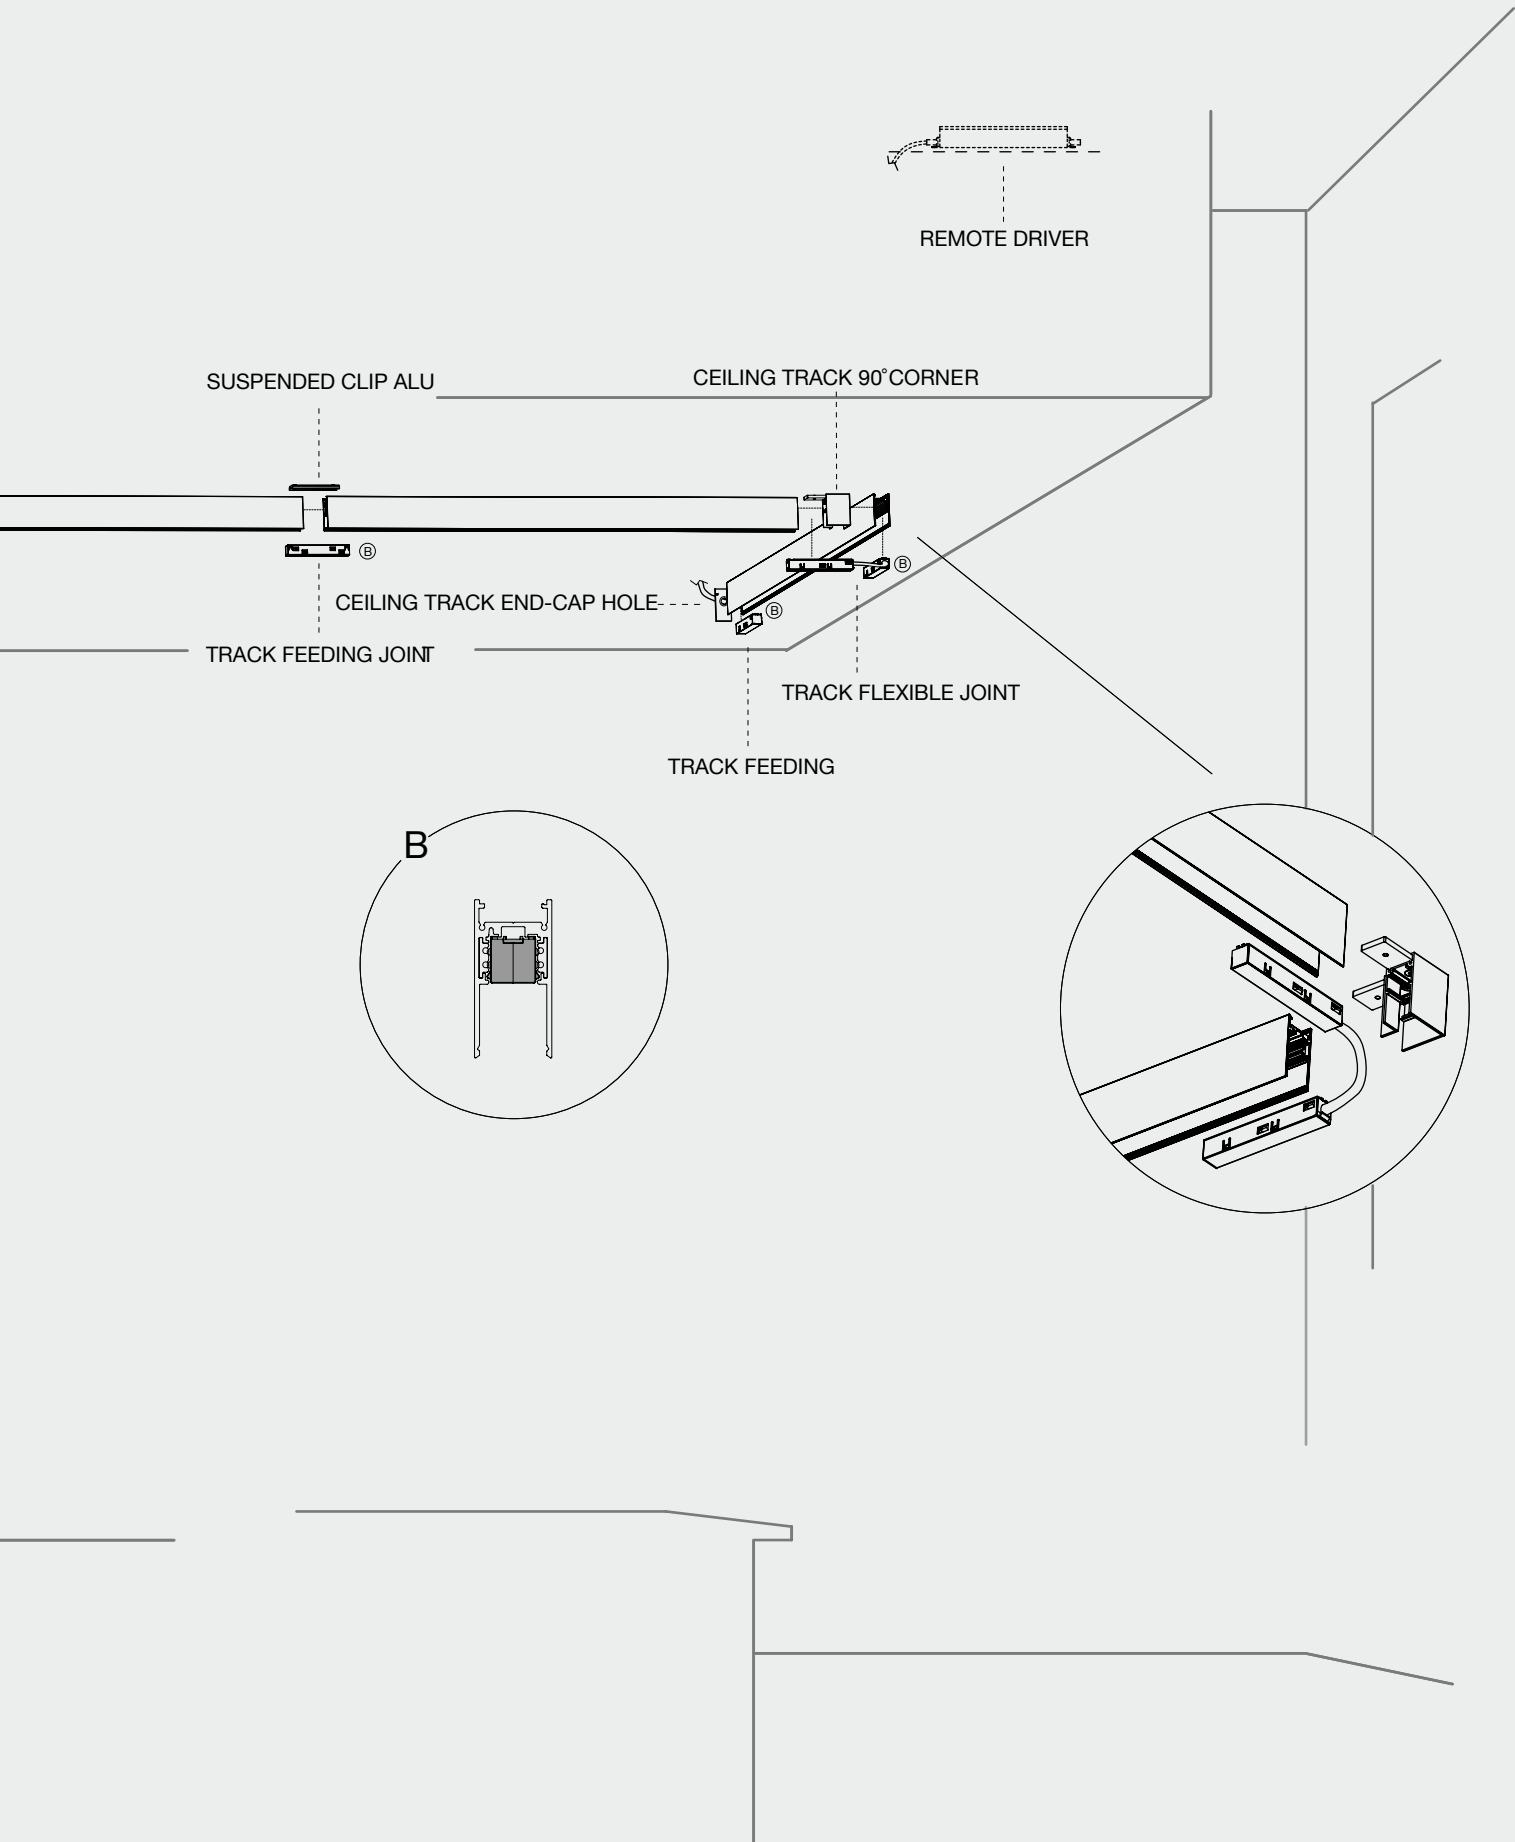



PLINT Massimo Colagrande



PLINT Massimo Colagrande

IT

La famiglia PLINT irrompe nel mondo dell'illuminazione d'accento invertendone il paradigma, grazie ad un'elevata flessibilità di posizionamento. Racchiude al suo interno design e contenuto tecnologico consentendo un'illuminazione discreta e al tempo stesso precisa. All'interno di una struttura metallica è integrato uno spot ad alte prestazioni con ottica variabile con zoom on-board, che ne permette la regolazione del fascio di luce. L'orientabilità del faretto direziona l'emissione luminosa a seconda delle specifiche necessità. La collezione propone PLINT, con finitura nera e con due differenti temperature colore e PLINT BATTERY MINI caratterizzato dalle ridotte dimensioni e da uno spot dalle elevate prestazioni, alimentato con una batteria. PLINT BATTERY MINI è disponibile nelle finiture black, white, gold e silver. La collezione è presentata con dimmer on-board che permette di modulare l'illuminazione in modo puntuale.

EN

PLINT family breaks into the world of accent lighting by inverting its paradigm, thanks to a high flexibility of positioning. Design and technological features are combined to provide discreet and at the same time precise lighting. A high-performance spotlight with variable optics with onboard zoom is integrated into a metal structure, allowing easy adjustment of the light beam. The collection offers PLINT, with a black finish and two different color temperatures, and PLINT BATTERY MINI, characterized by its small size and a high performance spot, powered by a battery. PLINT BATTERY MINI is available in black, white, gold, and silver finishes. Onboard dimmer for precise lighting modulation.

DE


Die Kollektion PLINT erobert die Welt der Akzentbeleuchtung, indem sie deren Konzept dank eines hohen Maßes an Flexibilität bei der Positionierung auf den Kopf stellt. Sie vereint Design und technische Aspekte in sich und ermöglicht eine diskrete und dennoch präzise Beleuchtung. Ein leistungsstarker Strahler mit variabler Optik und integriertem Zoom ist in eine Metallstruktur integriert und ermöglicht die Ausrichtung des Lichtkegels. Durch die Verstellbarkeit des Strahlers wird der Lichtaustritt auf die jeweiligen Bedürfnisse angepasst. Die Kollektion bietet PLINT mit schwarzer Oberfläche und zwei verschiedenen Farbtemperaturen und PLINT BATTERY MINI, der sich durch seine geringe Größe und einen leistungsstarken, batteriebetriebenen Strahler auszeichnet. PLINT BATTERY MINI ist in den Farben Schwarz, Weiß, Gold und Silber erhältlich. Die Kollektion ist mit einem eingebauten Dimmer ausgestattet, mit dem die Beleuchtung punktuell reguliert werden kann.

FR

La famille PLINT fait irruption dans le monde de l'éclairage ponctuel, inversant le paradigme, grâce à une grande flexibilité de positionnement. Il réunit design et contenu technologique, permettant un éclairage discret mais précis. Un spot performant à optique variable avec zoom embarqué pour réglage du faisceau est intégré à l'intérieur d'une structure métallique. Le projecteur est orientable pour une émission de lumière en fonction des besoins spécifiques. La collection propose PLINT, avec une finition noire et deux températures de couleur différentes et variateur intégré et PLINT BATTERY MINI caractérisé par sa petite taille et un spot performant, alimenté par une batterie, 3 intensités, disponible en finitions noir, blanc, or et argent.



Plint , black.
Private residence, Milan

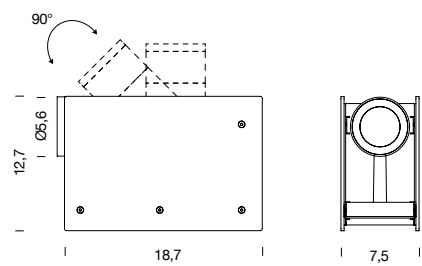

PLINT

voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code
220/240V	13W	1x LED	900lm	direct adjustable 15°-55°	90	push dimm. on board	floor/table	2700K	black	PLT LN2 11
220/240V	13W	1x LED	900lm	direct adjustable 15°-55°	90	push dimm. on board	floor/table	3000K	black	PLT LN3 11
220/240V	13W	1x LED	900lm	direct adjustable 15°-55°	90	push dimm. on board	floor/table	4000K	black	PLT LN4 11
note driver integrated, adjustable beam 15°-55°, orientable spot 90°, cable length 3m										

CE UK CA IP20



dimming control on board




adjustable beam 15°-55°



black finish



Plint , black.
Private residence, Milan



PLINT BATTERY MINI

voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code
5V	2,4W	1xLED	185lm	14°	90	on board	table	3000K	black	PLM BNN 11
5V	2,4W	1xLED	185lm	14°	90	on board	table	3000K	white	PLM BWN 11
5V	2,4W	1xLED	185lm	14°	90	on board	table	3000K	gold	PLM BON 11
5V	2,4W	1xLED	185lm	14°	90	on board	table	3000K	grey	PLM BDN 11
note cable included (USB-C), rechargeable, 5 hours battery life, 4,5 hours charge time (light off)										

CE UK CA IP20



matte black finish



matte white finish



matte grey finish



matte gold finish



Plint Battery Mini, black.
Private residence, Milan





Plint, black.
Private residence, Milan



FLEX SPOT



FLEX SPOT

IT

FLEX CEILING è una gamma di spots orientabili dalle ridotte dimensioni dedicati all'illuminazione d'accento all'interno di vetrine e piccoli espositori.

A seconda dell'ambiente e delle necessità di illuminazione, FLEX propone spots con fissaggio, ottiche e finiture differenti. È declinata nelle versioni con ottica fissa e con ottica zoom 15°- 45°, ed è disponibile nelle finiture black, gold, grey e bronze grey. Lo snodo consente di fissare gli spots a plafone e di orientarli a piacere, secondo le necessità di illuminazione, senza che siano visibili cavi all'esterno.

EN

FLEX CEILING is a range of small adjustable spotlights for accent lighting in display cabinets and small showcases.

Depending on the environment and lighting requirements, FLEX offers spots with different fixings, optics and finishes. Available in the fixed optic and 15°- 45° zoom optic versions, and in black, gold, grey and bronze grey finishes. Thanks to the joint, spotlights can be fixed to the ceiling and oriented as desired, according to lighting needs, without visible cables outside.

DE

FLEX CEILING ist eine Kollektion von kleinen, verstellbaren Strahlern für die Akzentbeleuchtung von Schaufenstern und kleinen Vitrinen.

Je nach Situation und Beleuchtungsanforderungen kann FLEX mit verschiedenen Befestigungen, Optiken und Oberflächen geliefert werden. Es gibt sie in den Versionen mit fester Optik und mit 15°- 45°-Zoom-Optik und in den Oberflächen Schwarz, Gold, Bronzegrau. Die Montage ermöglicht es, die Strahler an der Decke zu befestigen und sie je nach Beleuchtungsbedarf auszurichten, ohne dass Kabel von außen sichtbar sind.


FR

FLEX CEILING est une gamme de spots orientables de petite taille dédiés à l'éclairage ponctuel des vitrines et des petits présentoirs. En fonction de l'environnement et des besoins d'éclairage, FLEX propose des spots avec différentes fixations, optiques et finitions. Il est décliné dans les versions avec optique fixe et avec optique zoom 15°-45°, et est disponible dans les finitions noir, or, gris anodisé naturel et gris bronze. L'articulation permet de fixer les spots au plafond et de les orienter à volonté, selon les besoins d'éclairage, sans que les câbles soient visibles à l'extérieur.




Flex Ceiling, bronze grey.
Private residence, Milan

FIXED OPTIC



ZOOM OPTIC



FLEX CEILING

FIXED OPTIC

current	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code
350mA	4,2W	1x LED	362lm	20°	90	according to driver	wall-ceiling	3000K	black	BFLE0401F21WAN
350mA	4,2W	1x LED	323lm	30°	90	according to driver	wall-ceiling	3000K	black	BFLE0401421WAN
350mA	4,2W	1x LED	362lm	20°	90	according to driver	wall-ceiling	4000K	black	BFLE0401F21NAN
350mA	4,2W	1x LED	323lm	30°	90	according to driver	wall-ceiling	4000K	black	BFLE0401421NAN
350mA	4,2W	1x LED	362lm	20°	90	according to driver	wall-ceiling	3000K	gold	BFLE0401F21WAO
350mA	4,2W	1x LED	323lm	30°	90	according to driver	wall-ceiling	3000K	gold	BFLE0401421WAO
350mA	4,2W	1x LED	362lm	20°	90	according to driver	wall-ceiling	4000K	gold	BFLE0401F21NAO
350mA	4,2W	1x LED	323lm	30°	90	according to driver	wall-ceiling	4000K	gold	BFLE0401421NAO
350mA	4,2W	1x LED	362lm	20°	90	according to driver	wall-ceiling	3000K	grey	BFLE0401F21WAA
350mA	4,2W	1x LED	323lm	30°	90	according to driver	wall-ceiling	3000K	grey	BFLE0401421WAA
350mA	4,2W	1x LED	362lm	20°	90	according to driver	wall-ceiling	4000K	grey	BFLE0401F21NAA
350mA	4,2W	1x LED	323lm	30°	90	according to driver	wall-ceiling	4000K	grey	BFLE0401421NAA
350mA	4,2W	1x LED	362lm	20°	90	according to driver	wall-ceiling	3000K	bronze grey	BFLE0401F21WAB
350mA	4,2W	1x LED	323lm	30°	90	according to driver	wall-ceiling	3000K	bronze grey	BFLE0401421WAB
350mA	4,2W	1x LED	362lm	20°	90	according to driver	wall-ceiling	4000K	bronze grey	BFLE0401F21NAB
350mA	4,2W	1x LED	323lm	30°	90	according to driver	wall-ceiling	4000K	bronze grey	BFLE0401421NAB

ZOOM OPTIC

350mA	4,2W		76lm (45°)	15°-45°	90	according to driver	wall-ceiling	3000K	black	BFLE0401921WAN
350mA	4,2W		80lm (45°)	15°-45°	90	according to driver	wall-ceiling	4000K	black	BFLE0401921NAN

note driver not included (more specifications on p.201), orientable spot ±42°, orientable spot on ball joint 360°, series connection

customizations CCT 2700K

CE UK CA IP40



black finish



grey finish



bronze grey finish



gold finish

FLEX CEILING DRIVER

[illegible]

ALICUDI SALINA LIPARI LUX INDOOR PATTERN CUCÙ POP-UP HEY!

IT

Famiglia di faretti ad incasso downlight per un'illuminazione generale e d'accento in interni. Questa collezione è caratterizzata dal design essenziale, la luce soft con sistema antiabbagliamento e la facilità di installazione. SALINA e LIPARI, ruotano di 30° in verticale e di 355° in orizzontale, per orientare la luce a piacere e creare un'illuminazione dedicata. Gli anelli decorativi esterni, proposti in quattro finiture, possono essere facilmente sostituiti grazie ad un sistema magnetico. ALICUDI viene qui presentato con un'estetica rinnovata e SALINA è ora disponibile anche in versione ceiling. LUX INDOOR rappresenta invece la soluzione miniaturizzata dedicata ad un'illuminazione decorativa e di segnalazione. Sono qui presentate inoltre le novità CUCÙ, POP-UP, PATTERN e HEY! Orientabili o con ottica fissa, sono proposti in differenti finiture e integrano la famiglia, offrendo una soluzione adatta ad ogni esigenza di illuminazione.

EN

Collection of recessed downlight spotlights for indoor general and accent lighting. Featuring an essential design, anti-glare soft lighting and easy installation. SALINA and LIPARI, rotate 30° vertically and 355° horizontally, to direct the light as desired. The external decorative rings, offered in four finishes, can be easily replaced thanks to a magnetic system. ALICUDI is offered with a renewed look and SALINA is now also available in a ceiling version. LUX INDOOR represents the miniaturised solution dedicated to decorative and path lighting. The collection is further complemented by the novelties CUCÙ, POP-UP, PATTERN and HEY! Adjustable or with fixed optics, they are offered in different finishes and complement the family, offering a solution for every lighting requirement.

DE


Eine Familie von Einbaudownlights für die Allgemein- und Akzentbeleuchtung in Innenräumen. Diese Kollektion zeichnet sich durch ihr schlichtes Design, ihr weiches Licht mit Blendschutz und ihre einfache Installation aus. Erhältlich in verschiedenen Ausführungen, Lichtkegeln und Farbtemperaturen. SALINA und LIPARI sind um 30° schwenk- und 355° drehbar, um das Licht nach Wunsch zu richten und eine individuelle Ausleuchtung zu schaffen. Die in vier glänzenden und satinierten Ausführungen erhältlichen Dekorringe lassen sich dank eines Magnetsystems leicht austauschen. ALICUDI präsentiert sich hier in einer neuen Ästhetik und SALINA ist jetzt auch als Deckenleuchte erhältlich. LUX INDOOR ist die Miniaturlösung für dekorative Beleuchtung und Wegebeleuchtung. Die Kollektion wird außerdem durch die Neuheiten CUCÙ, POP-UP, PATTERN und HEY! abgerundet. Sie sind verstellbar oder mit fester Optik, werden in verschiedenen Ausführungen angeboten und ergänzen die Familie, indem sie eine Lösung für jeden Beleuchtungsanspruch bieten.

FR

Famille de downlights encastrés pour l'éclairage général et ponctuel des intérieurs. Cette collection se caractérise par son design essentiel, sa lumière douce avec système anti-éblouissant et sa facilité d'installation. Disponible en différentes finitions, faisceaux optiques et températures de couleur. SALINA et LIPARI pivotent de 30° verticalement et de 355° horizontalement, pour orienter la lumière comme vous le souhaitez et créer un éclairage dédié. Les anneaux décoratifs extérieurs, disponibles en quatre finitions brillantes et satinées, peuvent être facilement remplacés grâce à un système magnétique. ALICUDI est présenté ici avec une esthétique renouvelée et SALINA est désormais également disponible en version plafonnier. LUX INDOOR représente la solution miniaturisée dédiée à l'éclairage décoratif et à l'éclairage de chemin. La collection est également complétée par les nouveaux CUCÙ, POP-UP, PATTERN et HEY! Orientables ou à optique fixe, ils sont proposés en différentes finitions et intègrent la famille, offrant une solution adaptée à chaque besoin d'éclairage.




Salina Trim, white - black ring.
Teatro Arcimboldi, Milan

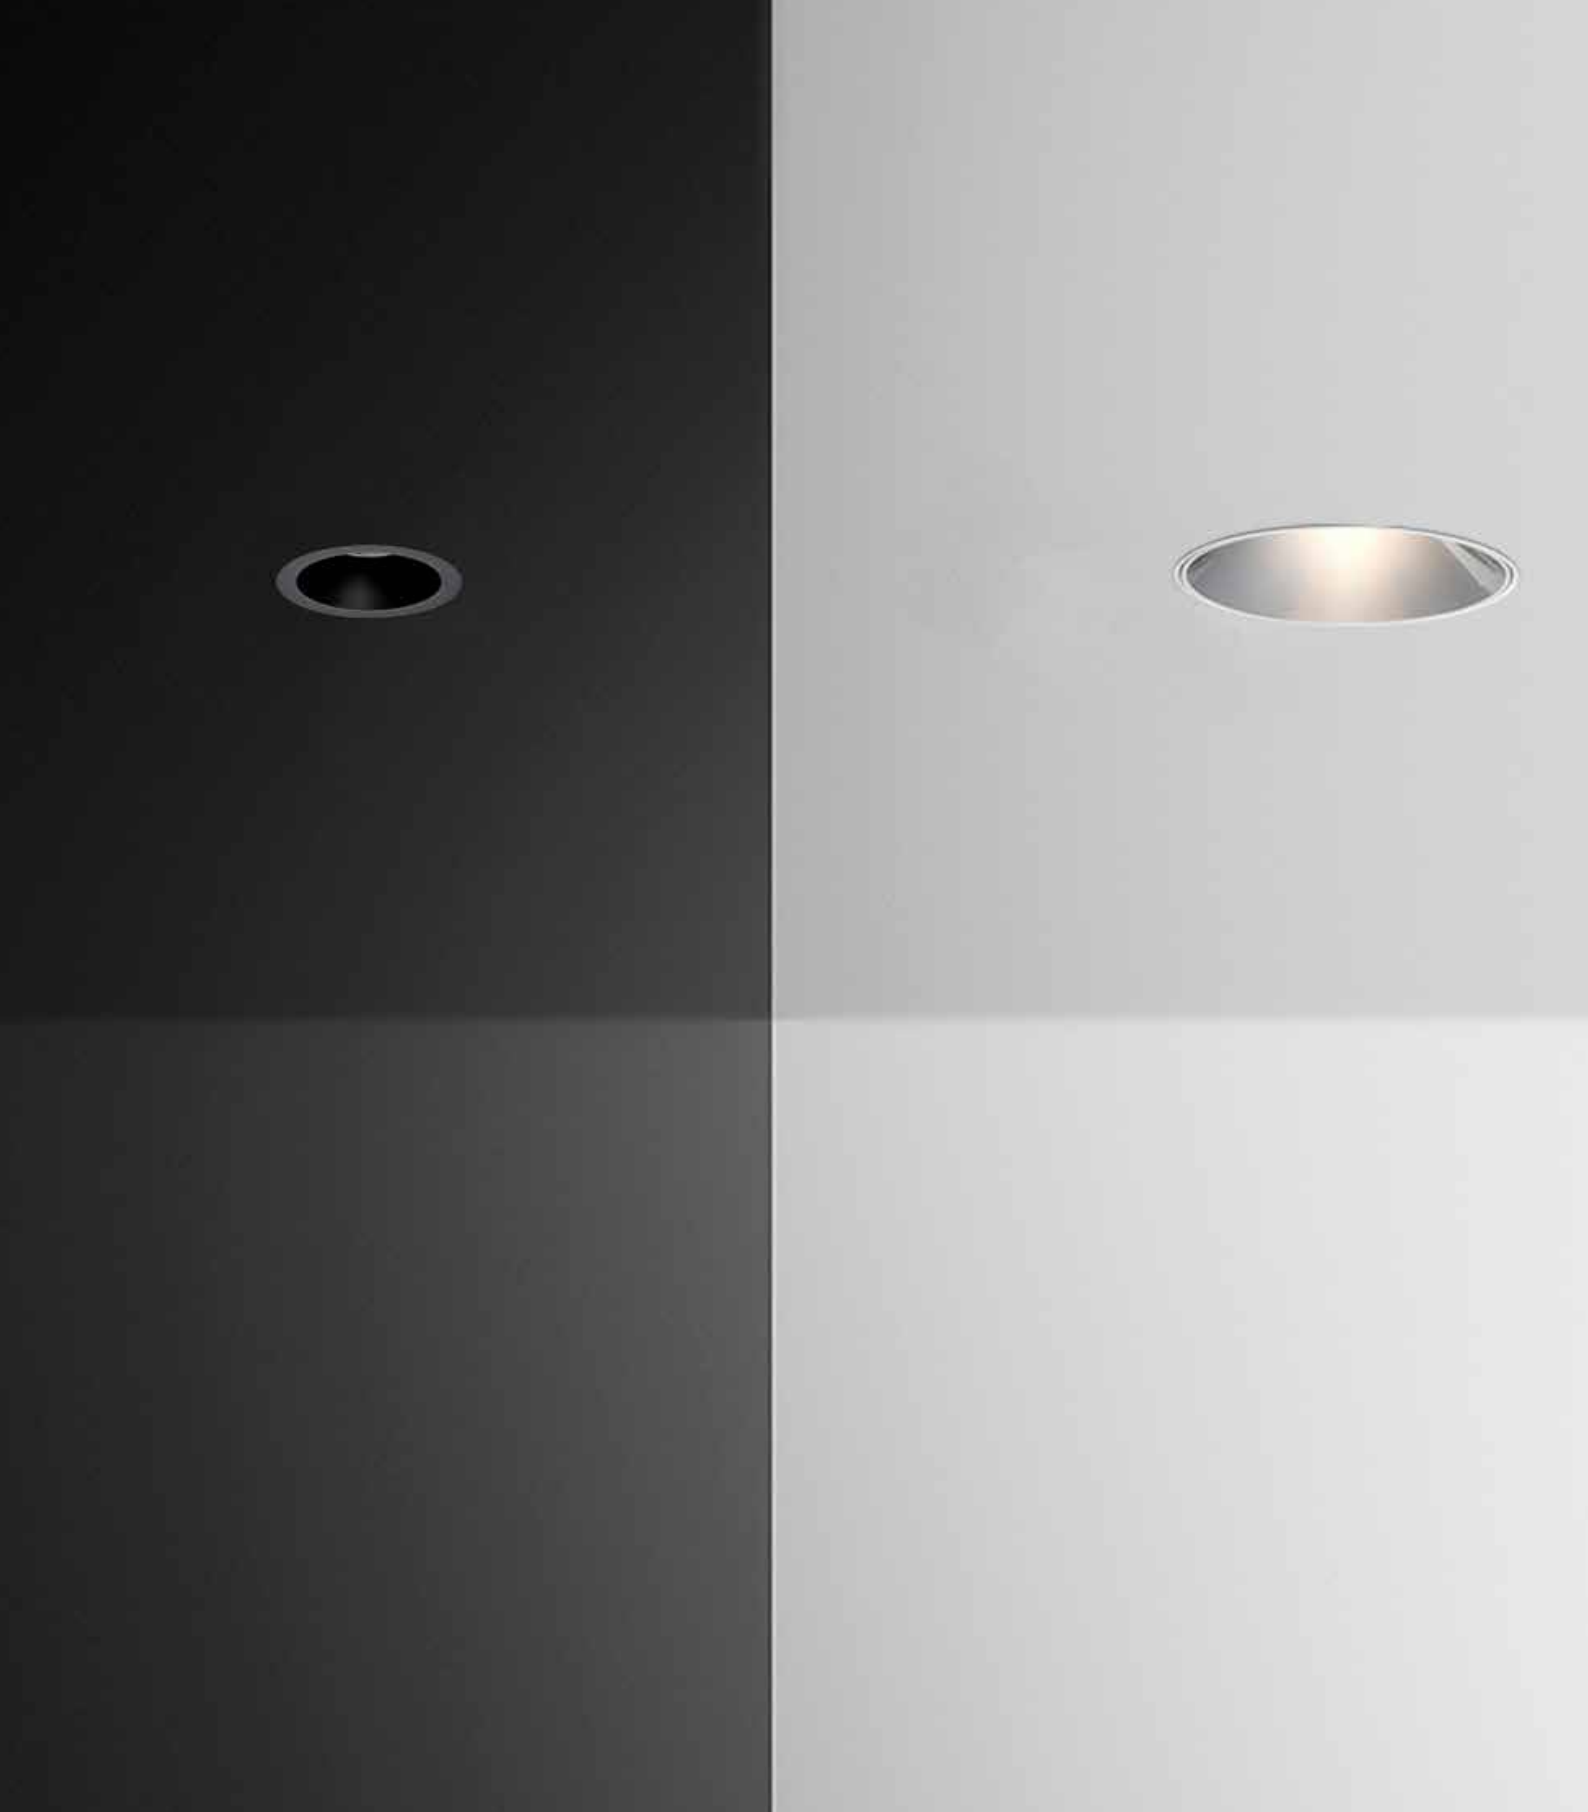

ALICUDI SALINA LIPARI







ALICUDI

[illegible]


CE UK CA IP20

ALICUDI DRIVER


[illegible]



TRIMLESS



TRIM



SALINA

[illegible]

CE UK CA  IP20




recessed trim
SAT LW2 61 + SAR LW1 61



recessed trimless
SAL LW2 61 + SAR LW1 61

SALINA DRIVER[illegible]





SALINA CEILING

voltage	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code
220/250V	12W	1x COB	640lm	15°	90	ON/OFF	ceiling	2700K	white	SAL LW2 41
220/250V	12W	1x COB	640lm	15°	90	ON/OFF	ceiling	2700K	black	SAL LN2 41
220/250V	12W	1x COB	740lm	15°	90	ON/OFF	ceiling	3000K	white	SAL LW3 41
220/250V	12W	1x COB	740lm	15°	90	ON/OFF	ceiling	3000K	black	SAL LN3 41
220/250V	12W	1x COB	670lm	35°	90	ON/OFF	ceiling	2700K	white	SAL LW2 43
220/250V	12W	1x COB	670lm	35°	90	ON/OFF	ceiling	2700K	black	SAL LN2 43
220/250V	12W	1x COB	770lm	35°	90	ON/OFF	ceiling	3000K	white	SAL LW3 43
220/250V	12W	1x COB	770lm	35°	90	ON/OFF	ceiling	3000K	black	SAL LN3 43

note ring not included (more specifications in the table below), anti light loss system


CE UK CA IP20



white finish



black finish

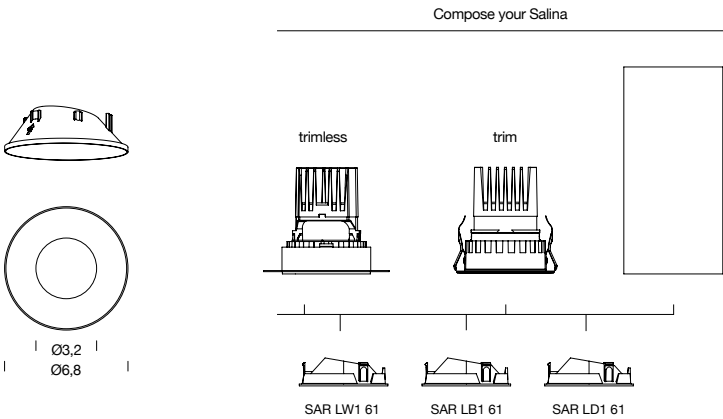

SALINA/SALINA CEILING RING

finish	dimension cm	code
white matte	Ø 6,8	SAR LW1 61
black matte	Ø 6,8	SAR LB1 61
silver glossy	Ø 6,8	SAR LD1 61

note mechanical fixing



glossy silver




matte black




matte white

TRIMLESS

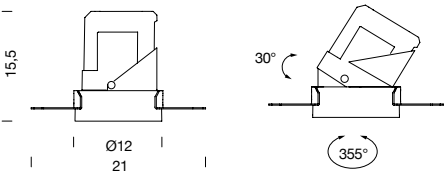

TRIM



LIPARI

current	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code
600mA	22W	1x COB	1400lm	15°	90	according to driver	recessed trimless	2700K	white	LIP LW2 61
600mA	22W	1x COB	1400lm	15°	90	according to driver	recessed trimless	3000K	white	LIP LW3 61
600mA	22W	1x COB	1400lm	35°	90	according to driver	recessed trimless	2700K	white	LIP LW2 63
600mA	22W	1x COB	1400lm	35°	90	according to driver	recessed trimless	3000K	white	LIP LW3 63
600mA	22W	1x COB	1400lm	15°	90	according to driver	recessed trim	2700K	white	LIT LW2 61
600mA	22W	1x COB	1400lm	15°	90	according to driver	recessed trim	2700K	black	LIT LN2 61
600mA	22W	1x COB	1400lm	15°	90	according to driver	recessed trim	3000K	white	LIT LW3 61
600mA	22W	1x COB	1400lm	15°	90	according to driver	recessed trim	3000K	black	LIT LN3 61
600mA	22W	1x COB	1400lm	35°	90	according to driver	recessed trim	2700K	white	LIT LW2 63
600mA	22W	1x COB	1400lm	35°	90	according to driver	recessed trim	2700K	black	LIT LN2 63
600mA	22W	1x COB	1400lm	35°	90	according to driver	recessed trim	3000K	white	LIT LW3 63
600mA	22W	1x COB	1400lm	35°	90	according to driver	recessed trim	3000K	black	LIT LN3 63
note driver and ring not included (more specifications on next page), orientable spot, anti light loss system, trimless recessed hole Ø 130mm, depth 200mm, trim recessed hole Ø 125mm, depth 200mm, cable length 0,4m										

CE UK CA IP20





Lipari trim



recessed trim



recessed trimless

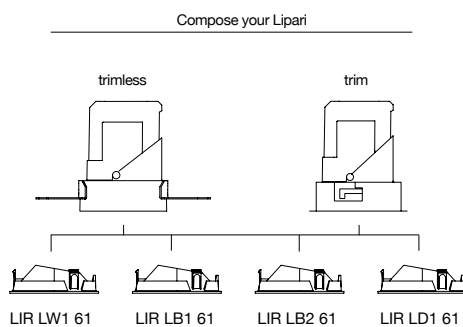

LIPARI RING


finish	dimension cm	code
white matte	Ø11.8	LIR LW1 61
black matte	Ø11.8	LIR LB1 61
black glossy	Ø11.8	LIR LB2 61
silver glossy	Ø11.8	LIR LD1 61
note	magnetic fixing	



white matte



black matte




black glossy




silver glossy

LIPARI DRIVER


[illegible]

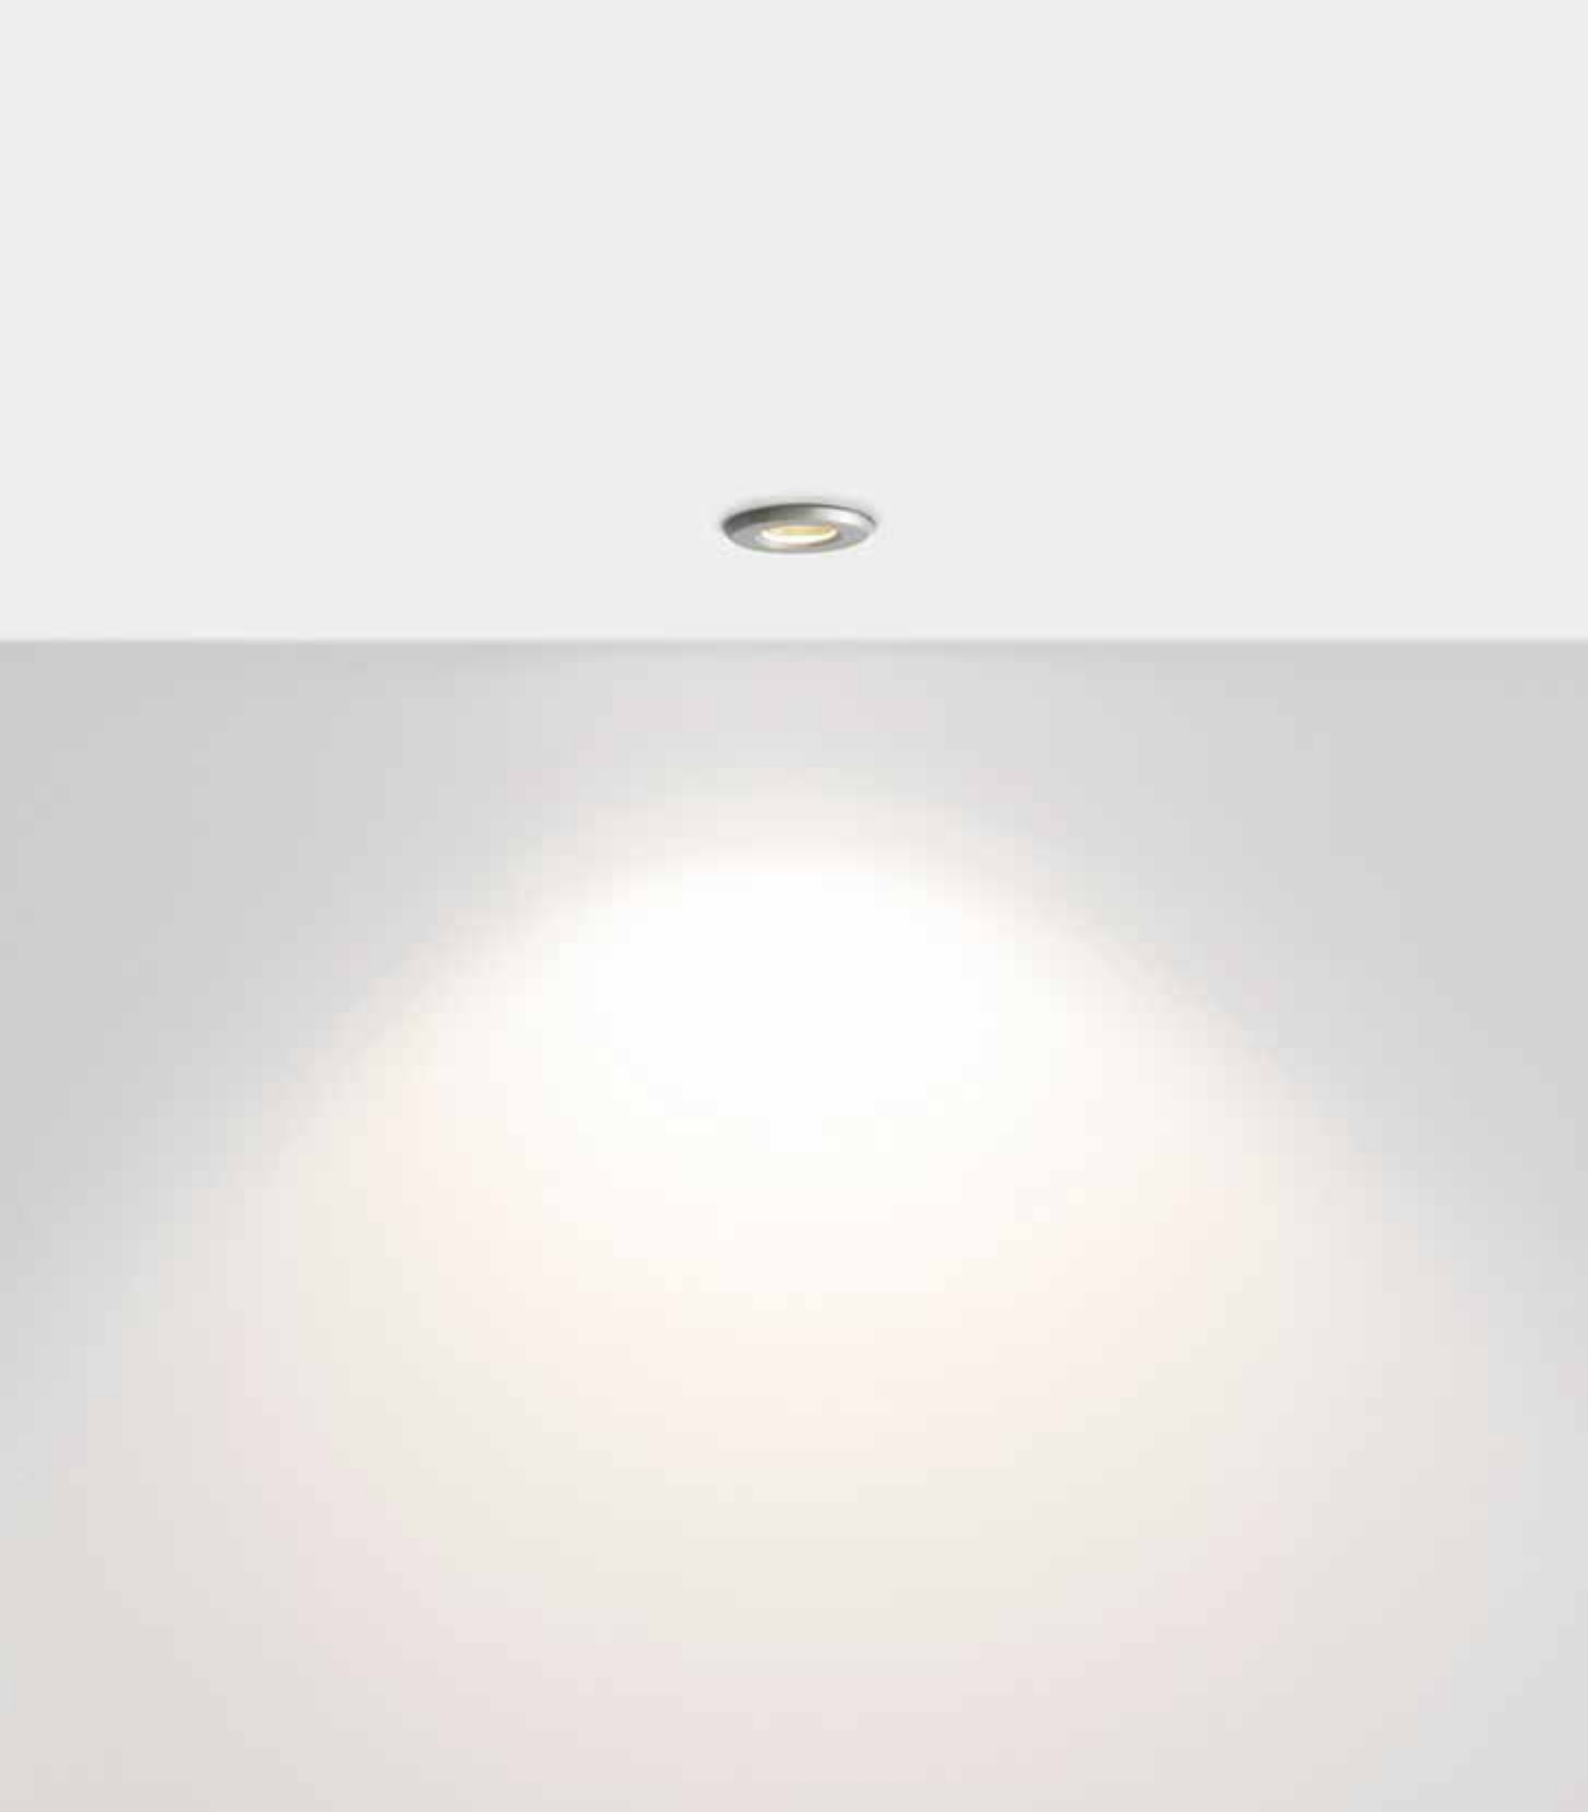

LUX INDOOR

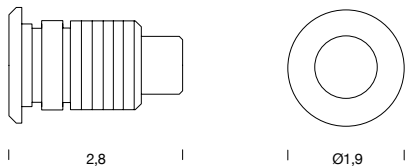

LUX INDOOR

[illegible]

anodized aluminium body


LUX INDOOR DRIVER

[illegible]



PATTERN



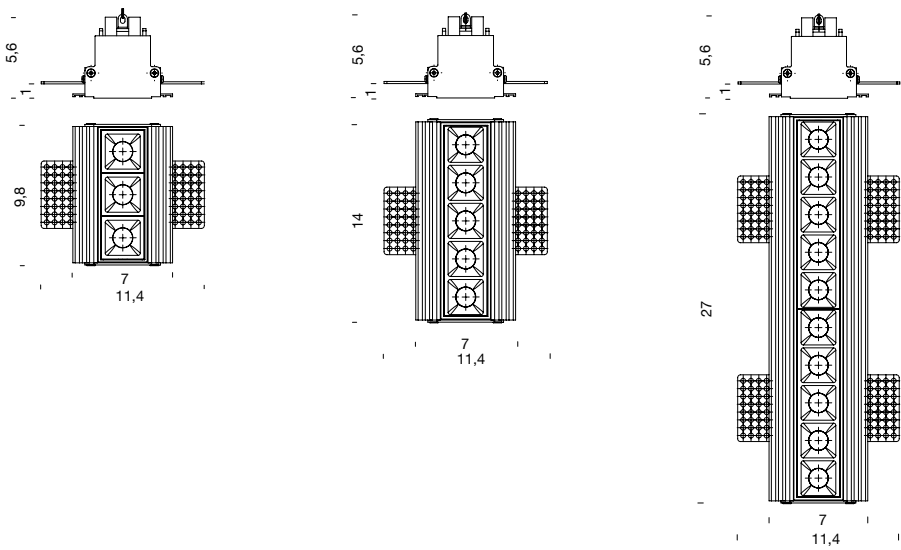

PATTERN 6W

current	max power	source	flux	optic	mounting	CRI	switching	CCT	finish	code
700mA	6W	3x LED	441lm	36°	recessed	90	according to driver	2700K	black	MPAT2103U67DNE
700mA	6W	3x LED	490lm	36°	recessed	90	according to driver	3000K	black	MPAT2103U67WNE
note		RAL 9005 black , driver not included								

CE UK CA IP20 UGR<19

PATTERN 10W

current	max power	source	flux	optic	mounting	CRI	switching	CCT	finish	code
700mA	10W	5x LED	660lm	36°	recessed	90	according to driver	2700K	black	MPAT2105U67DNE
700mA	10W	5x LED	736lm	36°	recessed	90	according to driver	3000K	black	MPAT2105U67WNE
note		RAL 9005 black , driver not included								

CE UK CA IP20 UGR<19

PATTERN 20W

current	max power	source	flux	optic	mounting	CRI	switching	CCT	finish	code
600mA	20W	10x LED	1444lm	36°	recessed	90	according to driver	2700K	black	MPAT2110U67DNE
600mA	20W	10x LED	1444lm	36°	recessed	90	according to driver	3000K	black	MPAT2110U67WNE
note		RAL 9005 black , driver not included								

CE UK CA IP20 UGR<19



PATTERN 6W DRIVER

[illegible]

PATTERN 10W DRIVER

[illegible]


PATTERN 20W DRIVER

load	input voltage	current	max power	Setting	switching	IP	dimensions cm	code
for 1 spot	220-240V	600mA	28W	No	ON/OFF	20	9,7x4,3x3	WPSUND28600
for 1 spot	220-240V	600mA*	25W	Yes	TRIAC	20	11x3x2,2	WPSTST550-900
for 1 spot	220-240V	600mA*	25W	Yes	1-10V	20	13,9x4,2x3	WPS1ST250-1A
for 1 spot	110-277V	600mA*	30W	Yes	DALI	20	13,9x4,2x3	WPSDST250-1A
for 1 spot	220-240V	600mA*	26W	Yes	CASAMBI	20	9,7x4,3x3	WPSCST150-700
note	*to be setted							




CUCÙ POP-UP HEY!



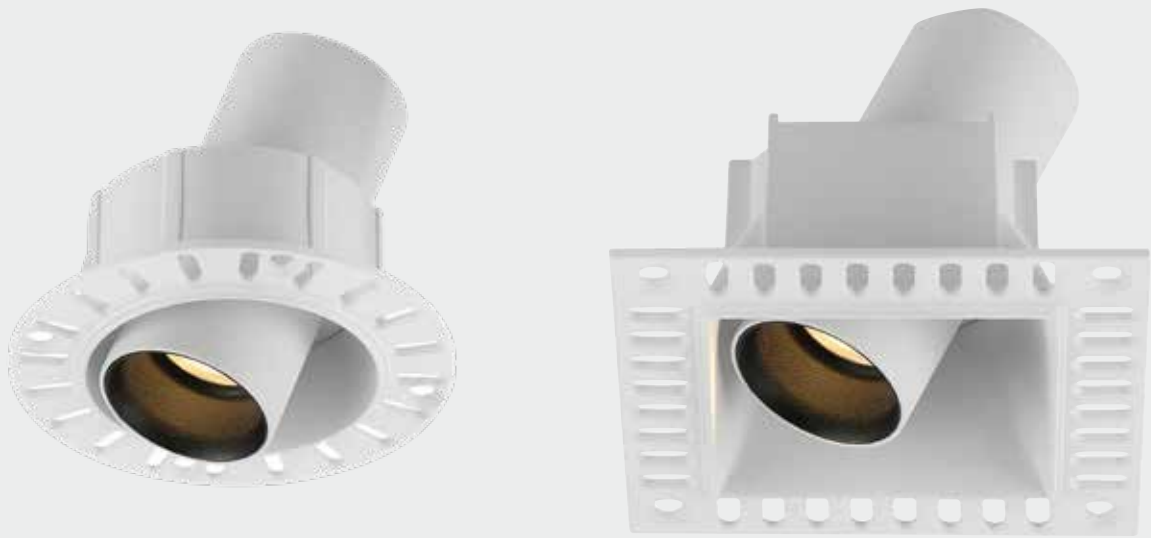

CUCÙ DRIVER


load	input voltage	current	max power	Setting	switching	IP	dimensions cm	code
for 1 cucù	220-240V	150mA*	6,9W	Yes	ON/OFF	20	13,8x3x2,2	WPSUST150-500
for 1 spot	220-240V	150mA*	6,3W	Yes	TRIAC	20	11x3x2,2	WPSTST120-350
for 1 spot	220-240V	150mA*	6,3W	Yes	1-10V	20	11x3x2,2	WPS1ST120-350
for 1 spot	200-240V	150mA*	6,7W	Yes	DALI	20	11x3x2,2	WPSDST120-300
for 1 spot	200-240V	150mA*	7,8W	Yes	CASAMBI	20	9,7x4,3x3	WPSCST150-700
note	*to be settetd							



CUCÙ ROUND

current	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code
150mA	6W	1x COB	450lm	38°	90	according to driver	recessed trimless	2700K	white	MCUR2101759DBO
150mA	6W	1x COB	450lm	38°	90	according to driver	recessed trimless	2700K	black	MCUR2101759DNE
150mA	6W	1x COB	480lm	38°	90	according to driver	recessed trimless	3000K	white	MCUR2101759WBO
150mA	6W	1x COB	480lm	38°	90	according to driver	recessed trimless	3000K	black	MCUR2101759WNE
note driver not included (more specifications on p.82), orientable spot, trimless recessed hole Ø 60mm, cable length 0,25m										

CE UK CA IP20



CUCÙ SQUARE

current	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code
150mA	6W	1x COB	450lm	38°	90	according to driver	recessed trimless	2700K	white	MCUS2101759DBO
150mA	6W	1x COB	450lm	38°	90	according to driver	recessed trimless	2700K	black	MCUS2101759DNE
150mA	6W	1x COB	480lm	38°	90	according to driver	recessed trimless	3000K	white	MCUS2101759WBO
150mA	6W	1x COB	480lm	38°	90	according to driver	recessed trimless	3000K	black	MCUS2101759WNE
note driver not included (more specifications on p.82), orientable spot, trimless recessed hole 65x65mm, cable length 0,25m										

CE UK CA IP20



matte black finish




matte black finish



CE UK CA IP20



load	input voltage	current	max power	Setting	switching	IP	dimensions cm	code
for 1 spot	220-240V	250mA	10W	No	ON/OFF	20	8,8x3,9x2,2	WPSUND10250
for 1 spot	220-240V	250mA*	10W	Yes	TRIAC	20	11x3x2,2	WPSTST120-350
for 1 spot	220-240V	270mA*	10W	Yes	1-10V	20	11x3x2,2	WPS1ST120-350
for 1 spot	200-240V	270mA*	10W	Yes	DALI	20	11x3x2,2	WPSDST120-300
for 1 spot	220-240V	250mA*	13W	Yes	CASAMBI	20	9,7x4,3x3	WPSCST150-700
note	*to be settetd							

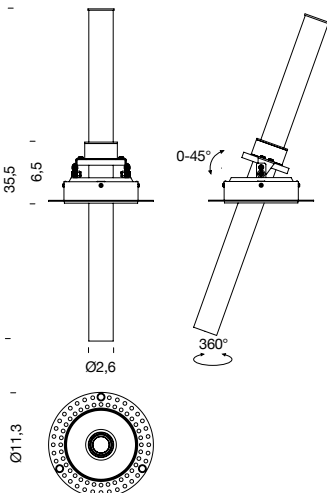

HEY!

current	max power	source	flux	optic	CRI	switching	mounting	CCT	finish	code
700mA	9W	1x LED	520lm	38°	90	according to driver	recessed trimless	2700K	white	MHEY2101U21DBO
700mA	9W	1x LED	520lm	38°	90	according to driver	recessed trimless	2700K	black	MHEY2101U21DNE

note driver not included, orientable spot, recessed hole Ø85mm, cable length 0,9m

CE UK CA  IP20



black finish



white finish

HEY! DRIVER

[illegible]





Elba, black.
"The World of Tim Burton",
Museo Nazionale del Cinema, Turin





Capri Pro, black.
"The World of Tim Burton"
Museo Nazionale del Cinema, Turin



Capri, white
"Galleria Minini ", Milan
Installation views Andrea Rossetti





Plint, black.

Francesco Hayez, "Crocciati che placano la sete"
Musei Reali, Palazzo Reale, Turin.



CREDITS

- Capri at Francesca Minini, Milan. Riccardo Previdi, “andrà tutto bene”, February-March 2022 – Courtesy: the artist and Francesca Minini. Ph. by Andrea Rossetti – p.90
- Capri Pro at Museo Nazionale del Cinema, Turin. “The World of Tim Burton” exhibition – Project: Museo Nazionale del Cinema. Arch. Helga Faletti. Drawings, ©Tim Burton. Ph. Andrea Guermani – p.88
- Elba at Museo Nazionale del Cinema, Turin. “The World of Tim Burton” exhibition – Project: Museo Nazionale del Cinema. Arch. Helga Faletti. Drawings, ©Tim Burton. Ph. Andrea Guermani – p.86
- Elba ceiling and Riga opal at Charlie & Friends, Dubai
Project: XO Atelier – p.12
- Elba at Molteni&C Roma Flagship Store - Ph. Max Zambelli – p.7
- Elba at Valextra boutique, Beijing -
Project: Arch. Martino Gamper – p.11
- Plint at Musei Reali, Palazzo Reale, Turin.
Su concessione del MiC - Francesco Hayez, Crociati che placano la sete, 1838 – 1849, olio su tela, 363 x 589 cm.
Ph. Enrico Muraro - p.92
- Salina at Teatro Arcimboldi, Milan - Project: Giulia Pellegrino, Calvi Ceschia Viganò Architetti Associati. Artistic advice: Arturo Brachetti. Ph. Luca Privitera – p.63

ART DIRECTION AND GRAPHIC DESIGN

Guillaume Bloget and ILTI Luce

PHOTOS

Alberto Strada
Marcello Perego

LOCATION

Musée départemental de la Préhistoire, Nemours (France)
Private Residence, Milan (Italy)
The cultural and sports center Wangari Maathai, Paris (France)
Borgonuovo19, Milan (Italy)

EDITION
April 2024

GENERAL INFORMATION

IT

Obiettivo di ILTI LUCE è quello di proporre soluzioni tecnologiche all'avanguardia, anche tramite un continuo e costante processo di aggiornamento. Per definizione la tecnologia è mutevole ed in costante evoluzione. Sugeriamo, per assicurare la consultazione delle informazioni più recenti sui prodotti, di verificare quelle disponibili sul nostro website www.iltiluce.com. Questo documento è stato redatto a Marzo 2024. Sostituisce ed aggiorna qualsiasi altra pubblicazione in relazione ai prodotti elencati.

A causa di naturali limiti tecnici di riproduzione e stampa, il colore dei modelli a catalogo è puramente indicativo e non può costituire motivo di rivalsa.

Ove non espressamente scritto, le lampadine non sono incluse nella vendita.

EN

ILTI LUCE's goal is to propose cutting-edge technological solutions, also through a constant updating process.

By definition, technology is changing and continuously evolving. To ensure the consultation of the latest product data, we recommend referring to the information available on our website www.iltiluce.com. This document was drafted in March 2024. It replaces and updates any other publication in relation to the listed products. Due to natural technical limitations of reproduction and printing, the colour of the models in the catalogue is purely indicative and cannot constitute grounds for recourse.

Unless expressly stated, light bulbs are not included in the sale.

DE

Das Ziel von ILTI LUCE ist die Entwicklung von technologischen Lösungen auf dem neuesten Stand, auch durch einen ständigen Aktualisierungsprozess. Die Technik entwickelt sich ständig weiter. Um die aktuellsten Produktunterlagen einzusehen, empfehlen wir, sich auf die Informationen auf unserer Website www.iltiluce.com zu beziehen. Dieses Dokument wurde im März 2024 verfasst. Es ersetzt und aktualisiert alle anderen Veröffentlichungen in Bezug auf die aufgeführten Produkte.

Aufgrund der technischen Grenzen der Reproduktion und des Drucks sind die Farben der im Katalog abgebildeten Modelle rein indikativ und können nicht als Reklamationsgrund dienen. Sofern nicht ausdrücklich angegeben, sind die Glühbirnen nicht im Verkauf enthalten.

FR

L'objectif de ILTI LUCE est de proposer des solutions technologiques

de pointe, également à travers un processus de mise à jour constante. Par définition, la technologie évolue et change continuellement. Pour garantir la consultation des dernières données produits, nous vous recommandons de vous référer aux informations disponibles sur notre site www.iltiluce.com.

Ce document a été établi en Mars 2024. Il remplace et met à jour toute autre publication relative aux produits cités.

En raison des limites techniques naturelles de reproduction et d'impression, la couleur des modèles du catalogue est purement indicative et ne peut constituer un motif de réclamation. Sauf mention expresse, les ampoules ne sont pas comprises dans la vente.

IT

L'elenco aggiornato dei prodotti con marchio UL ed ETL e le relative informazioni tecniche sono disponibili sul sito website: nemolighting.com/usa/

EN

The updated list of UL and ETL marked products and relevant technical information are available on the website: nemolighting.com/usa/

DE

Die aktualisierte Liste der UL- und ETL-zertifizierten Produkte und die entsprechenden technischen Informationen finden Sie auf der Website: nemolighting.com/usa/

FR

La liste actualisée des produits marqués UL et ETL et les informations techniques correspondantes sont disponibles sur le site web : nemolighting.com/usa/



Photometric data and more information available on our website:

www.iltiluce.com



Scan the code for Terms & Conditions

ILTI LUCE

ILTI LUCE

Strada Borgata Paradiso, 20
10036 Settimo Torinese - ITALY
Tel. +39 011 765 73 01
info@iltiluce.com

www.iltiluce.com

Part of

NEMO Group

NEMO SHOWROOM MONFORTE

Corso Monforte 19/A,
20122 Milan
Tel +39 02 970 703 40
monforte@nemolighting.com

NEMO GALERIE PARIS

44, Rue du Bac
75007 Paris
Tel +33 (0) 1 486 318 42
ruedubac@nemolighting.fr

NEMO USA

625 Jersey Avenue, Unit 7
New Brunswick, NJ 08901
Tel +1 800 734 5858
usa@nemolighting.com
nemolighting.com/usa/

NEMO COPENHAGEN

Store Kongensgade 118
1264 København
Denmark

