

2025

Zirkol

ILTI LUCE

ILTI LUCE



ZIRKOL










CERTA
OMNIBVS


Index

Main features	14
Custom	32
Home Circle	40
Circle	50
Ceiling	56
Wall	60
Gap	64
Round	68
Side	74
Spot	76
Acoustic	78
UGR	80
Square S	86
Square Q	90
Oval	98
Linear	106
Gamma	116
Drivers / Accessories	122

Zirkol Range

Gamma Zirkol

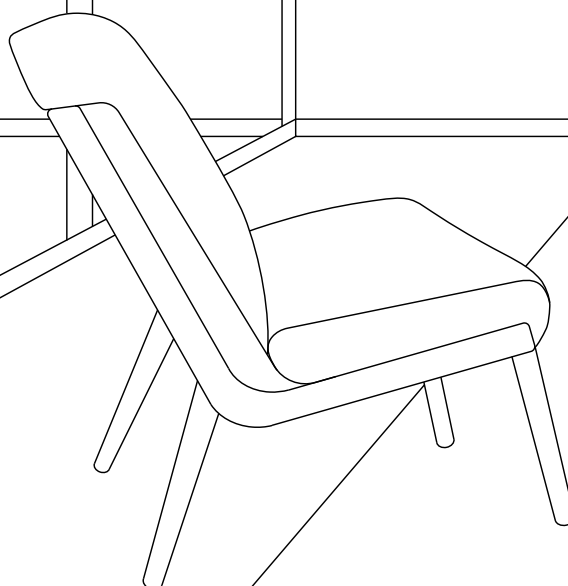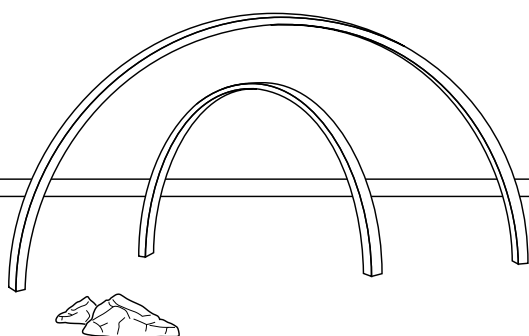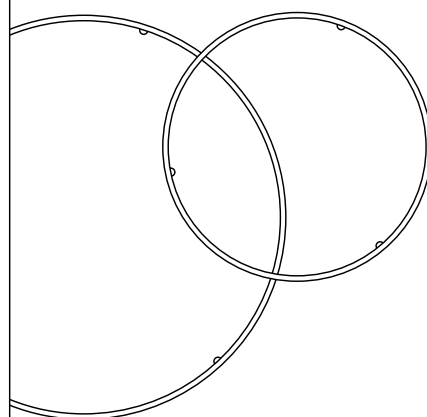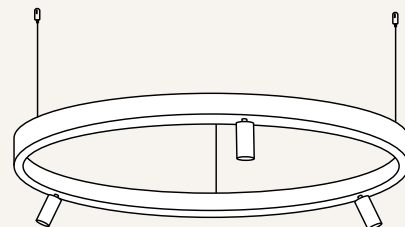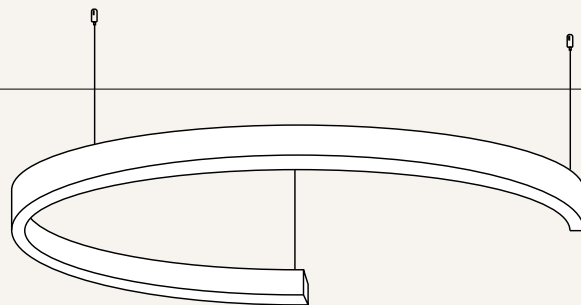

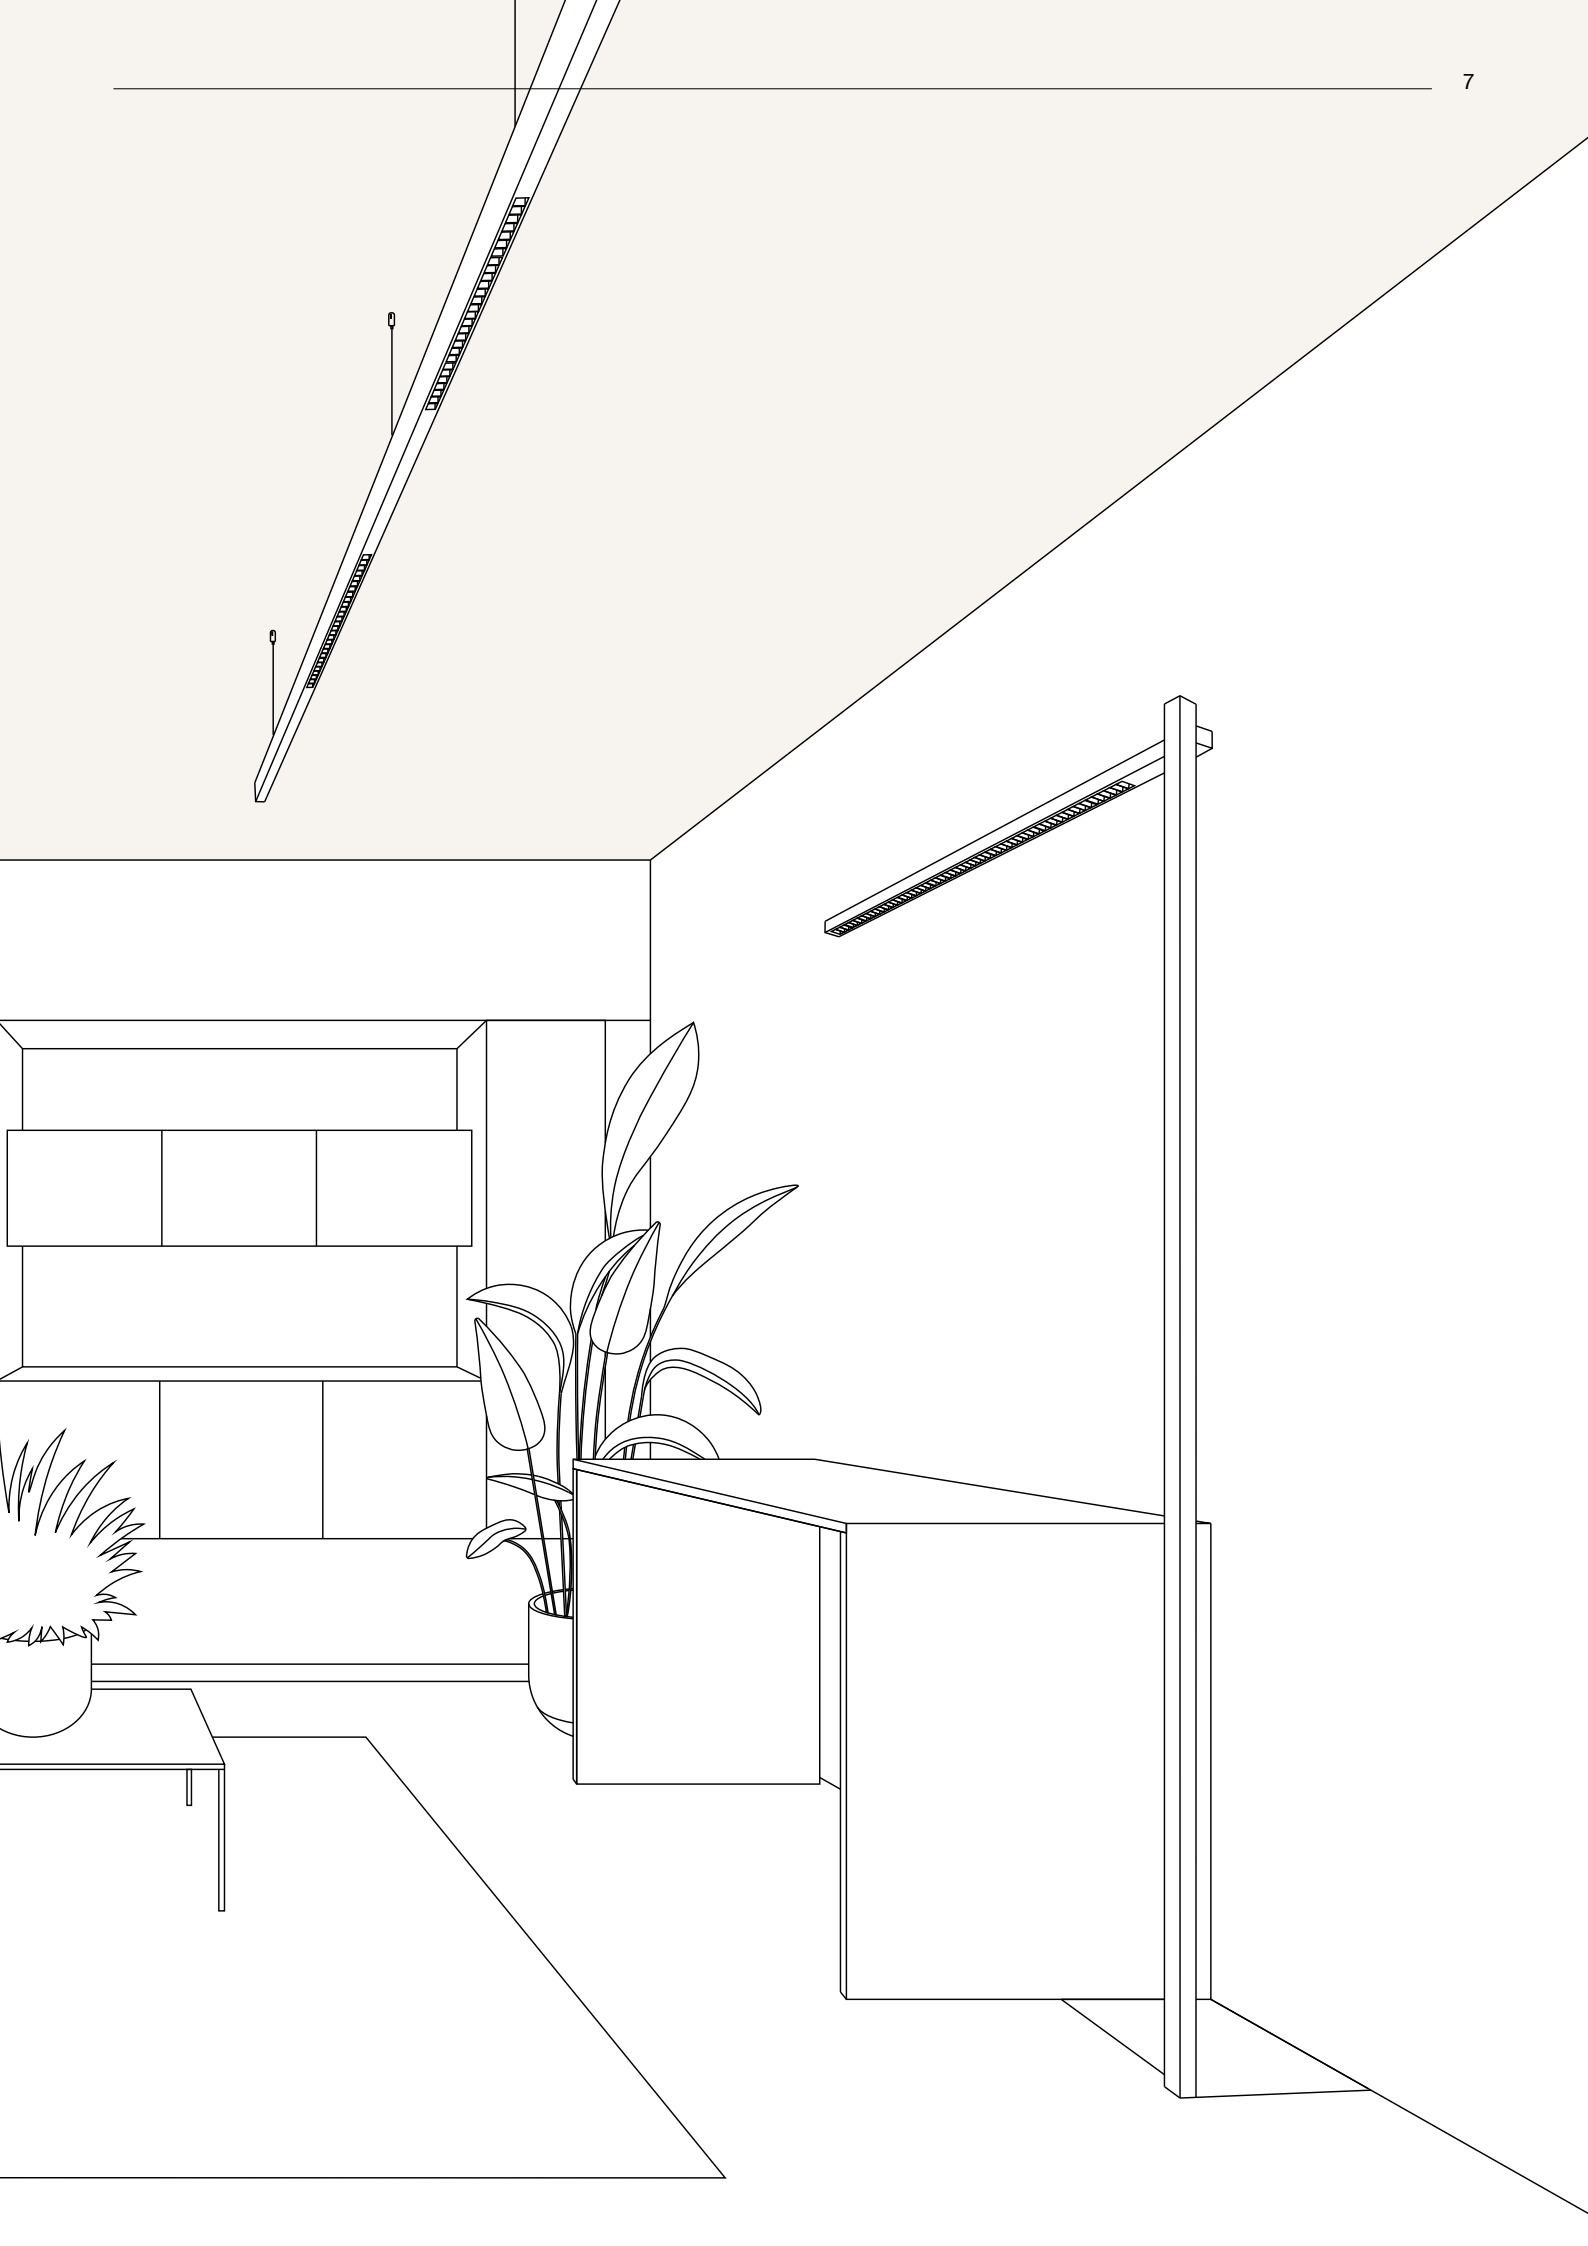


ZIRKOL

Shapes

The Zirkol collection offers a variety of shapes and sizes, perfectly adaptable to contexts with strong personality, allowing for the creation of unique and distinctive combinations.

La collezione Zirkol offre una varietà di forme e dimensioni, perfettamente adattabili a contesti con una forte personalità, permettendo di creare combinazioni uniche e distintive.



Circle




Gap




Round



Linear



Square S



Square Q



Oval



Custom




Zirkol Circle, black.
VITA DULCIS. "Paura e desiderio nell'Impero romano",
Palazzo delle Esposizioni, Rome

ZIRKOL

Shapes

dimensions in cm	60	85	100	150	200
------------------	----	----	-----	-----	-----

ZIRKOL CIRCLE p.40-63 / 76-82

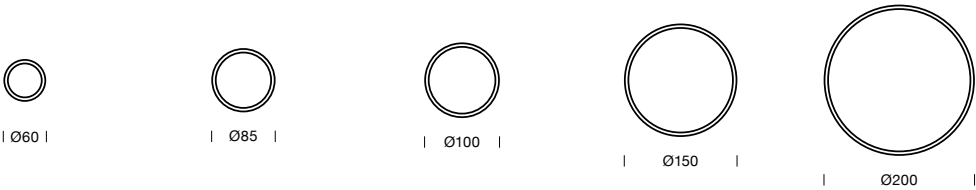


ZIRKOL GAP p.64-67





ZIRKOL ROUND p.68-73 / 83-84



ZIRKOL SIDE p.74-75




	300	500
--	-----	-----

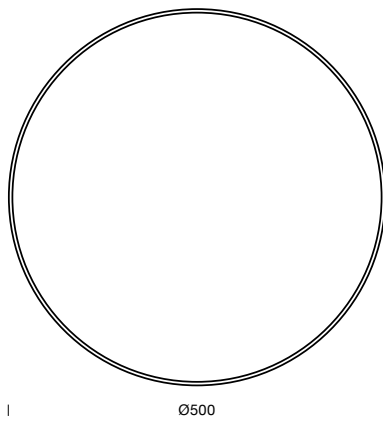


dimensions in cm	100	150	200	250	
------------------	-----	-----	-----	-----	--


ZIRKOL SQUARE-S p.86-89



ZIRKOL SQUARE-Q p.90-97

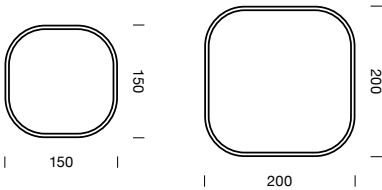





ZIRKOL OVAL p.98-105

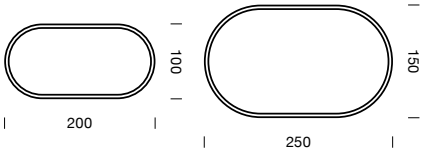

ZIRKOL LINEAR p.106-115



	300	350	400
--	-----	-----	-----



Lighting Options

Tipologie di Illuminazione


Light control and management options ensure maximum flexibility, supporting different color temperature settings.

La proposta di differenti temperature colore è coadiuvata dalle opzioni di controllo e gestione della luce che ne permettono un'ampia flessibilità di utilizzo.

CCT



2700K



3000K



4000K

LIGHTING OPTIONS / CUSTOM



DTW/Tunable White



RGB




RGBW

CIRCADIAN CYCLE / CUSTOM



Circadian rhythm synchronizes the correct correlated color temperature (CCT) with the sun, the ultimate natural light, improving the user's well-being.




Il ritmo circadiano sincronizza la corretta temperatura di colore correlata (CCT) con la luce naturale per eccellenza, il sole, migliorando il benessere dell'utente.





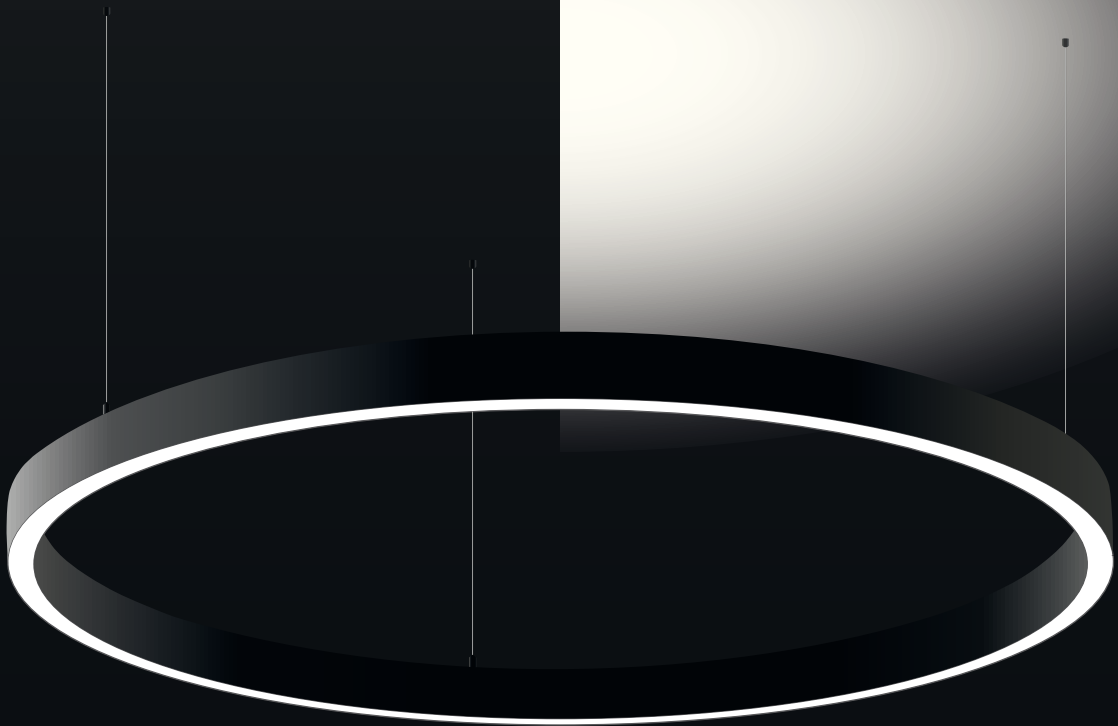

Diffused Downlight



Diffused Downlight + Uplight

Emission and UGR protection

Emissione e Protezione UGR


The product line offers three lighting options: **downlight, uplight, and up-downlight**. The control systems enable separate light management.

La famiglia è disponibile con tre opzioni di emissione: **downlight, uplight o up-downlight**. I sistemi di controllo permettono una gestione separata della luce.


LIGHT CONTROL



Direct only



Indirect only



Direct + Indirect

UGR


The UGR lens is ideal for applications requiring efficient yet subtle lighting, significantly reducing glare.



L'uso della lente UGR è ideale per applicazioni che richiedono un'illuminazione efficiente ma discreta, caratterizzata da una significativa riduzione dell'abbagliamento.



UGR (visual protection)

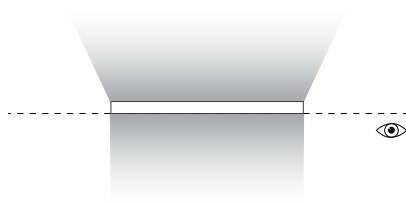

UGR (visual protection) + Uplight



UGR<19


Form follows function

La Forma segue la funzione

The Zirkol range showcases its versatility through an array of lines, curves, and closed shapes. The ability to combine these elements enables highly customized solutions.

La versatilità della gamma Zirkol si esprime attraverso un'ampia varietà di linee, curve e forme chiuse. La possibilità di combinare gli elementi consente inoltre di creare soluzioni altamente personalizzate.

MODULAR SHAPES FOR CUSTOM SOLUTIONS

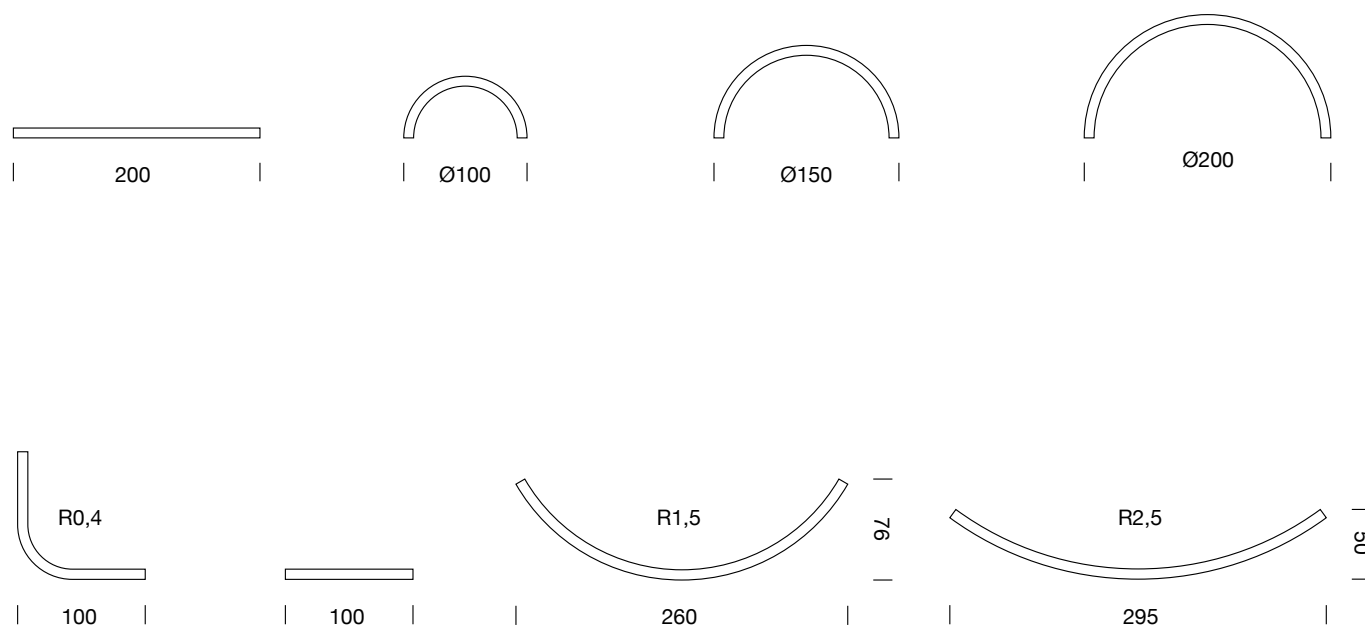


MECHANICAL JOINT

Segments of varying lengths and curvatures are connected using pre-wired joints, allowing for the creation of customized geometries.

I segmenti di diversa lunghezza e curvatura vengono uniti tramite giunti precablati, per ottenere geometrie personalizzate.



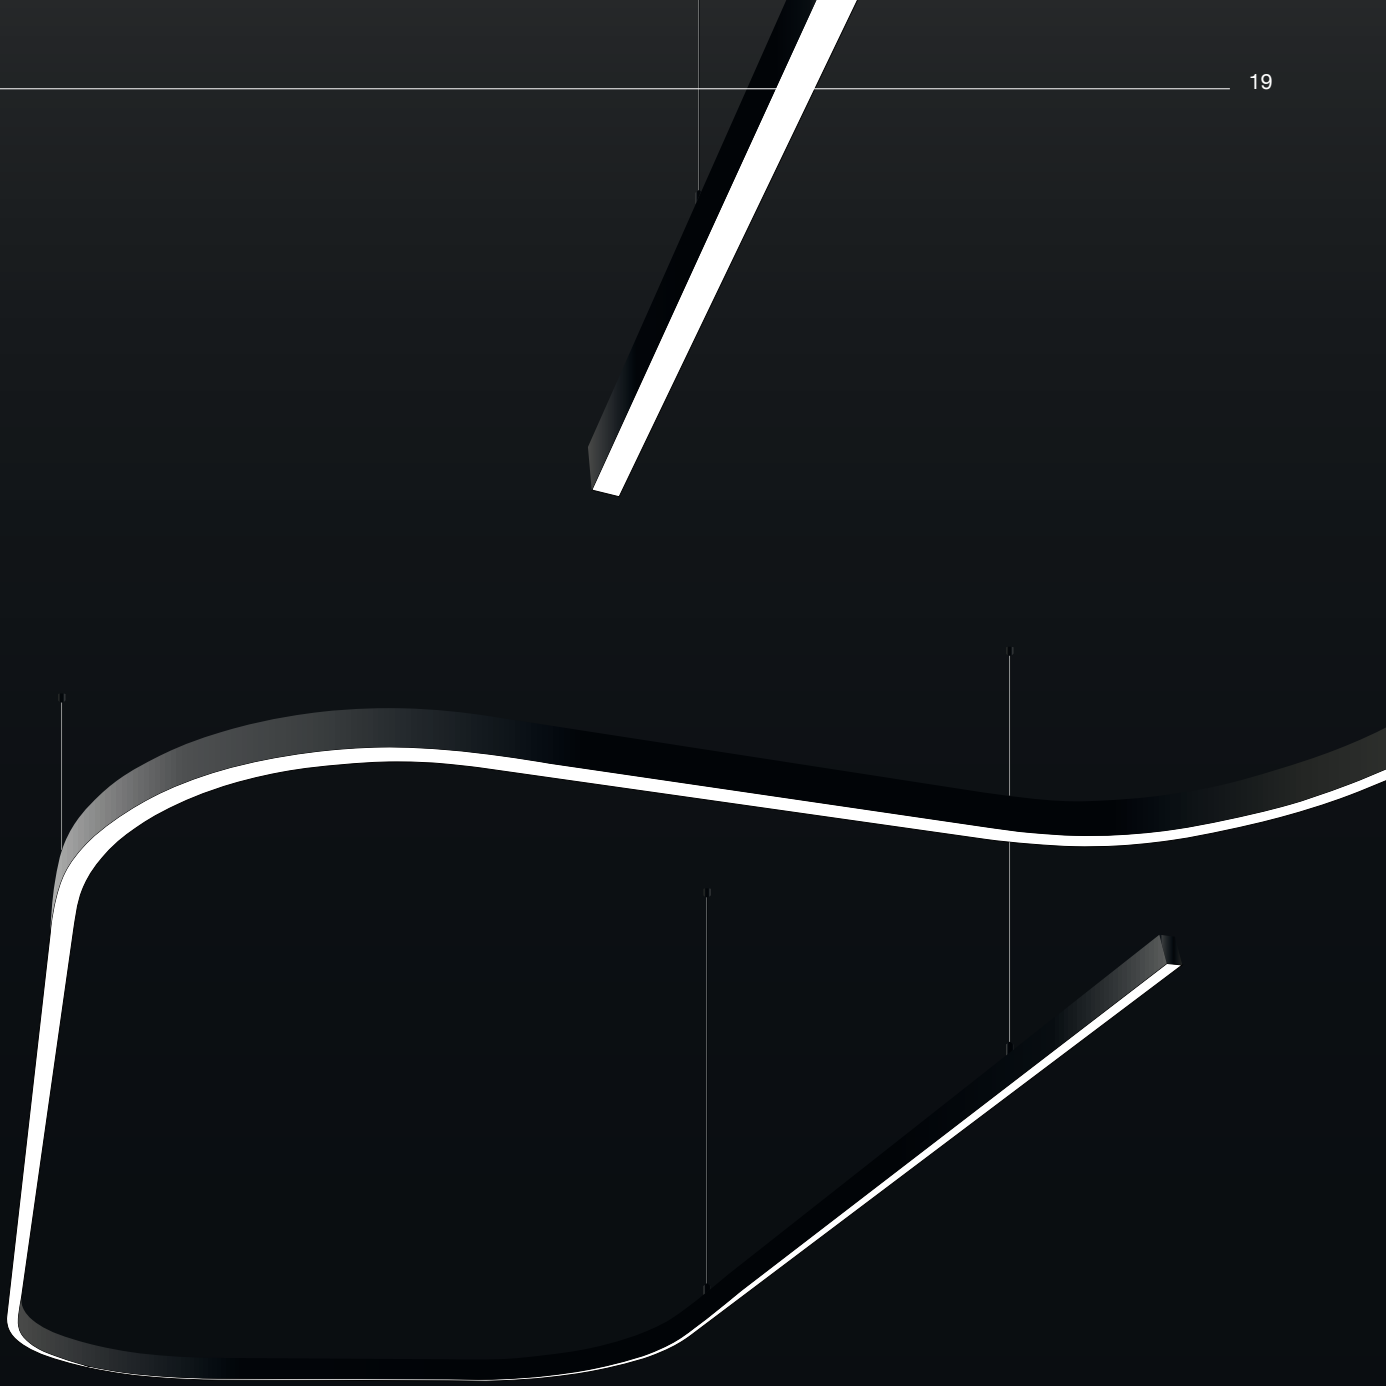

Control Systems

Sistemi di Controllo

The Zirkol range is completed with a wide selection of control systems, providing the perfect solution for every application need.

La gamma Zirkol si completa con una vasta proposta di sistemi di controllo, offrendo la soluzione ideale per ogni necessità applicativa.

CONTROL SYSTEMS



ON/OFF



1-10V



DALI



TRIAC



CASAMBI



DMX/RDM

CONTROL SYSTEMS / **CUSTOM**



EMERGENCY KIT




ON/OFF


TRIAC



1 - 10 V

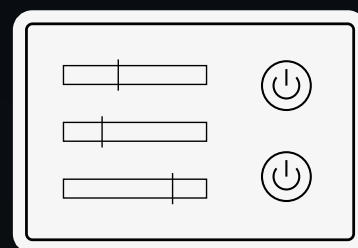

DALI




CASAMBI


Endless possibilities

Infinita possibilità

The unique profile of Zirkol allows for a high level of customization, enabling the creation of innovative solutions. It supports the integration of spotlights, electrified tracks, rigid/sound-absorbing panels, or UGR lenses.

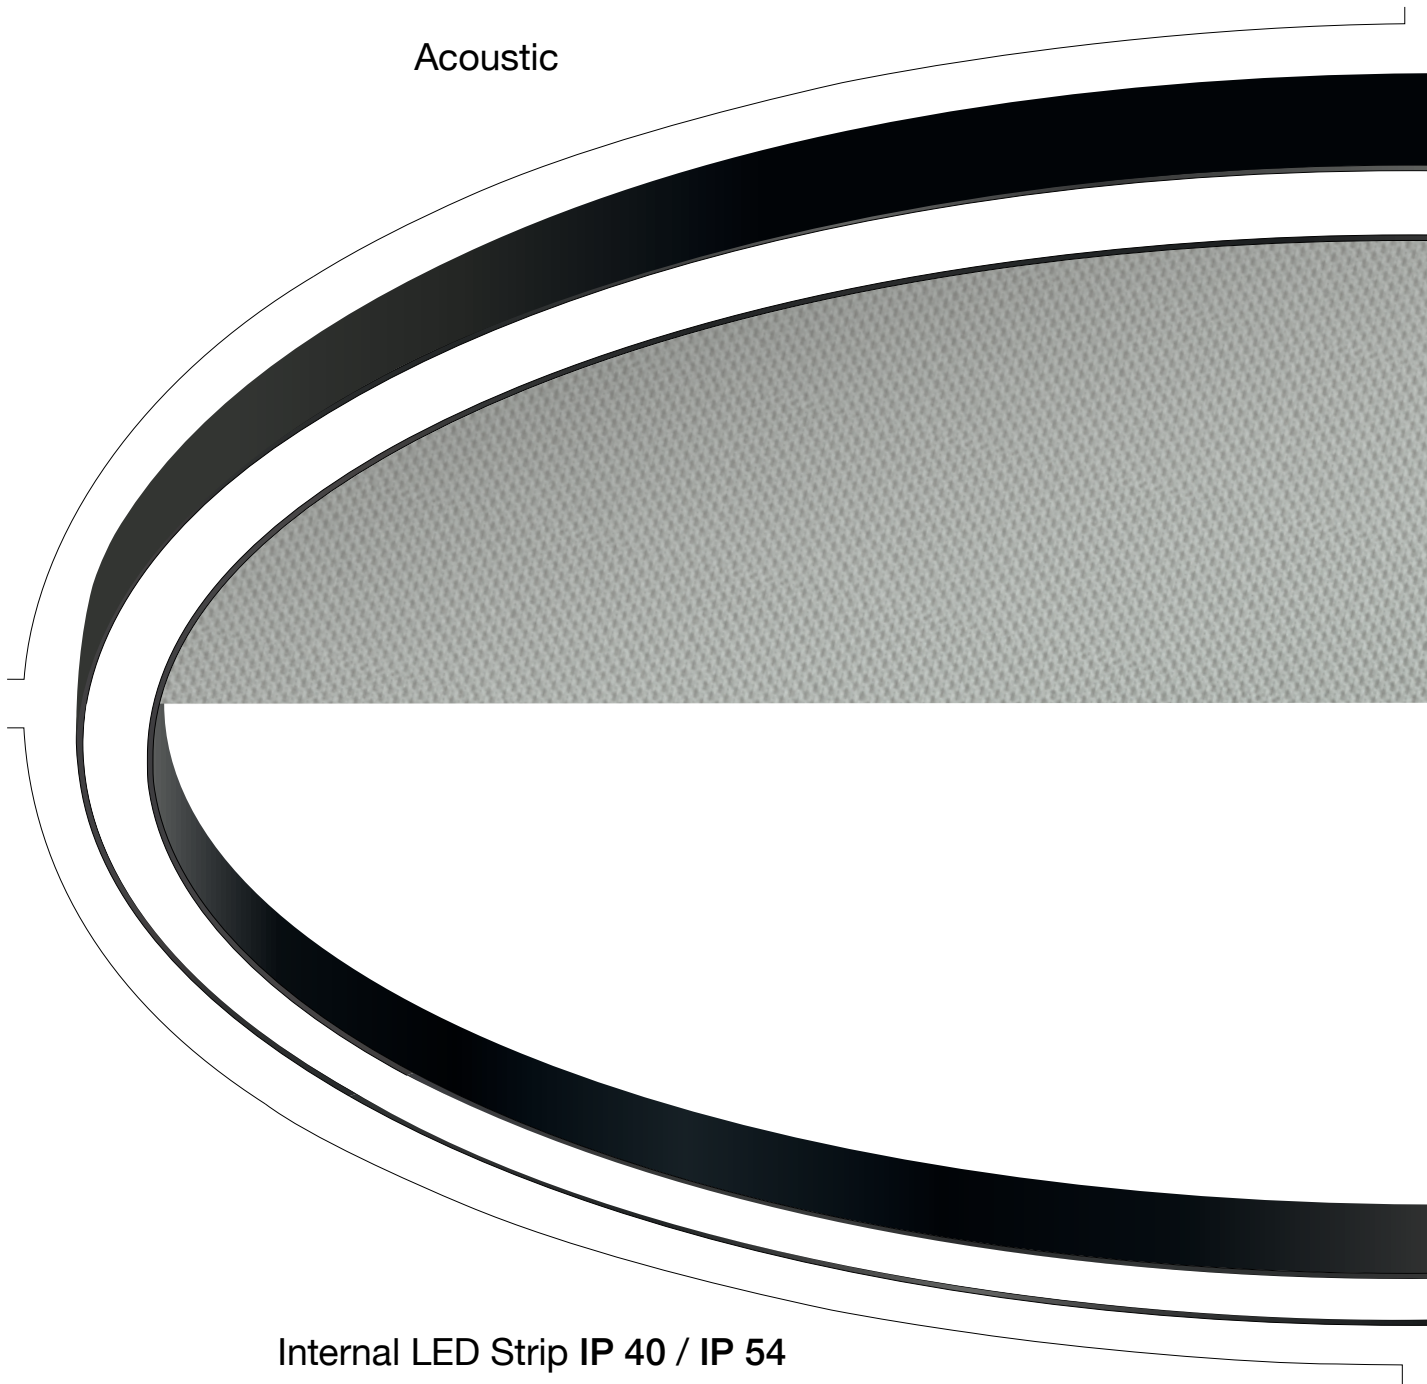

L'unicità del profilo consente un elevato livello di personalizzazione, per creare sempre nuove soluzioni. È possibile integrare faretti, binari elettrificati, pannelli rigidi/ fonoassorbenti o lenti UGR.

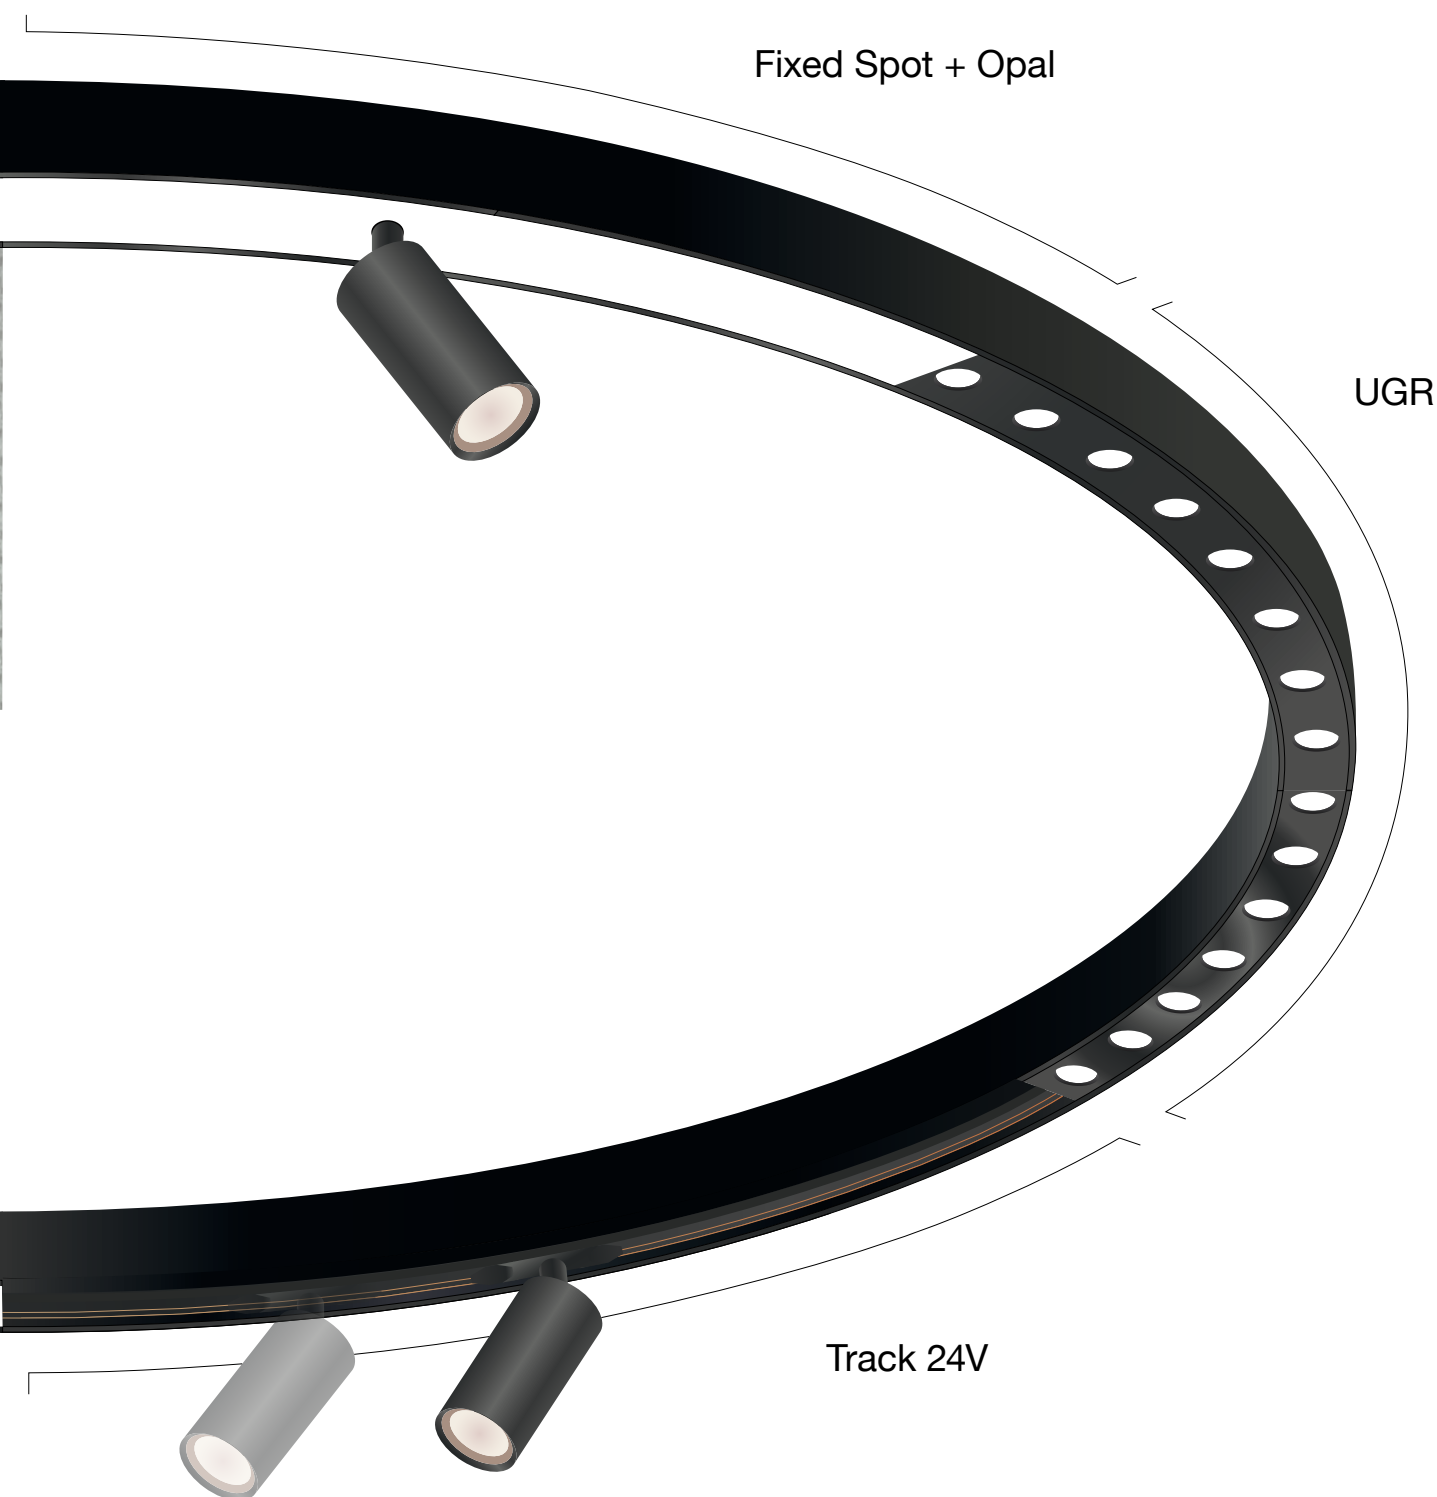

*The image shows the different options and does not represent a configurable existing product.



Zirkol Outdoor, black.
Casa Y, Turin

Zirkol Outdoor

Zirkol per esterni

Zirkol is available in IP54 and IP65 versions, making it suitable for outdoor applications, enhancing courtyards and pathways with its distinctive design.


Disponibile nelle versioni con IP54 e IP65, Zirkol è adatto anche per applicazioni outdoor, caratterizzando cortili e percorsi con il suo design distintivo.

LIGHT EMISSION



Available with **IP 54** or **IP 65**

Zirkol Circle LED strip **IP 54**

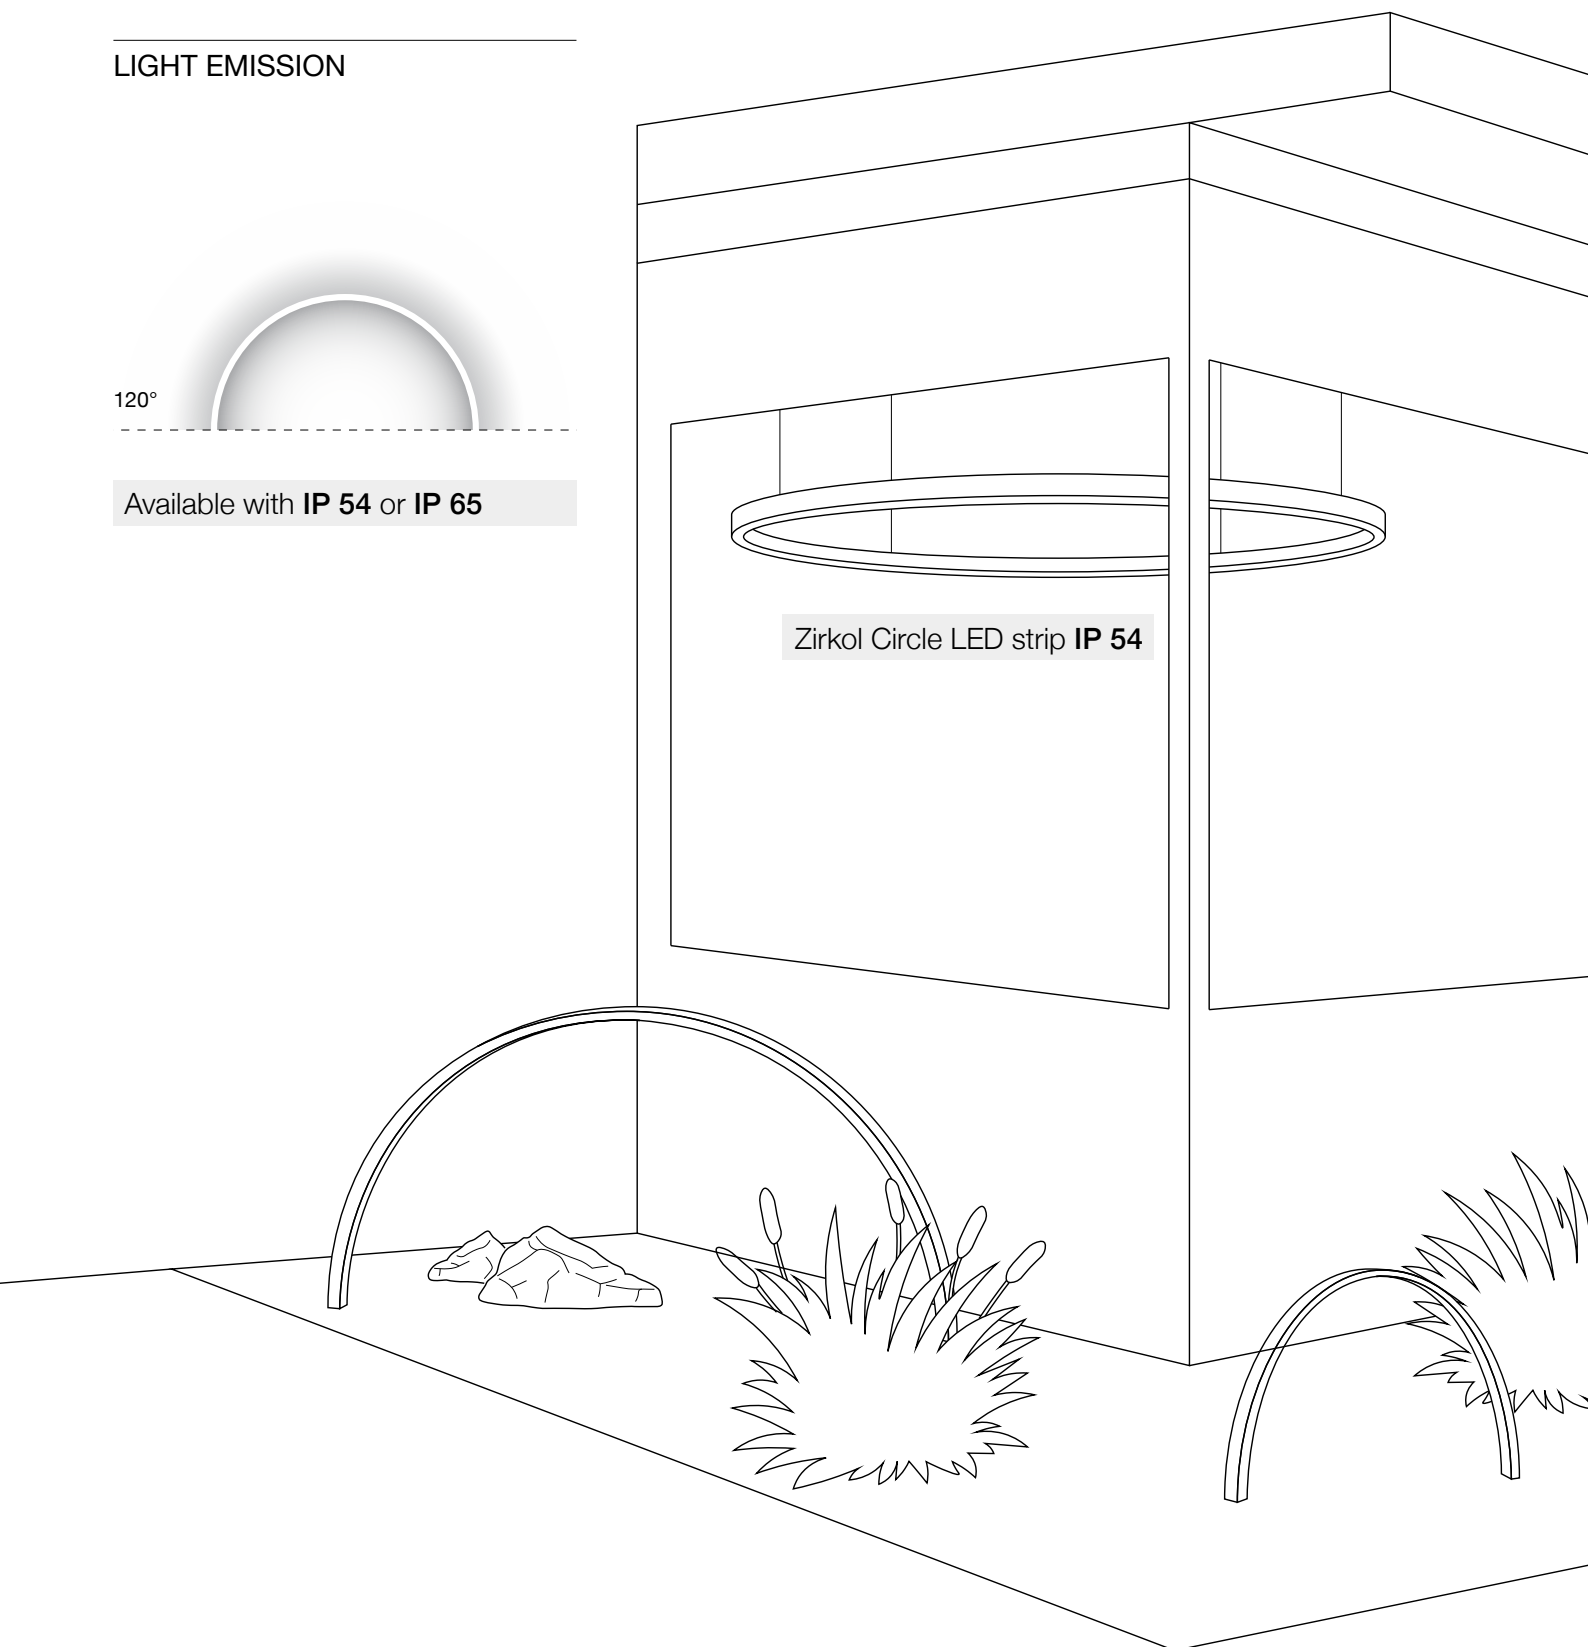


Integrated Driver


Driver Integrato

The range offers the option to integrate the driver, simplifying installation even on concrete ceilings. All lamps come with either a ceiling rose or a driver box compatible with the selected power supply.

Zirkol prevede la possibilità di integrare il driver, consentendo un'installazione semplice e immediata, anche su soffitti in cemento. Tutte le lampade sono disponibili con rosone o driver box compatibili con l'alimentatore scelto.

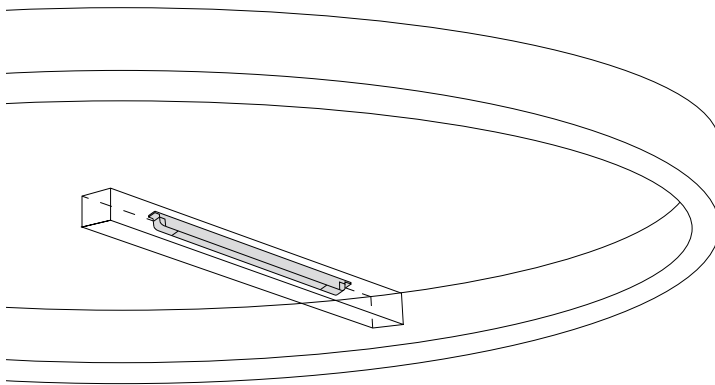

DALI

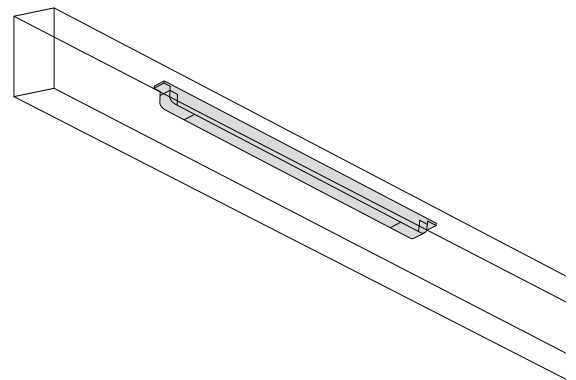


ON/OFF

ACCESSORIES FOR DRIVER


Drivers can be housed within the ceiling rose or dedicated boxes.




I driver possono essere contenuti all'interno del rosone o in box dedicati.

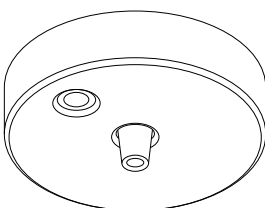

Ceiling Driver Plate



Driver Box

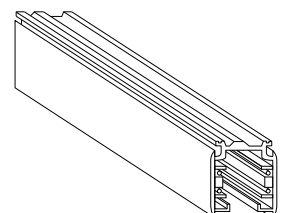

Track 3C-230V





Zirkol assembly, black.
ILTI Luce, Turin



Zirkol assembly, black.
ILTI Luce, Turin

Inside the Zirkol

Dentro lo Zirkol


The symmetrical profile and continuous LED strip application ensure particularly uniform light emission, enhanced by a dedicated opal screen.

La simmetria del profilo e l'applicazione della strip LED in modo continuativo, consentono di ottenere un'emissione luminosa particolarmente omogenea grazie all'utilizzo di uno schermo opalino dedicato.


Light's homogeneity is provided by the continuous LED strip that is applied on the side of the profile.

L'uniformità della luce è legata alla striscia LED continua, poichè applicata sul lato del profilo.


LED STRIP



Selected CCT / DTW



Tunable White



RGB / RGBW

JOINT COVER



No light dispersion occurs between the joints of the elements.

Assenza di dispersione luminosa tra le giunzioni degli elementi.

Finishes

Finiture

The four available finishes seamlessly adapt to any environment, providing a sophisticated aesthetic.

Le quattro finiture proposte si adattano perfettamente a qualsiasi ambiente, garantendo un'estetica sofisticata in ogni contesto.

ALUMINUM



Black



White



Gold



Brushed

RAL / CUSTOM

Customized versions can be created upon request by specifying a RAL color.

Su richiesta, possono essere fornite versioni personalizzate fornendo il RAL specifico.






Zirkol Circle, gold.
Private project, Manchester

Shape your ZIRKOL CUSTOM

ZIRKOL



L1



L2


ZIRKOL



D1




D1,5




D2


ZIRKOL




R0,4



R1,5




R2,5




Configure your custom solution online on our platform

Configura online la tua soluzione personalizzata sulla nostra piattaforma


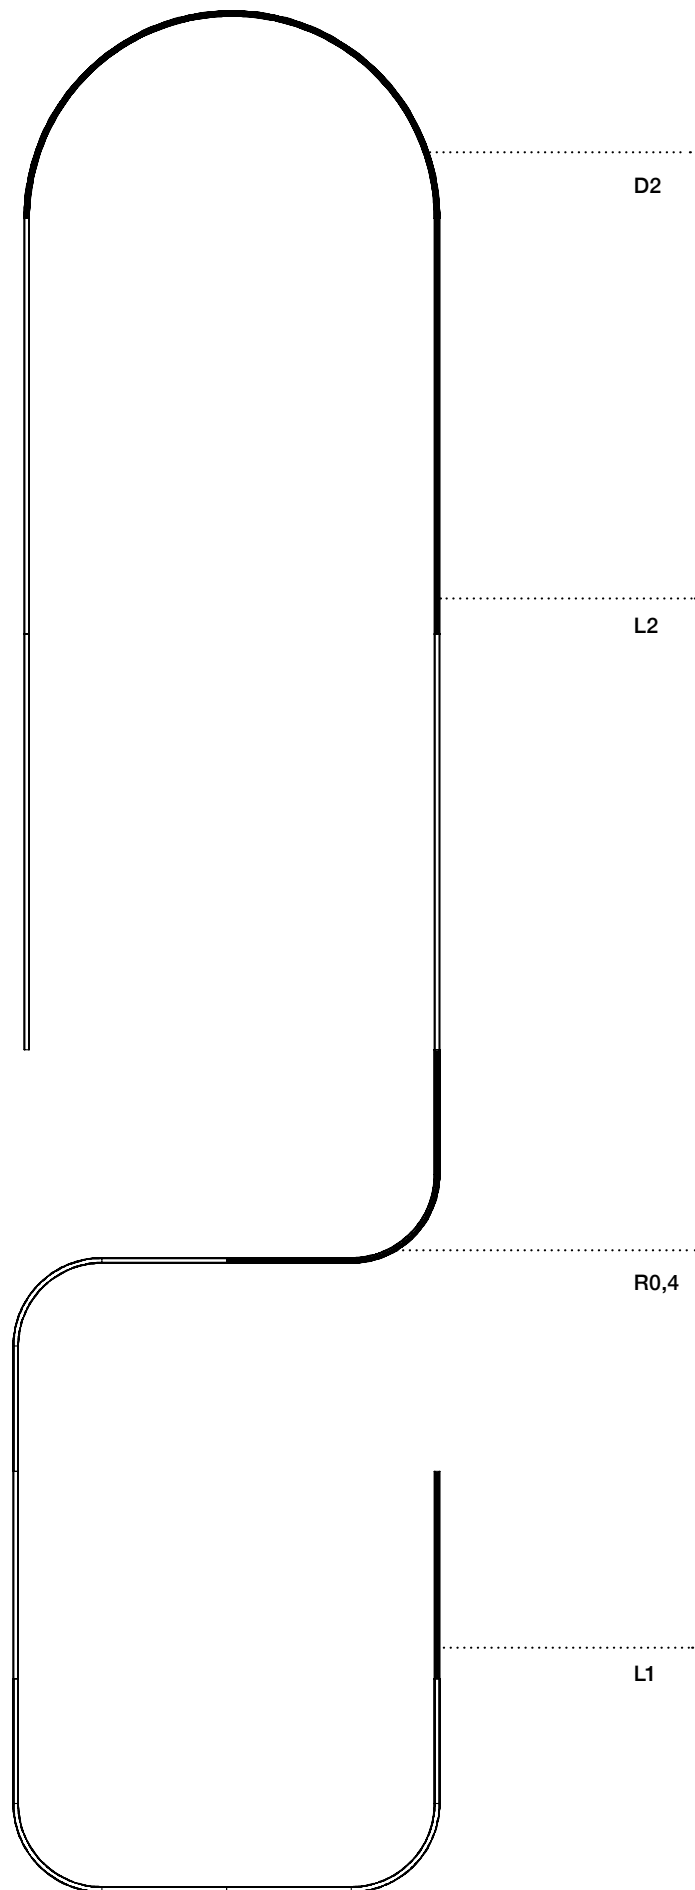



EXAMPLE OF A FEASIBLE CUSTOM ZIRKOL SHAPE

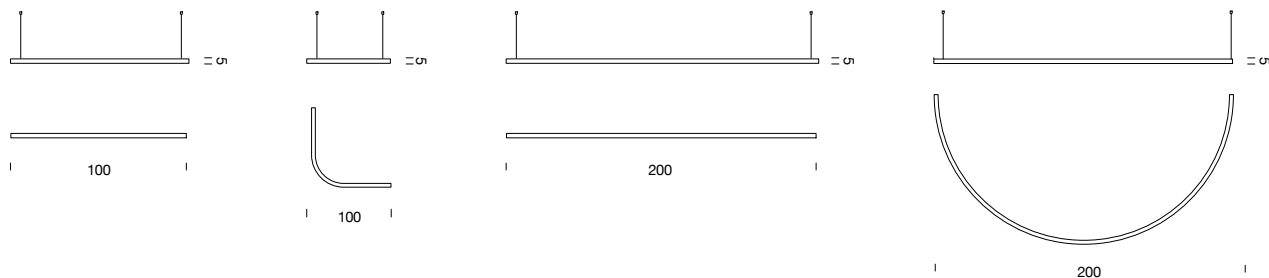

CCT 4000K | 303W | 20904 lm
structure gold


Linear LED | diffused | typ cri 90 | DALI 1-100%
canopy 1 driver - electrical cable length 5m |
adjustable metal cable length 3m | dimmer interface |
ceiling attachments

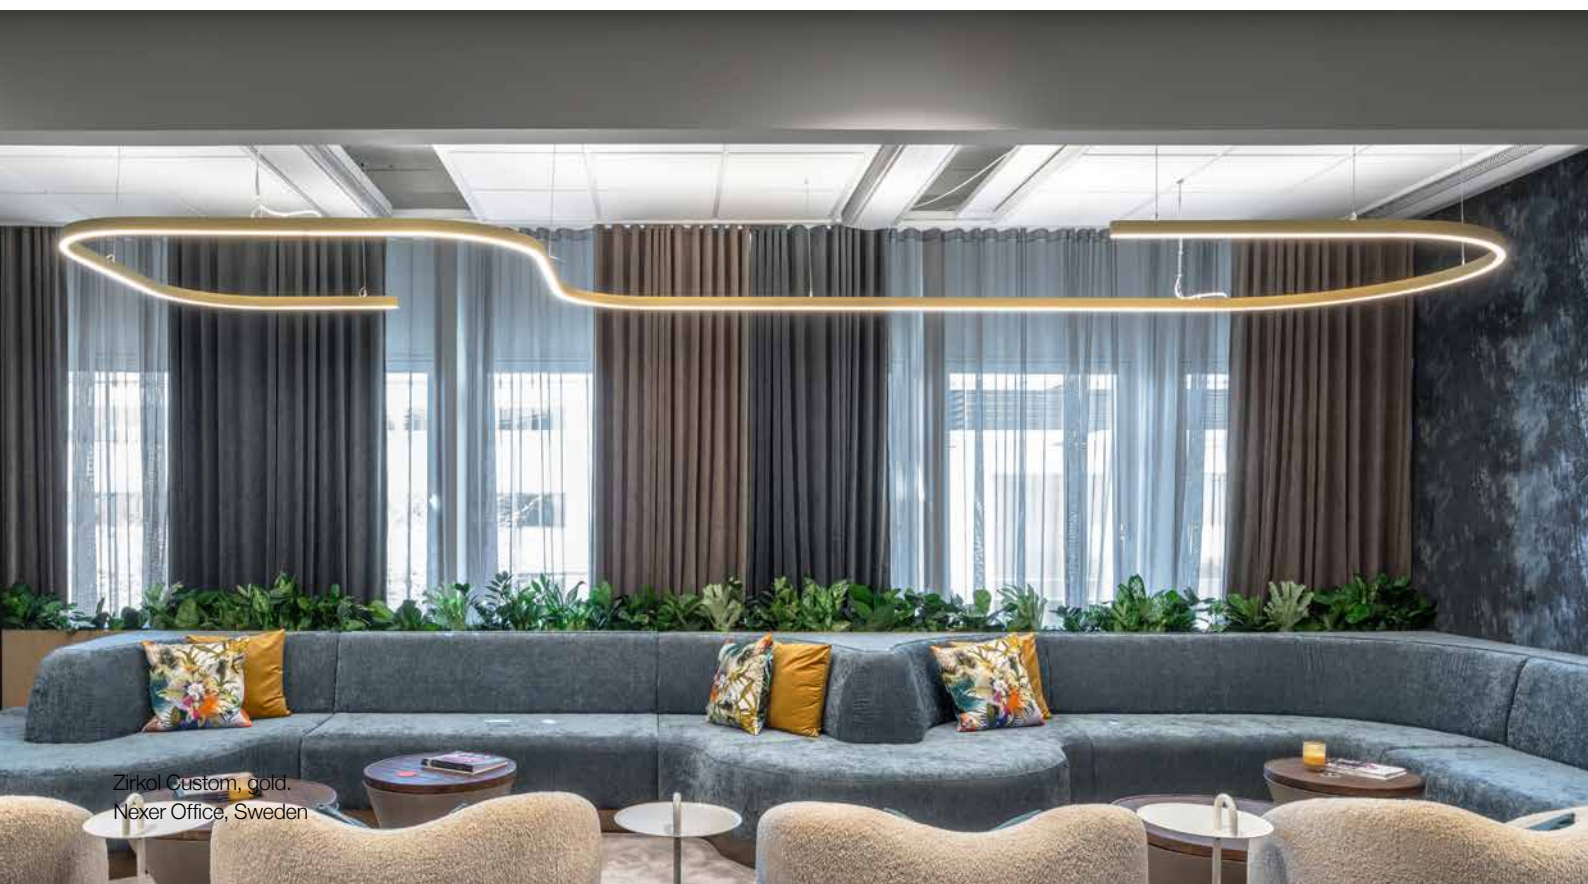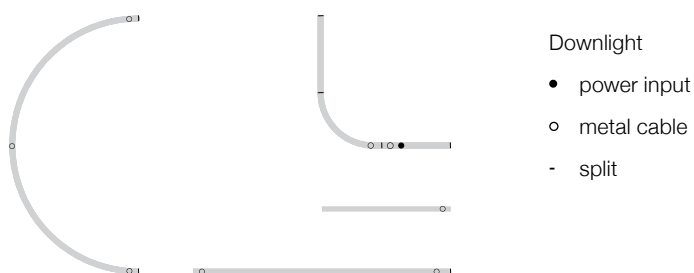

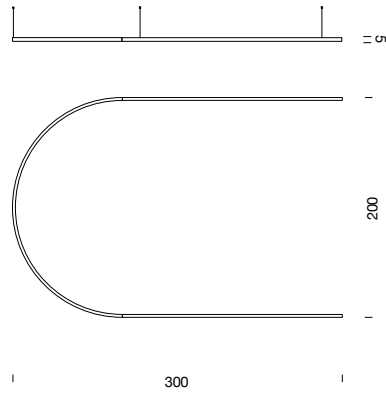

Up-downlight

- power input
- metal cable
- split

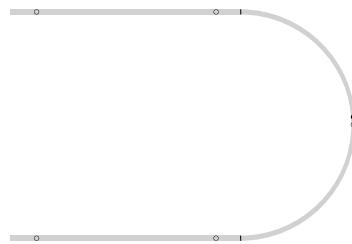


CCT 2700K | 210W | 12600 lm
structure gold

Linear LED | diffused | typ cri 90 | DALI 1-100%
canopy 1 driver - electrical cable length 5m |
adjustable metal cable length 3m | dimmer interface |
ceiling attachments



Zirkol Custom 2xL2+D2, gold.
Private project, Lyon

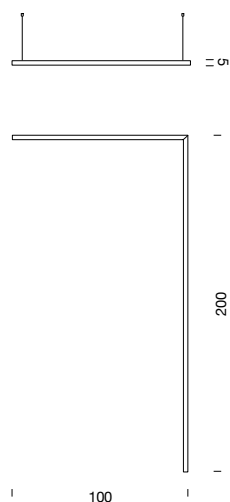


CCT 4000K | 45W | 2700 lm
structure white

Linear LED | diffused | typ cri 90 | DALI 1-100%
ceiling plate for remote driver - electrical cable length
5m | adjustable metal cable length 3m | remote driver |
dimmer interface | shipped assembled



Downlight


- power input
- metal cable

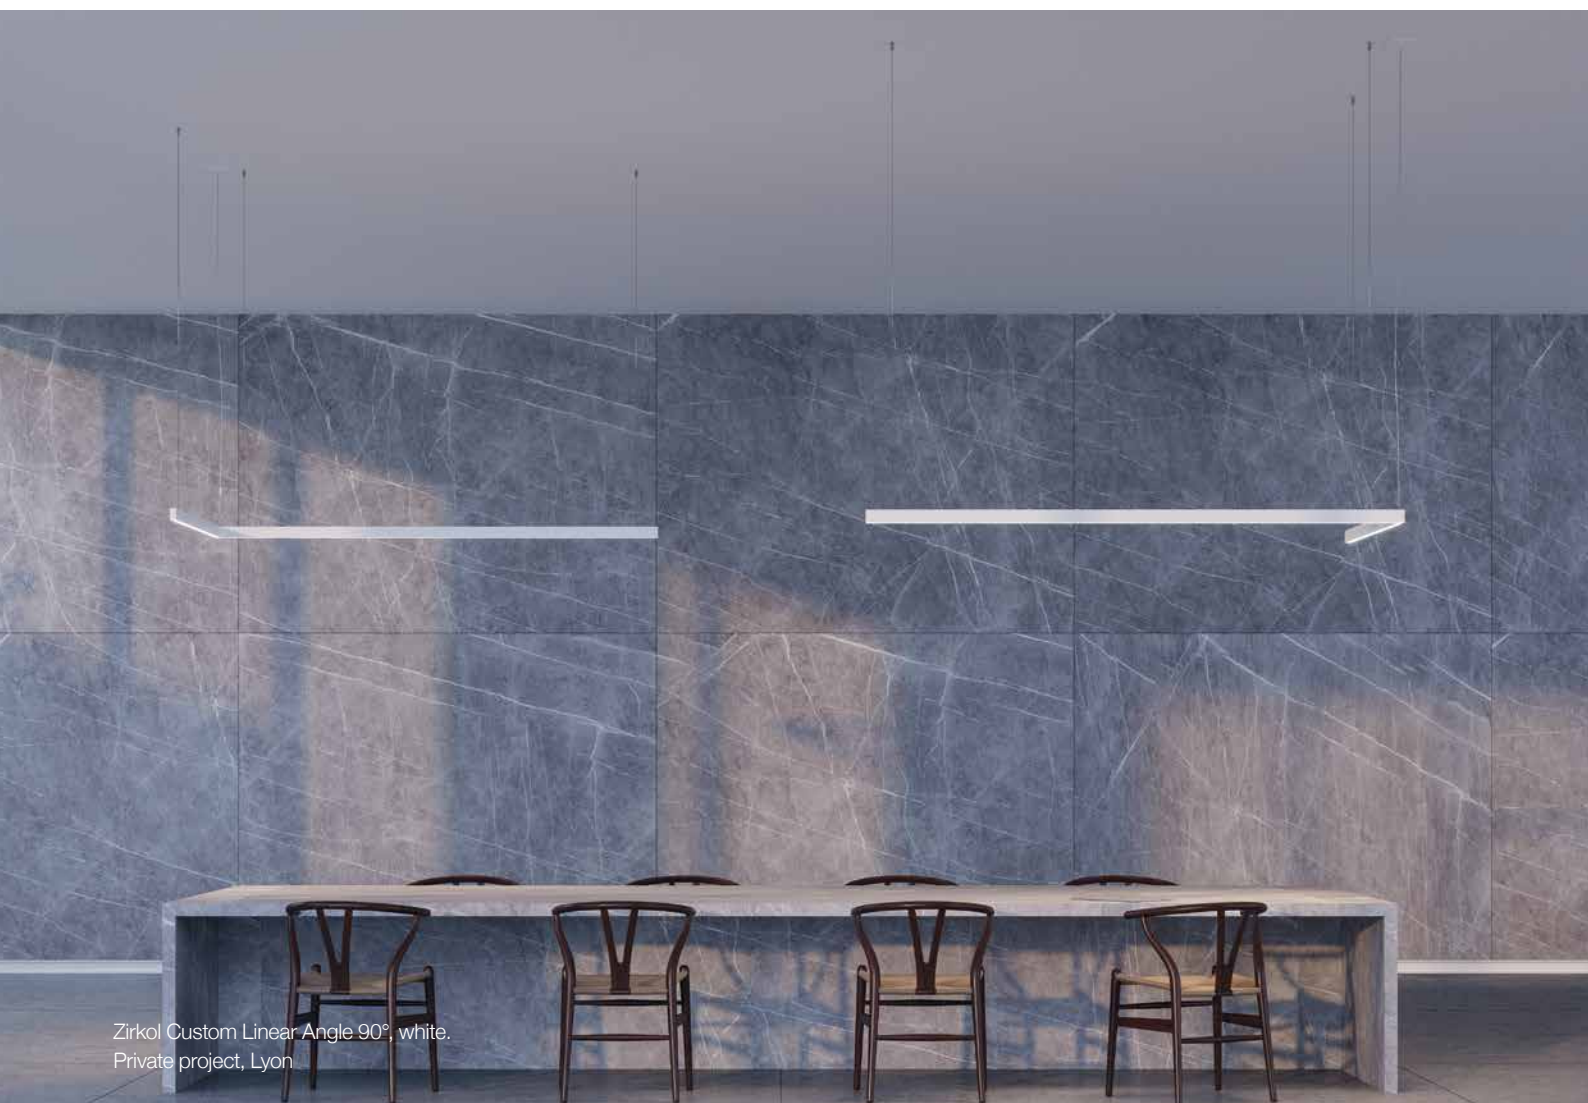

Zirkol Custom Linear Angle 90°, white.
Private project, Lyon.




Zirkol Custom, white.
Domal Showroom, Milan

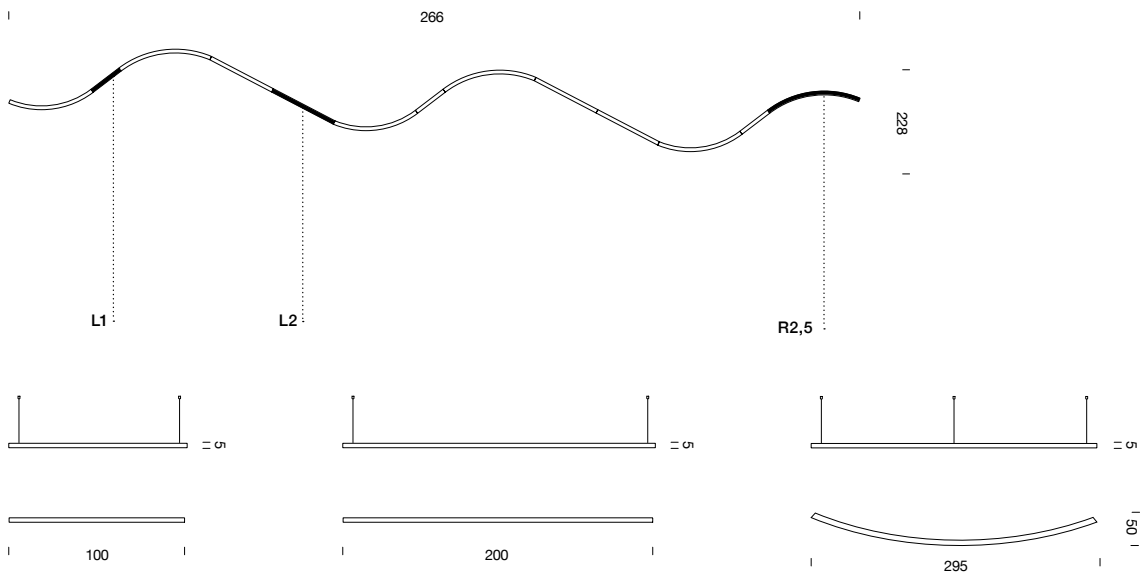

Downlight

- power input
- metal cable
- split



CCT 3000K | 435W | 265351 lm
structure white

Linear LED | diffused | typ cri 90 | DALI 1-100%
ceiling plate for remote driver - electrical cable length
5m | adjustable metal cable length 3m | remote driver |
dimmer interface | ceiling attachment



LE VIN MYSTÈRE

Vous découvrez
L'appellation
le cépage
le millieu
la bouteille
offerte
12




Zirkol Custom 2xL2+D2, gold.
Galerie Lafayette Haussmann, Paris

Pendant


Zirkol Home Circle

Ideal for residential settings, Zirkol Home Circle strikes the perfect balance between practicality, design, and high-lighting performance.

Perfetto per un'installazione residenziale, Zirkol Home Circle rappresenta il giusto compromesso fra praticità, design ed elevate prestazioni di illuminazione.



remote driver installation



downlight/up-downlight

- power input
- metal cable

aluminium
structure profile

ZIRKOL HOME - CIRCLE 0,85m | TRIAC

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	35W	LED strip	24V	2000lm	90	TRIAC	BZRC2708G15DBO	white	○
2700K	35W	LED strip	24V	2000lm	90	TRIAC	BZRC2708G15DNE	black	●
2700K	35W	LED strip	24V	2000lm	90	TRIAC	BZRC2708G15DOR	gold	●
3000K	35W	LED strip	24V	2200lm	90	TRIAC	BZRC2708G15WBO	white	○
3000K	35W	LED strip	24V	2200lm	90	TRIAC	BZRC2708G15WNE	black	●
3000K	35W	LED strip	24V	2200lm	90	TRIAC	BZRC2708G15WOR	gold	●
4000K	35W	LED strip	24V	2360lm	90	TRIAC	BZRC2708G15NBO	white	○
4000K	35W	LED strip	24V	2360lm	90	TRIAC	BZRC2708G15NNE	black	●
4000K	35W	LED strip	24V	2360lm	90	TRIAC	BZRC2708G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x electrical cable 4m 3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	70W	LED strip	24V	4000lm	90	TRIAC	BZRC2808G15DBO	white	○
2700K	70W	LED strip	24V	4000lm	90	TRIAC	BZRC2808G15DNE	black	●
2700K	70W	LED strip	24V	4000lm	90	TRIAC	BZRC2808G15DOR	gold	●
3000K	70W	LED strip	24V	4400lm	90	TRIAC	BZRC2808G15WBO	white	○
3000K	70W	LED strip	24V	4400lm	90	TRIAC	BZRC2808G15WNE	black	●
3000K	70W	LED strip	24V	4400lm	90	TRIAC	BZRC2808G15WOR	gold	●
4000K	70W	LED strip	24V	4720lm	90	TRIAC	BZRC2808G15NBO	white	○
4000K	70W	LED strip	24V	4720lm	90	TRIAC	BZRC2808G15NNE	black	●
4000K	70W	LED strip	24V	4720lm	90	TRIAC	BZRC2808G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x electrical cable 4m 3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

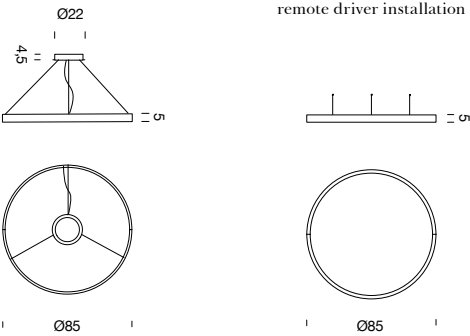

downlight/up-downlight

- power input
- metal cable



aluminium
structure profile

ZIRKOL HOME - CIRCLE 0,85m | CASAMBI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	35W	LED strip	24V	2000lm	90	CASAMBI	BZRC3308G15DBO	white	○
2700K	35W	LED strip	24V	2000lm	90	CASAMBI	BZRC3308G15DNE	black	●
2700K	35W	LED strip	24V	2000lm	90	CASAMBI	BZRC3308G15DOR	gold	●
3000K	35W	LED strip	24V	2200lm	90	CASAMBI	BZRC3308G15WBO	white	○
3000K	35W	LED strip	24V	2200lm	90	CASAMBI	BZRC3308G15WNE	black	●
3000K	35W	LED strip	24V	2200lm	90	CASAMBI	BZRC3308G15WOR	gold	●
4000K	35W	LED strip	24V	2360lm	90	CASAMBI	BZRC3308G15NBO	white	○
4000K	35W	LED strip	24V	2360lm	90	CASAMBI	BZRC3308G15NNE	black	●
4000K	35W	LED strip	24V	2360lm	90	CASAMBI	BZRC3308G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer CASAMBI 1 x electrical cable 4m 3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	70W	LED strip	24V	4000lm	90	CASAMBI	BZRC3408G15DBO	white	○
2700K	70W	LED strip	24V	4000lm	90	CASAMBI	BZRC3408G15DNE	black	●
2700K	70W	LED strip	24V	4000lm	90	CASAMBI	BZRC3408G15DOR	gold	●
3000K	70W	LED strip	24V	4400lm	90	CASAMBI	BZRC3408G15WBO	white	○
3000K	70W	LED strip	24V	4400lm	90	CASAMBI	BZRC3408G15WNE	black	●
3000K	70W	LED strip	24V	4400lm	90	CASAMBI	BZRC3408G15WOR	gold	●
4000K	70W	LED strip	24V	4720lm	90	CASAMBI	BZRC3408G15NBO	white	○
4000K	70W	LED strip	24V	4720lm	90	CASAMBI	BZRC3408G15NNE	black	●
4000K	70W	LED strip	24V	4720lm	90	CASAMBI	BZRC3408G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer CASAMBI 1 x electrical cable 4m 3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

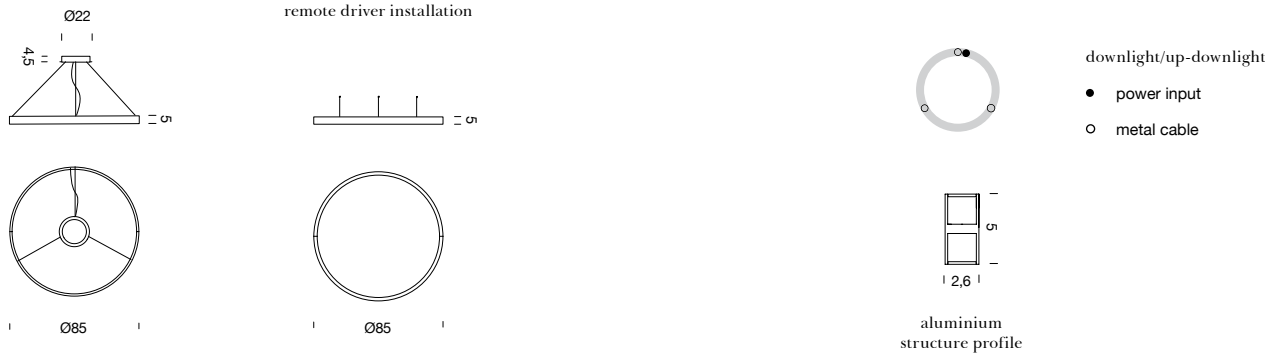

ZIRKOL HOME - CIRCLE 0,85m | DALI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	35W	LED strip	24V	2000lm	90	DALI	BZRC1608G15DBO	white	○
2700K	35W	LED strip	24V	2000lm	90	DALI	BZRC1608G15DNE	black	●
2700K	35W	LED strip	24V	2000lm	90	DALI	BZRC1608G15DOR	gold	●
3000K	35W	LED strip	24V	2200lm	90	DALI	BZRC1608G15WBO	white	○
3000K	35W	LED strip	24V	2200lm	90	DALI	BZRC1608G15WNE	black	●
3000K	35W	LED strip	24V	2200lm	90	DALI	BZRC1608G15WOR	gold	●
4000K	35W	LED strip	24V	2360lm	90	DALI	BZRC1608G15NBO	white	○
4000K	35W	LED strip	24V	2360lm	90	DALI	BZRC1608G15NNE	black	●
4000K	35W	LED strip	24V	2360lm	90	DALI	BZRC1608G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	70W	LED strip	24V	4000lm	90	DALI	BZRC1708G15DBO	white	○
2700K	70W	LED strip	24V	4000lm	90	DALI	BZRC1708G15DNE	black	●
2700K	70W	LED strip	24V	4000lm	90	DALI	BZRC1708G15DOR	gold	●
3000K	70W	LED strip	24V	4400lm	90	DALI	BZRC1708G15WBO	white	○
3000K	70W	LED strip	24V	4400lm	90	DALI	BZRC1708G15WNE	black	●
3000K	70W	LED strip	24V	4400lm	90	DALI	BZRC1708G15WOR	gold	●
4000K	70W	LED strip	24V	4720lm	90	DALI	BZRC1708G15NBO	white	○
4000K	70W	LED strip	24V	4720lm	90	DALI	BZRC1708G15NNE	black	●
4000K	70W	LED strip	24V	4720lm	90	DALI	BZRC1708G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

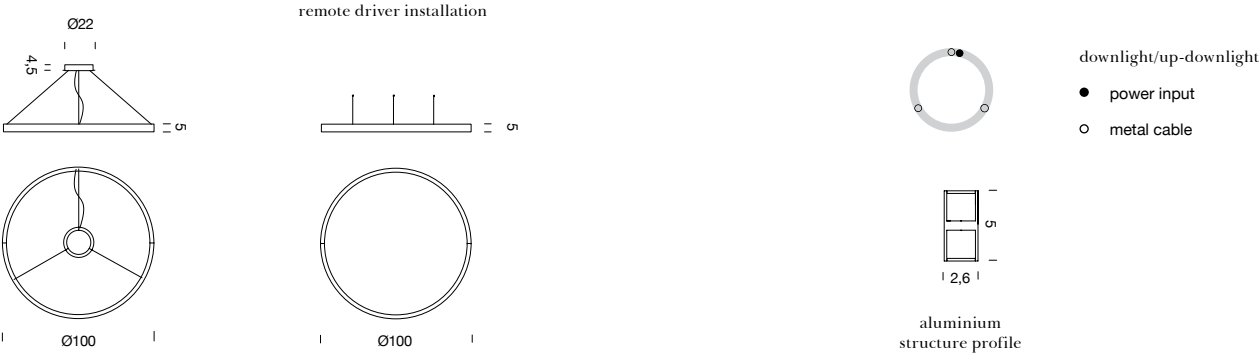

ZIRKOL HOME - CIRCLE 1m | TRIAC

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	45W	LED strip	24V	2616lm	90	TRIAC	BZRC2710G15DBO	white	○
2700K	45W	LED strip	24V	2616lm	90	TRIAC	BZRC2710G15DNE	black	●
2700K	45W	LED strip	24V	2616lm	90	TRIAC	BZRC2710G15DOR	gold	●
3000K	45W	LED strip	24V	2769lm	90	TRIAC	BZRC2710G15WBO	white	○
3000K	45W	LED strip	24V	2769lm	90	TRIAC	BZRC2710G15WNE	black	●
3000K	45W	LED strip	24V	2769lm	90	TRIAC	BZRC2710G15WOR	gold	●
4000K	45W	LED strip	24V	3077lm	90	TRIAC	BZRC2710G15NBO	white	○
4000K	45W	LED strip	24V	3077lm	90	TRIAC	BZRC2710G15NNE	black	●
4000K	45W	LED strip	24V	3077lm	90	TRIAC	BZRC2710G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	90W	LED strip	24V	5231lm	90	TRIAC	BZRC2810G15DBO	white	○
2700K	90W	LED strip	24V	5231lm	90	TRIAC	BZRC2810G15DNE	black	●
2700K	90W	LED strip	24V	5231lm	90	TRIAC	BZRC2810G15DOR	gold	●
3000K	90W	LED strip	24V	5539lm	90	TRIAC	BZRC2810G15WBO	white	○
3000K	90W	LED strip	24V	5539lm	90	TRIAC	BZRC2810G15WNE	black	●
3000K	90W	LED strip	24V	5539lm	90	TRIAC	BZRC2810G15WOR	gold	●
4000K	90W	LED strip	24V	6154lm	90	TRIAC	BZRC2810G15NBO	white	○
4000K	90W	LED strip	24V	6154lm	90	TRIAC	BZRC2810G15NNE	black	●
4000K	90W	LED strip	24V	6154lm	90	TRIAC	BZRC2810G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 96W (110/240V) 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

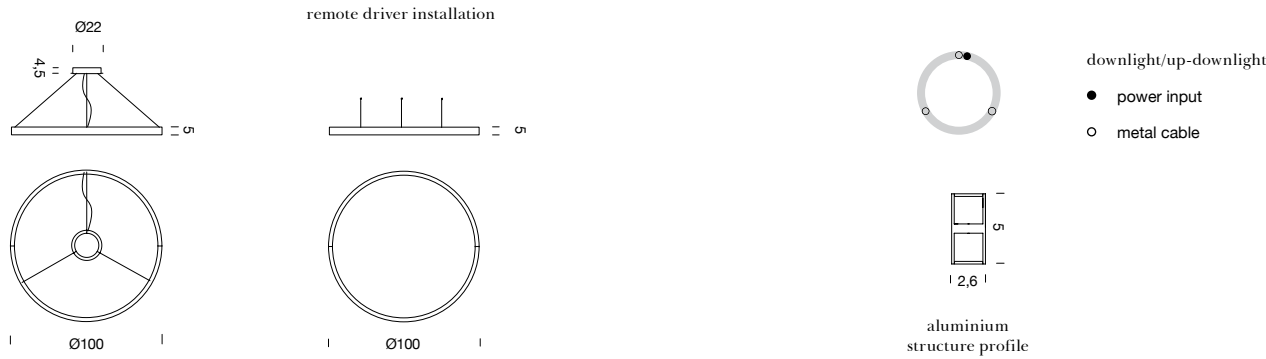

ZIRKOL HOME - CIRCLE 1m | CASAMBI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	45W	LED strip	24V	2616lm	90	CASAMBI	BZRC3310G15DBO	white	○
2700K	45W	LED strip	24V	2616lm	90	CASAMBI	BZRC3310G15DNE	black	●
2700K	45W	LED strip	24V	2616lm	90	CASAMBI	BZRC3310G15DOR	gold	●
3000K	45W	LED strip	24V	2769lm	90	CASAMBI	BZRC3310G15WBO	white	○
3000K	45W	LED strip	24V	2769lm	90	CASAMBI	BZRC3310G15WNE	black	●
3000K	45W	LED strip	24V	2769lm	90	CASAMBI	BZRC3310G15WOR	gold	●
4000K	45W	LED strip	24V	3077lm	90	CASAMBI	BZRC3310G15NBO	white	○
4000K	45W	LED strip	24V	3077lm	90	CASAMBI	BZRC3310G15NNE	black	●
4000K	45W	LED strip	24V	3077lm	90	CASAMBI	BZRC3310G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer CASAMBI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	90W	LED strip	24V	5231lm	90	CASAMBI	BZRC3410G15DBO	white	○
2700K	90W	LED strip	24V	5231lm	90	CASAMBI	BZRC3410G15DNE	black	●
2700K	90W	LED strip	24V	5231lm	90	CASAMBI	BZRC3410G15DOR	gold	●
3000K	90W	LED strip	24V	5539lm	90	CASAMBI	BZRC3410G15WBO	white	○
3000K	90W	LED strip	24V	5539lm	90	CASAMBI	BZRC3410G15WNE	black	●
3000K	90W	LED strip	24V	5539lm	90	CASAMBI	BZRC3410G15WOR	gold	●
4000K	90W	LED strip	24V	6154lm	90	CASAMBI	BZRC3410G15NBO	white	○
4000K	90W	LED strip	24V	6154lm	90	CASAMBI	BZRC3410G15NNE	black	●
4000K	90W	LED strip	24V	6154lm	90	CASAMBI	BZRC3410G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 100W (110-240V) 1 x dimmer CASAMBI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

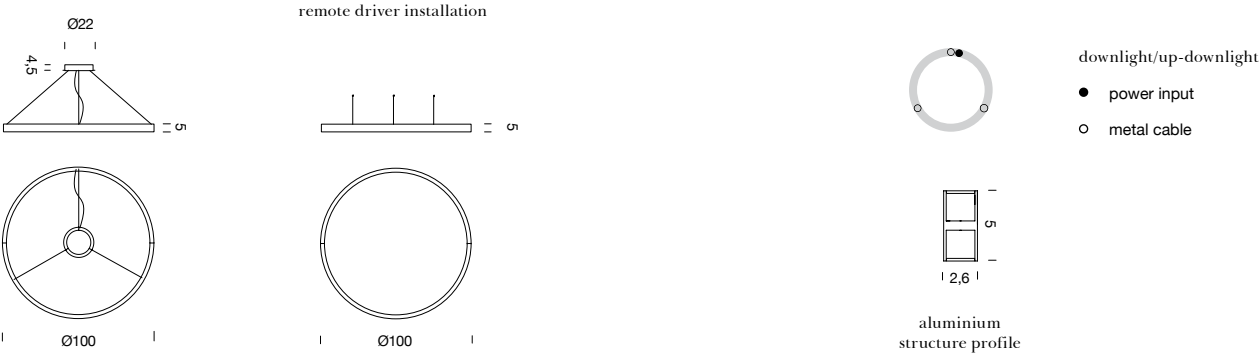

ZIRKOL HOME - CIRCLE 1m | DALI

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	45W	LED strip	24V	2616lm	90	DALI	BZRC1610G15DBO	white	○
2700K	45W	LED strip	24V	2616lm	90	DALI	BZRC1610G15DNE	black	●
2700K	45W	LED strip	24V	2616lm	90	DALI	BZRC1610G15DOR	gold	●
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRC1610G15WBO	white	○
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRC1610G15WNE	black	●
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRC1610G15WOR	gold	●
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRC1610G15NBO	white	○
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRC1610G15NNE	black	●
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRC1610G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.124-125 lighting options, emission, control systems, finishes								



CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	90W	LED strip	24V	5231lm	90	DALI	BZRC1710G15DBO	white	○
2700K	90W	LED strip	24V	5231lm	90	DALI	BZRC1710G15DNE	black	●
2700K	90W	LED strip	24V	5231lm	90	DALI	BZRC1710G15DOR	gold	●
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRC1710G15WBO	white	○
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRC1710G15WNE	black	●
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRC1710G15WOR	gold	●
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRC1710G15NBO	white	○
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRC1710G15NNE	black	●
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRC1710G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 100W (110-240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.124-125 lighting options, emission, control systems, finishes								


CE UK CA IP40

remote driver installation

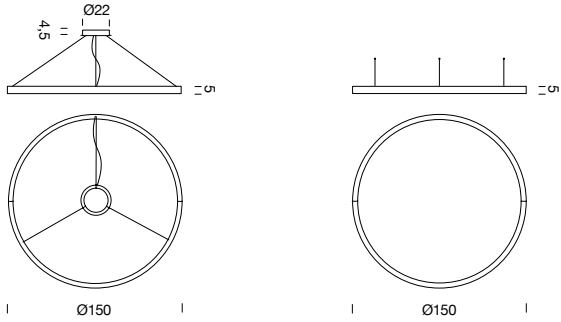

downlight/up-downlight

- power input
- metal cable



aluminium
structure profile

ZIRKOL HOME - CIRCLE 1,5m | DALI

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRC1615G15DBO	white	○
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRC1615G15DNE	black	●
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRC1615G15DOR	gold	●
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRC1615G15WBO	white	○
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRC1615G15WNE	black	●
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRC1615G15WOR	gold	●
4000K	68W	LED strip	24V	4616lm	90	DALI	BZRC1615G15NBO	white	○
4000K	68W	LED strip	24V	4616lm	90	DALI	BZRC1615G15NNE	black	●
4000K	68W	LED strip	24V	4616lm	90	DALI	BZRC1615G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	136W	LED strip	24V	7847lm	90	DALI	BZRC1715G15DBO	white	○
2700K	136W	LED strip	24V	7847lm	90	DALI	BZRC1715G15DNE	black	●
2700K	136W	LED strip	24V	7847lm	90	DALI	BZRC1715G15DOR	gold	●
3000K	136W	LED strip	24V	8308lm	90	DALI	BZRC1715G15WBO	white	○
3000K	136W	LED strip	24V	8308lm	90	DALI	BZRC1715G15WNE	black	●
3000K	136W	LED strip	24V	8308lm	90	DALI	BZRC1715G15WOR	gold	●
4000K	136W	LED strip	24V	9232lm	90	DALI	BZRC1715G15NBO	white	○
4000K	136W	LED strip	24V	9232lm	90	DALI	BZRC1715G15NNE	black	●
4000K	136W	LED strip	24V	9232lm	90	DALI	BZRC1715G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40







Zirkol Circle, black.
VITA DULCIS. "Paura e desiderio nell'Impero romano",
Palazzo delle Esposizioni, Rome

Pendant

Zirkol Circle

Zirkol Circle is suitable for illuminating large spaces and creating geometric combinations, adding a personalized touch with its circular light.

Adatto ad illuminare ampi spazi e a creare combinazioni geometriche, Zirkol Circle personalizza gli ambienti con una luce circolare.

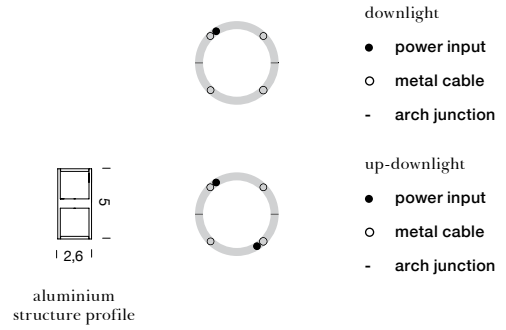

ZIRKOL CIRCLE 2m | DALI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	90W	LED strip	24V	5260lm	90	DALI	BZRC1620G15DBO	white	○
2700K	90W	LED strip	24V	5260lm	90	DALI	BZRC1620G15DNE	black	●
2700K	90W	LED strip	24V	5260lm	90	DALI	BZRC1620G15DOR	gold	●
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRC1620G15WBO	white	○
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRC1620G15WNE	black	●
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRC1620G15WOR	gold	●
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRC1620G15NBO	white	○
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRC1620G15NNE	black	●
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRC1620G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces								
included	1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m (ceiling attachment included)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	180W	LED strip	24V	10500lm	90	DALI	BZRC1720G15DBO	white	○
2700K	180W	LED strip	24V	10500lm	90	DALI	BZRC1720G15DNE	black	●
2700K	180W	LED strip	24V	10500lm	90	DALI	BZRC1720G15DOR	gold	●
3000K	180W	LED strip	24V	11078lm	90	DALI	BZRC1720G15WBO	white	○
3000K	180W	LED strip	24V	11078lm	90	DALI	BZRC1720G15WNE	black	●
3000K	180W	LED strip	24V	11078lm	90	DALI	BZRC1720G15WOR	gold	●
4000K	180W	LED strip	24V	12309lm	90	DALI	BZRC1720G15NBO	white	○
4000K	180W	LED strip	24V	12309lm	90	DALI	BZRC1720G15NNE	black	●
4000K	180W	LED strip	24V	12309lm	90	DALI	BZRC1720G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces								
included	1 x driver 250W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (ceiling attachment included)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

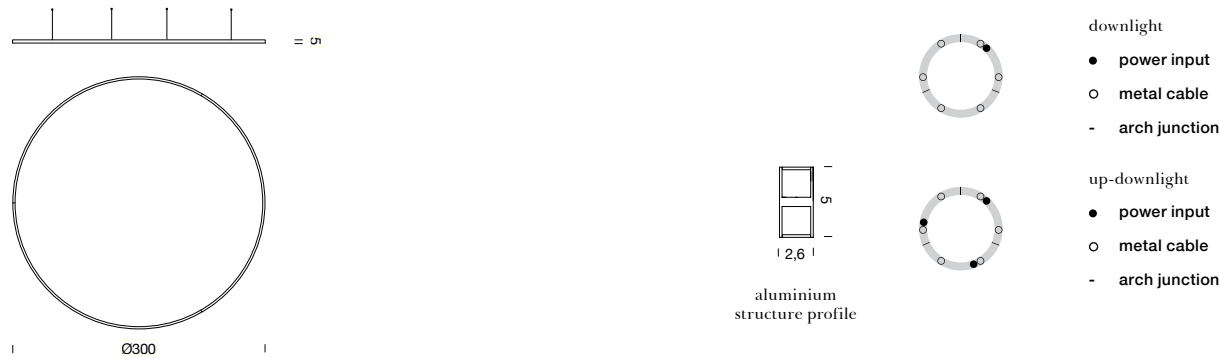

ZIRKOL CIRCLE 3m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	134W	LED strip	24V	7820lm	90	DALI	BZRC1630G15DBO	white	○
2700K	134W	LED strip	24V	7820lm	90	DALI	BZRC1630G15DNE	black	●
2700K	134W	LED strip	24V	7820lm	90	DALI	BZRC1630G15DOR	gold	●
3000K	134W	LED strip	24V	8238lm	90	DALI	BZRC1630G15WBO	white	○
3000K	134W	LED strip	24V	8238lm	90	DALI	BZRC1630G15WNE	black	●
3000K	134W	LED strip	24V	8238lm	90	DALI	BZRC1630G15WOR	gold	●
4000K	134W	LED strip	24V	9153lm	90	DALI	BZRC1630G15NBO	white	○
4000K	134W	LED strip	24V	9153lm	90	DALI	BZRC1630G15NNE	black	●
4000K	134W	LED strip	24V	9153lm	90	DALI	BZRC1630G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 3 pieces								
included	1 x driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 5m 6 x adjustable metal cable length 3m (ceiling attachment included)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	268W	LED strip	24V	15640lm	90	DALI	BZRC1730G15DBO	white	○
2700K	268W	LED strip	24V	15640lm	90	DALI	BZRC1730G15DNE	black	●
2700K	268W	LED strip	24V	15640lm	90	DALI	BZRC1730G15DOR	gold	●
3000K	268W	LED strip	24V	16476lm	90	DALI	BZRC1730G15WBO	white	○
3000K	268W	LED strip	24V	16476lm	90	DALI	BZRC1730G15WNE	black	●
3000K	268W	LED strip	24V	16476lm	90	DALI	BZRC1730G15WOR	gold	●
4000K	268W	LED strip	24V	18306lm	90	DALI	BZRC1730G15NBO	white	○
4000K	268W	LED strip	24V	18306lm	90	DALI	BZRC1730G15NNE	black	●
4000K	268W	LED strip	24V	18306lm	90	DALI	BZRC1730G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 3 pieces								
included	3 x drivers 100 (110/240V) 3 x dimmer DALI 3 x electrical cable 5m 6 x adjustable metal cable length 3m (ceiling attachment included)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

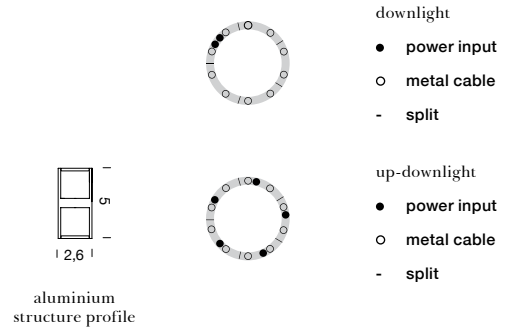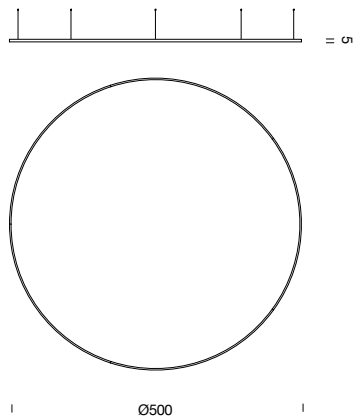

ZIRKOL CIRCLE 5m | DALI

DOWNLIGHT									
CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	226W	LED strip	24V	13100lm	90	DALI	BZRC1650G15DBO	white	○
2700K	226W	LED strip	24V	13100lm	90	DALI	BZRC1650G15DNE	black	●
2700K	226W	LED strip	24V	13100lm	90	DALI	BZRC1650G15DOR	gold	●
3000K	226W	LED strip	24V	13847lm	90	DALI	BZRC1650G15WBO	white	○
3000K	226W	LED strip	24V	13847lm	90	DALI	BZRC1650G15WNE	black	●
3000K	226W	LED strip	24V	13847lm	90	DALI	BZRC1650G15WOR	gold	●
4000K	226W	LED strip	24V	15386lm	90	DALI	BZRC1650G15NBO	white	○
4000K	226W	LED strip	24V	15386lm	90	DALI	BZRC1650G15NNE	black	●
4000K	226W	LED strip	24V	15386lm	90	DALI	BZRC1650G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 5 pieces								
included	1 x driver 250W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 10 x adjustable metal cable length 3m (ceiling attachment included)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT									
CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	452W	LED strip	24V	26100lm	90	DALI	BZRC1750G15DBO	white	○
2700K	452W	LED strip	24V	26100lm	90	DALI	BZRC1750G15DNE	black	●
2700K	452W	LED strip	24V	26100lm	90	DALI	BZRC1750G15DOR	gold	●
3000K	452W	LED strip	24V	27695lm	90	DALI	BZRC1750G15WBO	white	○
3000K	452W	LED strip	24V	27695lm	90	DALI	BZRC1750G15WNE	black	●
3000K	452W	LED strip	24V	27695lm	90	DALI	BZRC1750G15WOR	gold	●
4000K	452W	LED strip	24V	30772lm	90	DALI	BZRC1750G15NBO	white	○
4000K	452W	LED strip	24V	30772lm	90	DALI	BZRC1750G15NNE	black	●
4000K	452W	LED strip	24V	30772lm	90	DALI	BZRC1750G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 5 pieces								
included	5 x driver 100W (110/240V) 5 x dimmer DALI 5 x electrical cable 5m 10 x adjustable metal cable 3m (ceiling attachment included)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40







Zirkol Circle, gold.
Private project, Manchester

Ceiling

Zirkol Ceiling

Zirkol Ceiling allows the driver to be housed inside the ceiling rose, thus adapting to any ceiling type.

Zirkol Ceiling consente di ospitare il driver all'interno del rosone, adattandosi così a qualsiasi tipologia di soffitto.

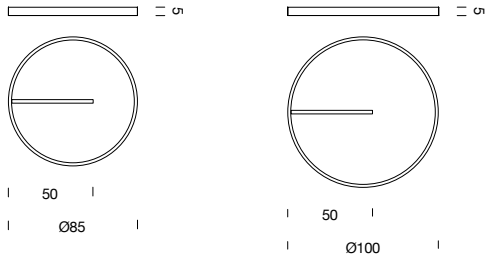

ZIRKOL CEILING 0,85m | DALI



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	35W	LED strip	24V	2000lm	90	DALI	BZRCD408G15DBO	white	○
2700K	35W	LED strip	24V	2000lm	90	DALI	BZRCD408G15DNE	black	●
2700K	35W	LED strip	24V	2000lm	90	DALI	BZRCD408G15DOR	gold	●
3000K	35W	LED strip	24V	2200lm	90	DALI	BZRCD408G15WBO	white	○
3000K	35W	LED strip	24V	2200lm	90	DALI	BZRCD408G15WNE	black	●
3000K	35W	LED strip	24V	2200lm	90	DALI	BZRCD408G15WOR	gold	●
4000K	35W	LED strip	24V	2360lm	90	DALI	BZRCD408G15NBO	white	○
4000K	35W	LED strip	24V	2360lm	90	DALI	BZRCD408G15NNE	black	●
4000K	35W	LED strip	24V	2360lm	90	DALI	BZRCD408G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
integrated driver	driver box with 1 x driver Superslim 60W Dali2/Push Dali (220/240V)								
customizations	lumen output, finish								

CE UK CA IP40

ZIRKOL CEILING 1m | DALI

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	45W	LED strip	24V	2616lm	90	DALI	BZRCD410G15DBO	white	○
2700K	45W	LED strip	24V	2616lm	90	DALI	BZRCD410G15DNE	black	●
2700K	45W	LED strip	24V	2616lm	90	DALI	BZRCD410G15DOR	gold	●
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRCD410G15WBO	white	○
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRCD410G15WNE	black	●
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRCD410G15WOR	gold	●
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRCD410G15NBO	white	○
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRCD410G15NNE	black	●
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRCD410G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
integrated driver	driver box with 1 x driver Superslim 60W Dali2/Push Dali (220/240V)								
customizations	lumen output, finish								

CE UK CA IP40



ZIRKOL CEILING 1,5m | DALI

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	60W	LED strip	24V	3923lm	90	DALI	BZRCD415G15DBO	white	○
2700K	60W	LED strip	24V	3923lm	90	DALI	BZRCD415G15DNE	black	●
2700K	60W	LED strip	24V	3923lm	90	DALI	BZRCD415G15DOR	gold	●
3000K	60W	LED strip	24V	4154lm	90	DALI	BZRCD415G15WBO	white	○
3000K	60W	LED strip	24V	4154lm	90	DALI	BZRCD415G15WNE	black	●
3000K	60W	LED strip	24V	4154lm	90	DALI	BZRCD415G15WOR	gold	●
4000K	60W	LED strip	24V	4616lm	90	DALI	BZRCD415G15NBO	white	○
4000K	60W	LED strip	24V	4616lm	90	DALI	BZRCD415G15NNE	black	●
4000K	60W	LED strip	24V	4616lm	90	DALI	BZRCD415G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
integrated driver	driver box with 1 x driver Superslim 60W Dali2/Push Dali (220/240V)								
customizations	lumen output, finish								

CE UK CA IP40




Zirkol Ceiling, black.
Private project, Lugano

Wall

Zirkol Circle Wall

Zirkol Circle Wall offers distinctive indirect lighting that is both functional and highly decorative. It features a circular structure with rods of varying lengths, allowing wall installation and combination with other lamps.

Zirkol Circle Wall permette una caratteristica illuminazione indiretta che sa essere funzionale e al tempo stesso altamente decorativa. È composto da una struttura circolare comprensiva di una coppia di tigi di differente lunghezza che ne permettono l'installazione a parete, anche in combinazione con altre lampade.

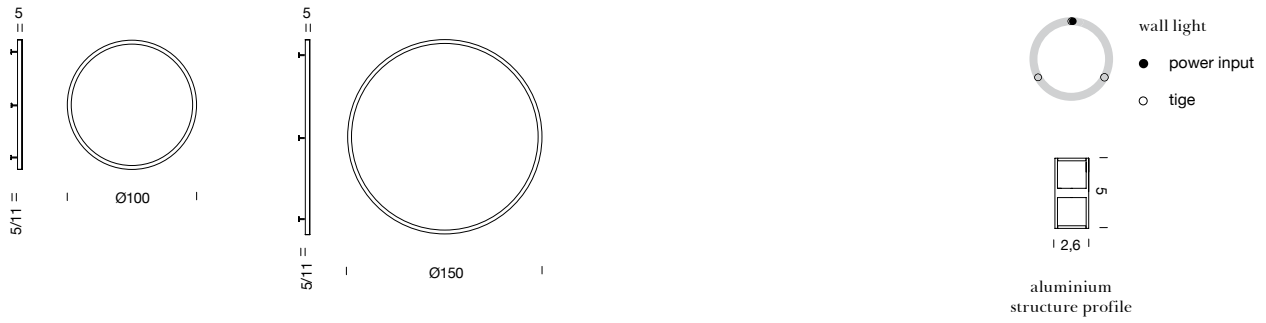

ZIRKOL CIRCLE WALL 1m | DALI


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish
2700K	45W	LED strip	24V	2616lm	90	DALI	BZRC4210G15DNE	black ●
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRC4210G15WNE	black ●
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRC4210G15NNE	black ●
note	remote driver RAL 9005 black shipped assembled indirect light emission							
included	1 x driver 60W (220/240V) 1 x dimmer DALI 3 x tixe 5 cm 3 x tixe 11 cm 1 x electrical cable 50cm							
customizations	external electrical cable optional accessories on p.124-125 lighting options, control systems, finishes							

CE UK CA  IP40

ZIRKOL CIRCLE WALL 1,5m | DALI

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRC4215G15DNE	black ●
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRC4215G15WNE	black ●
4000K	68W	LED strip	24V	4616lm	90	DALI	BZRC4215G15NNE	black ●
note	remote driver RAL 9005 black shipped assembled indirect light emission							
included	1 x driver 75W (110/240V) 1 x dimmer DALI 3 x tixe 5 cm 3 x tixe 11 cm 1 x electrical cable 50cm							
customizations	external electrical cable optional accessories on p.124-125 lighting options, control systems, finishes							

CE UK CA  IP40

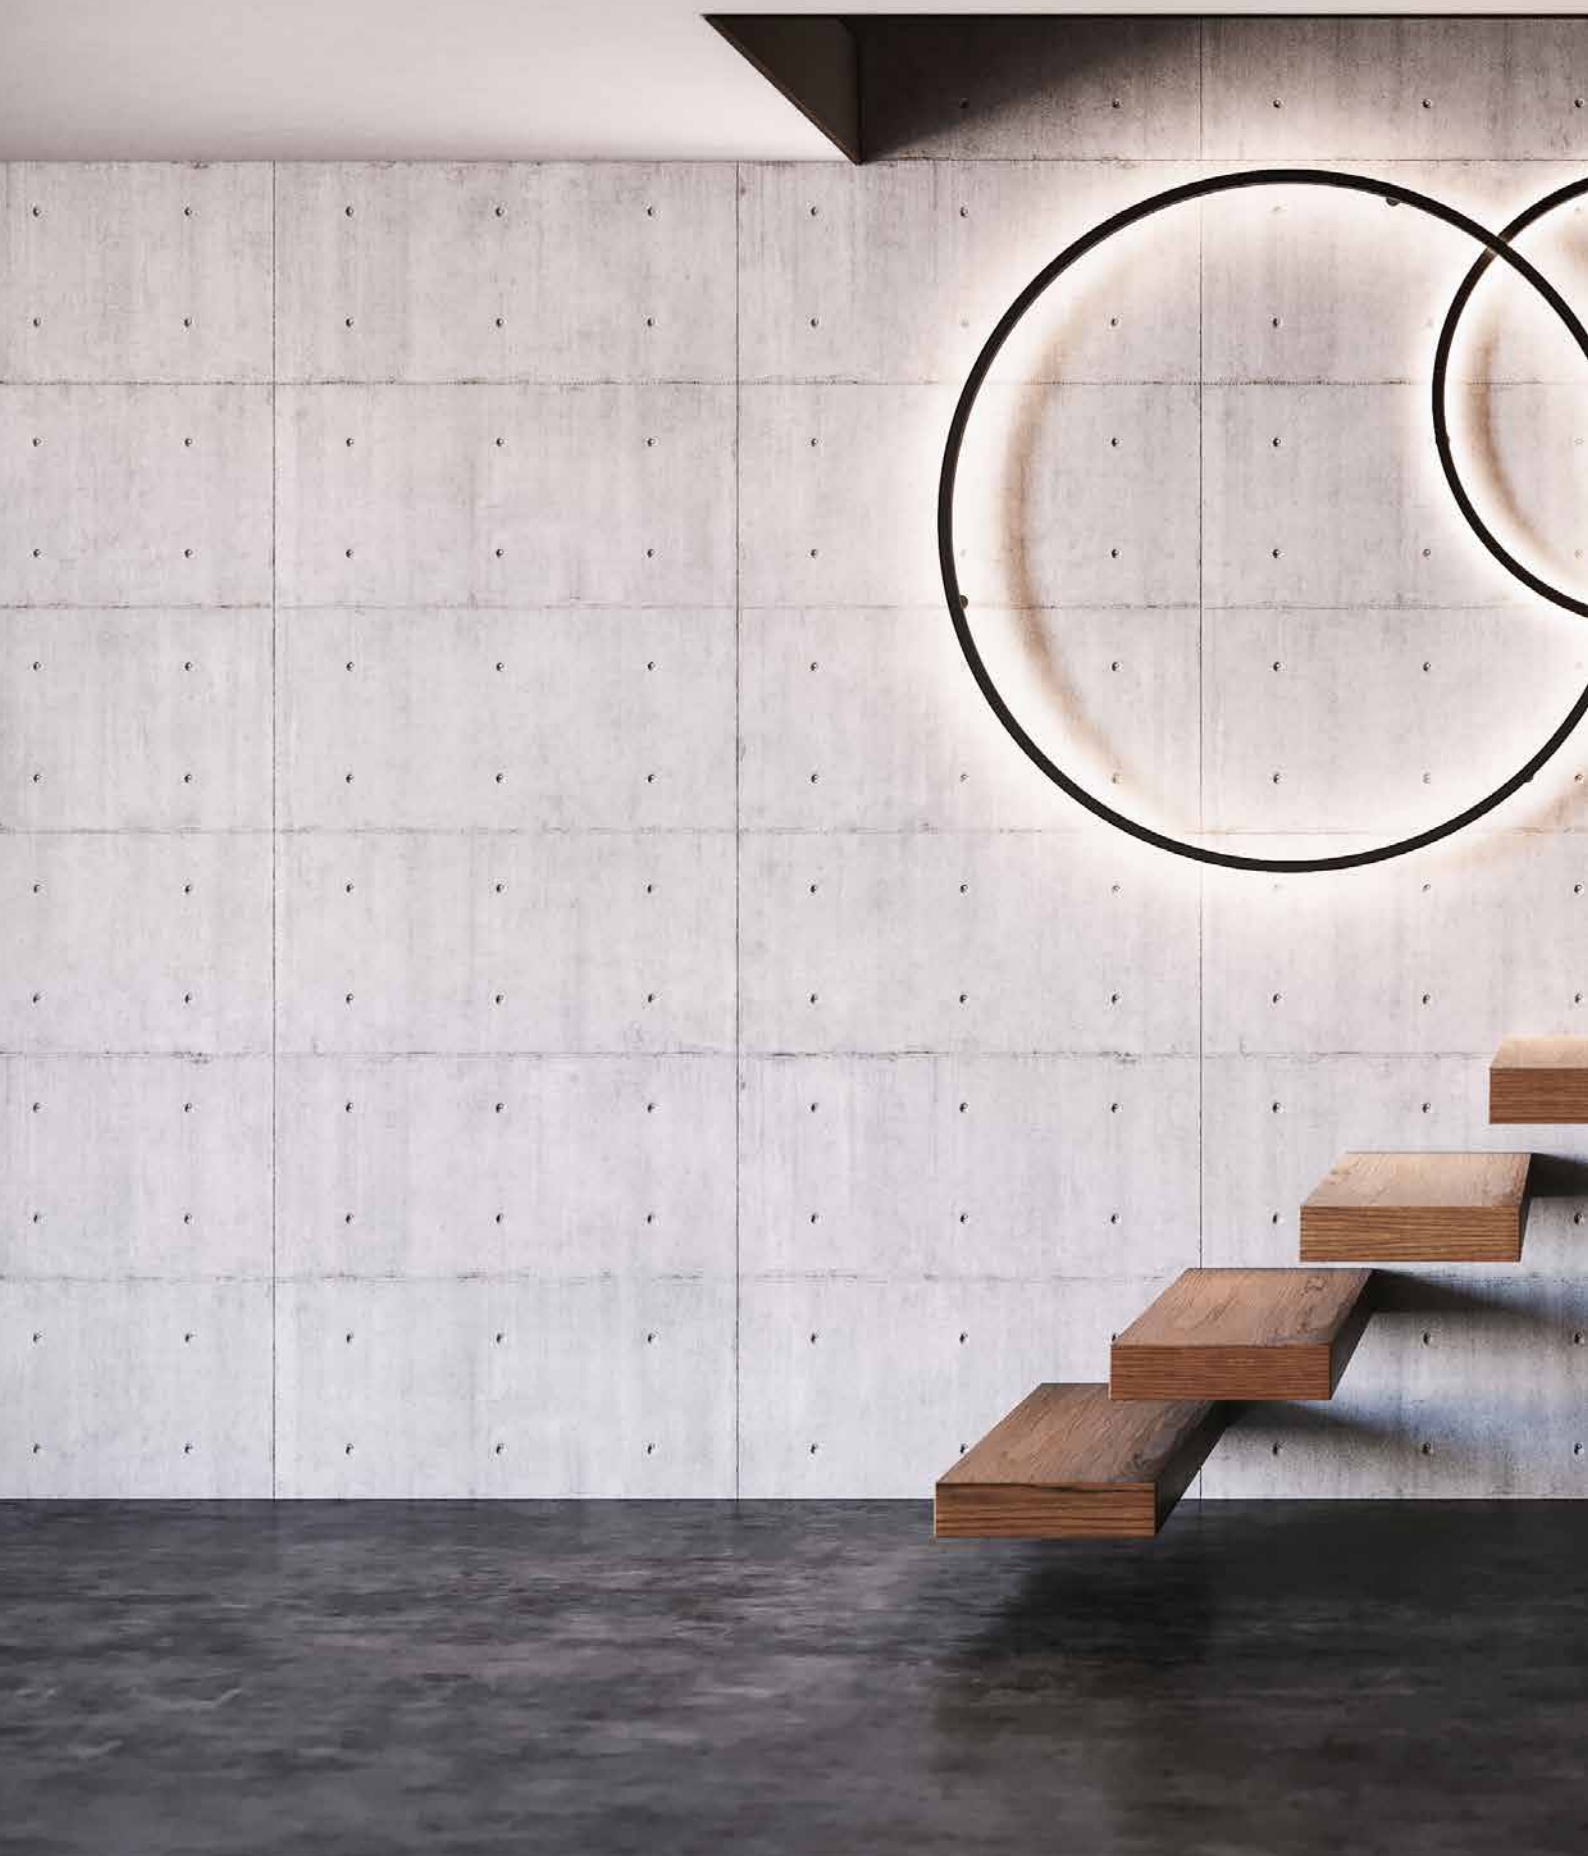






Zirkol Circle Wall, black.
Private residence, Milan

Pendant

Zirkol Gap

Compact in size, it features an open shape that adds personality to spaces.

Di dimensioni contenute, accoglie una forma aperta che dona personalità agli spazi.

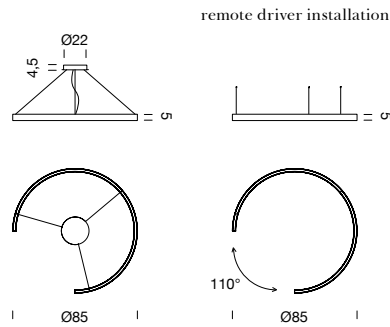

ZIRKOL GAP 0,85m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	26W	LED strip	24V	1500lm	90	DALI	BZRG1608G15DNE	white	○
2700K	26W	LED strip	24V	1500lm	90	DALI	BZRG1608G15DBO	black	●
2700K	26W	LED strip	24V	1500lm	90	DALI	BZRG1608G15DOR	gold	●
3000K	26W	LED strip	24V	1650lm	90	DALI	BZRG1608G15WNE	white	○
3000K	26W	LED strip	24V	1650lm	90	DALI	BZRG1608G15WBO	black	●
3000K	26W	LED strip	24V	1650lm	90	DALI	BZRG1608G15WOR	gold	●
4000K	26W	LED strip	24V	1770lm	90	DALI	BZRG1608G15NNE	white	○
4000K	26W	LED strip	24V	1770lm	90	DALI	BZRG1608G15NBO	black	●
4000K	26W	LED strip	24V	1770lm	90	DALI	BZRG1608G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	52W	LED strip	24V	3000lm	90	DALI	BZRG1708G15DBO	white	○
2700K	52W	LED strip	24V	3000lm	90	DALI	BZRG1708G15DNE	black	●
2700K	52W	LED strip	24V	3000lm	90	DALI	BZRG1708G15DOR	gold	●
3000K	52W	LED strip	24V	3300lm	90	DALI	BZRG1708G15WBO	white	○
3000K	52W	LED strip	24V	3300lm	90	DALI	BZRG1708G15WNE	black	●
3000K	52W	LED strip	24V	3300lm	90	DALI	BZRG1708G15WOR	gold	●
4000K	52W	LED strip	24V	3540m	90	DALI	BZRG1708G15NBO	white	○
4000K	52W	LED strip	24V	3540m	90	DALI	BZRG1708G15NNE	black	●
4000K	52W	LED strip	24V	3540m	90	DALI	BZRG1708G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40



ZIRKOL GAP 1m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	34W	LED strip	24V	1962lm	90	DALI	BZRG1610G15DBO	white	○
2700K	34W	LED strip	24V	1962lm	90	DALI	BZRG1610G15DNE	black	●
2700K	34W	LED strip	24V	1962lm	90	DALI	BZRG1610G15DOR	gold	●
3000K	34W	LED strip	24V	2077lm	90	DALI	BZRG1610G15WB0	white	○
3000K	34W	LED strip	24V	2077lm	90	DALI	BZRG1610G15WNE	black	●
3000K	34W	LED strip	24V	2077lm	90	DALI	BZRG1610G15WOR	gold	●
4000K	34W	LED strip	24V	2308lm	90	DALI	BZRG1610G15NB0	white	○
4000K	34W	LED strip	24V	2308lm	90	DALI	BZRG1610G15NNE	black	●
4000K	34W	LED strip	24V	2308lm	90	DALI	BZRG1610G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								



UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRG1710G15DBO	white	○
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRG1710G15DNE	black	●
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRG1710G15DOR	gold	●
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRG1710G15WBO	white	○
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRG1710G15WNE	black	●
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRG1710G15WOR	gold	●
4000K	68W	LED strip	24V	4615lm	90	DALI	BZRG1710G15NBO	white	○
4000K	68W	LED strip	24V	4615lm	90	DALI	BZRG1710G15NNE	black	●
4000K	68W	LED strip	24V	4615lm	90	DALI	BZRG1710G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								



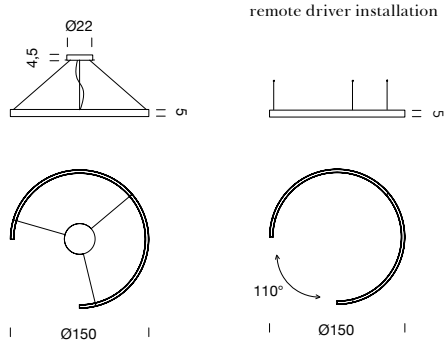

ZIRKOL GAP 1,5m | DALI

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	50W	LED strip	24V	2942lm	90	DALI	BZRG1615G15DBO	white	○
2700K	50W	LED strip	24V	2942lm	90	DALI	BZRG1615G15DNE	black	●
2700K	50W	LED strip	24V	2942lm	90	DALI	BZRG1615G15DOR	gold	●
3000K	50W	LED strip	24V	3115lm	90	DALI	BZRG1615G15WBO	white	○
3000K	50W	LED strip	24V	3115lm	90	DALI	BZRG1615G15WNE	black	●
3000K	50W	LED strip	24V	3115lm	90	DALI	BZRG1615G15WOR	gold	●
4000K	50W	LED strip	24V	3462lm	90	DALI	BZRG1615G15NBO	white	○
4000K	50W	LED strip	24V	3462lm	90	DALI	BZRG1615G15NNE	black	●
4000K	50W	LED strip	24V	3462lm	90	DALI	BZRG1615G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	100W	LED strip	24V	5885lm	90	DALI	BZRG1715G15DBO	white	○
2700K	100W	LED strip	24V	5885lm	90	DALI	BZRG1715G15DNE	black	●
2700K	100W	LED strip	24V	5885lm	90	DALI	BZRG1715G15DOR	gold	●
3000K	100W	LED strip	24V	6231lm	90	DALI	BZRG1715G15WBO	white	○
3000K	100W	LED strip	24V	6231lm	90	DALI	BZRG1715G15WNE	black	●
3000K	100W	LED strip	24V	6231lm	90	DALI	BZRG1715G15WOR	gold	●
4000K	100W	LED strip	24V	6924lm	90	DALI	BZRG1715G15NBO	white	○
4000K	100W	LED strip	24V	6924lm	90	DALI	BZRG1715G15NNE	black	●
4000K	100W	LED strip	24V	6924lm	90	DALI	BZRG1715G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	round canopy with 1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								



CE UK CA IP40

Pendant

Zirkol Round

Originally designed as a single suspension lamp, Zirkol Round's strong decorative appeal makes it ideal for customized combinations of multiple lamps.

Zirkol Round nasce come sospensione singola, ma grazie al suo forte carattere decorativo si presta particolarmente a combinazioni personalizzate di più lampade.





ZIRKOL ROUND 1m | DALI

DOWNLIGHT									
CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	22,5W	LED strip	24V	1308lm	90	DALI	BZRR1610G15DBO	white	○
2700K	22,5W	LED strip	24V	1308lm	90	DALI	BZRR1610G15DNE	black	●
2700K	22,5W	LED strip	24V	1308lm	90	DALI	BZRR1610G15DOR	gold	●
3000K	22,5W	LED strip	24V	1384lm	90	DALI	BZRR1610G15WBO	white	○
3000K	22,5W	LED strip	24V	1384lm	90	DALI	BZRR1610G15WNE	black	●
3000K	22,5W	LED strip	24V	1384lm	90	DALI	BZRR1610G15WOR	gold	●
4000K	22,5W	LED strip	24V	1538lm	90	DALI	BZRR1610G15NBO	white	○
4000K	22,5W	LED strip	24V	1538lm	90	DALI	BZRR1610G15NNE	black	●
4000K	22,5W	LED strip	24V	1538lm	90	DALI	BZRR1610G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT									
CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	45W	LED strip	24V	2615lm	90	DALI	BZRR1710G15DBO	white	○
2700K	45W	LED strip	24V	2615lm	90	DALI	BZRR1710G15DNE	black	●
2700K	45W	LED strip	24V	2615lm	90	DALI	BZRR1710G15DOR	gold	●
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRR1710G15WBO	white	○
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRR1710G15WNE	black	●
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRR1710G15WOR	gold	●
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRR1710G15NBO	white	○
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRR1710G15NNE	black	●
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRR1710G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40



ZIRKOL ROUND 1,5m | DALI

DOWNLIGHT




CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	34W	LED strip	24V	1961lm	90	DALI	BZRR1615G15DBO	white	○
2700K	34W	LED strip	24V	1961lm	90	DALI	BZRR1615G15DNE	black	●
2700K	34W	LED strip	24V	1961lm	90	DALI	BZRR1615G15DOR	gold	●
3000K	34W	LED strip	24V	2077lm	90	DALI	BZRR1615G15WBO	white	○
3000K	34W	LED strip	24V	2077lm	90	DALI	BZRR1615G15WNE	black	●
3000K	34W	LED strip	24V	2077lm	90	DALI	BZRR1615G15WOR	gold	●
4000K	34W	LED strip	24V	23068lm	90	DALI	BZRR1615G15NBO	white	○
4000K	34W	LED strip	24V	23068lm	90	DALI	BZRR1615G15NNE	black	●
4000K	34W	LED strip	24V	23068lm	90	DALI	BZRR1615G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRR1715G15DBO	white	○
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRR1715G15DNE	black	●
2700K	68W	LED strip	24V	3923lm	90	DALI	BZRR1715G15DOR	gold	●
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRR1715G15WBO	white	○
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRR1715G15WNE	black	●
3000K	68W	LED strip	24V	4154lm	90	DALI	BZRR1715G15WOR	gold	●
4000K	68W	LED strip	24V	4616lm	90	DALI	BZRR1715G15NBO	white	○
4000K	68W	LED strip	24V	4616lm	90	DALI	BZRR1715G15NNE	black	●
4000K	68W	LED strip	24V	4616lm	90	DALI	BZRR1715G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	remote driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40



aluminium
structure profile

ZIRKOL ROUND 2m | DALI

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	45W	LED strip	24V	2630lm	90	DALI	BZRR1620G15DBO	white	○
2700K	45W	LED strip	24V	2630lm	90	DALI	BZRR1620G15DNE	black	●
2700K	45W	LED strip	24V	2630lm	90	DALI	BZRR1620G15DOR	gold	●
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRR1620G15WBO	white	○
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRR1620G15WNE	black	●
3000K	45W	LED strip	24V	2769lm	90	DALI	BZRR1620G15WOR	gold	●
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRR1620G15NBO	white	○
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRR1620G15NNE	black	●
4000K	45W	LED strip	24V	3077lm	90	DALI	BZRR1620G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	90W	LED strip	24V	5250lm	90	DALI	BZRR1720G15DBO	white	○
2700K	90W	LED strip	24V	5250lm	90	DALI	BZRR1720G15DNE	black	●
2700K	90W	LED strip	24V	5250lm	90	DALI	BZRR1720G15DOR	gold	●
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRR1720G15WBO	white	○
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRR1720G15WNE	black	●
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRR1720G15WOR	gold	●
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRR1720G15NBO	white	○
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRR1720G15NNE	black	●
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRR1720G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	remote driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40





Zirkol Round, gold.
Luxury Boutique Officina Bernardi, Milan


Pendant



Zirkol Side

Rotating the profile geometry changes the light direction, achieving uniform and diffused lateral emission.

Ruotando la geometria del profilo, la luce cambia la propria direzione, permettendo un'emissione laterale altamente uniforme e diffusa.

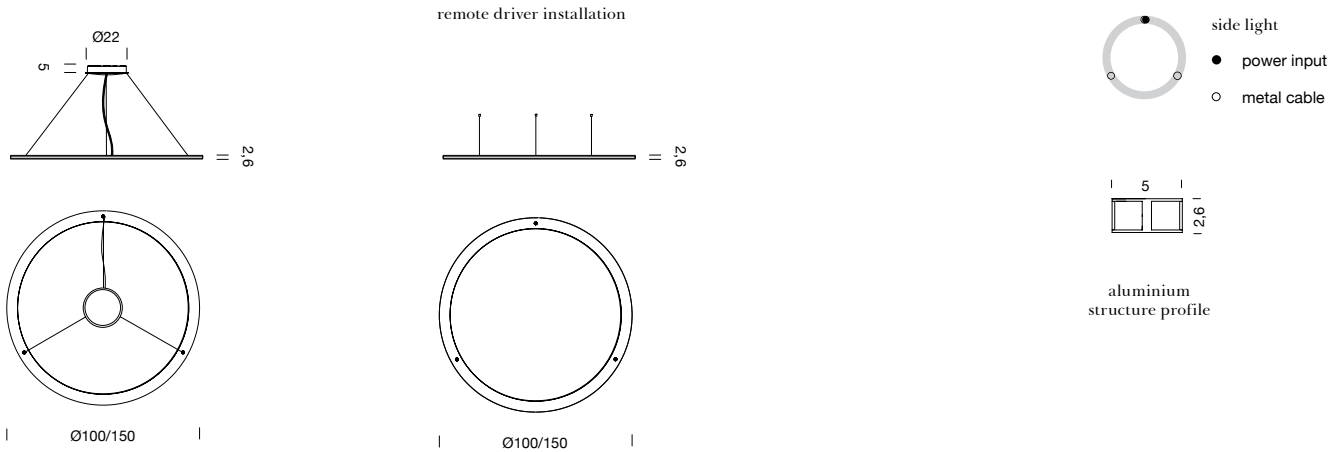

ZIRKOL SIDE 1m | DALI

INSIDE-OUTSIDE LIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish
2700K	90W	LED strip	24V	5231lm	90	DALI	BZRS1710G15DBO	white ○
2700K	90W	LED strip	24V	5231lm	90	DALI	BZRS1710G15DNE	black ●
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRS1710G15WBO	white ○
3000K	90W	LED strip	24V	5539lm	90	DALI	BZRS1710G15WNE	black ●
4000K	90W	LED strip	24V	56154m	90	DALI	BZRS1710G15NBO	white ○
4000K	90W	LED strip	24V	6154lm	90	DALI	BZRS1710G15NNE	black ●
note	RAL 9005 black RAL 9016 white shipped assembled							
included	round canopy with 1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m)							
customizations	external electrical cable optional accessories on p.124-125 lighting options, control systems, finishes							

CE UK CA IP40


ZIRKOL SIDE 1,5m | DALI

INSIDE-OUTSIDE LIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish
2700K	136W	LED strip	24V	7847lm	90	DALI	BZRS1715G15DBO	white ○
2700K	136W	LED strip	24V	7847lm	90	DALI	BZRS1715G15DNE	black ●
3000K	136W	LED strip	24V	8308lm	90	DALI	BZRS1715G15WBO	white ○
3000K	136W	LED strip	24V	8308lm	90	DALI	BZRS1715G15WNE	black ●
4000K	136W	LED strip	24V	9232lm	90	DALI	BZRS1715G15NBO	white ○
4000K	136W	LED strip	24V	9232lm	90	DALI	BZRS1715G15NNE	black ●
note	RAL 9005 black RAL 9016 white shipped assembled							
included	round canopy with 1 x driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m)							
customizations	external electrical cable optional accessories on p.124-125 lighting options, control systems, finishes							

CE UK CA IP40


Pendant

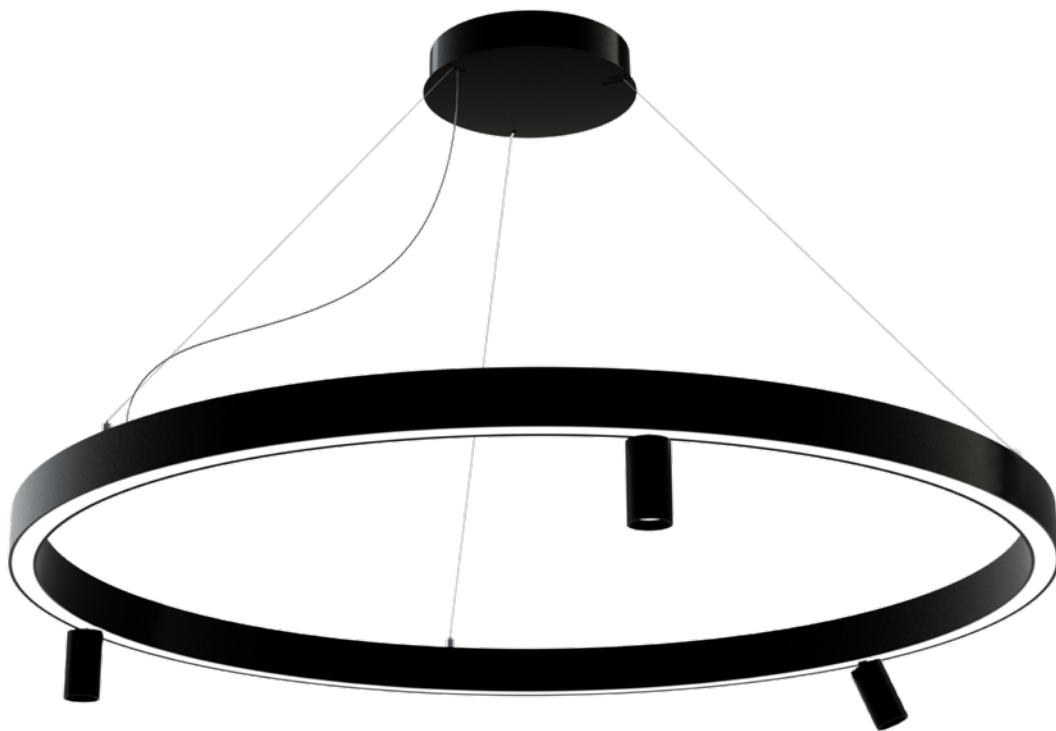

Zirkol Spot

Zirkol Spot enhances lighting flexibility with adjustable spotlights to highlight details within a space.

Zirkol Spot aggiunge una maggiore flessibilità di illuminazione, con l'introduzione di faretti orientabili destinati a valorizzare dettagli nell'ambiente.

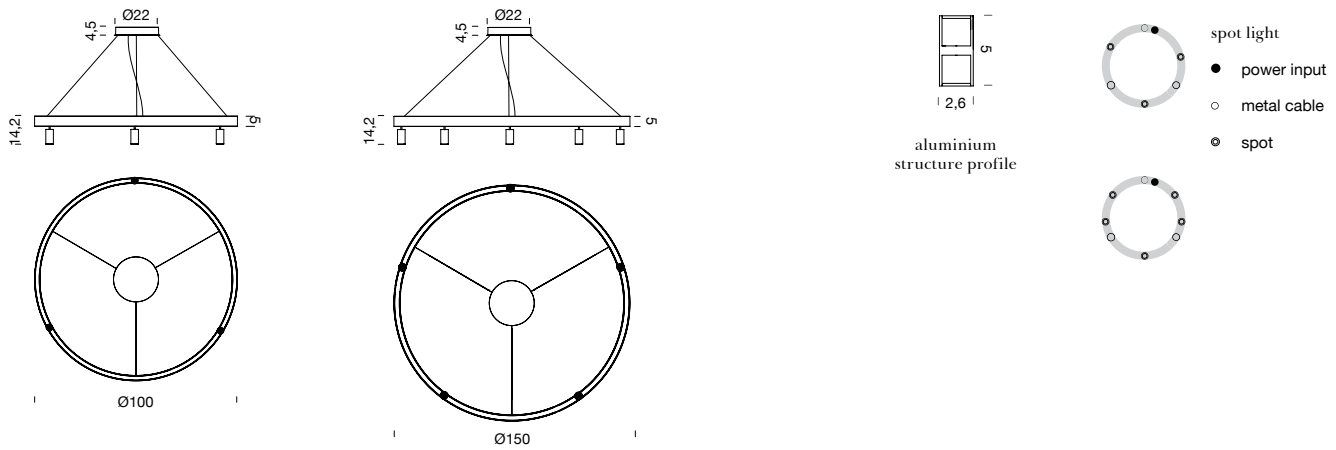

ZIRKOL SPOT 1m | DALI

DOWNLIGHT									
CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	60W	LED strip	24V	3955lm	90	DALI	BZRCF610G15DBO	white	○
2700K	60W	LED strip	24V	3955lm	90	DALI	BZRCF610G15DNE	black	●
2700K	60W	LED strip	24V	3955lm	90	DALI	BZRCF610G15DOR	gold	●
3000K	60W	LED strip	24V	4393lm	90	DALI	BZRCF610G15WBO	white	○
3000K	60W	LED strip	24V	4393lm	90	DALI	BZRCF610G15WNE	black	●
3000K	60W	LED strip	24V	4393lm	90	DALI	BZRCF610G15WOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled *396lm for a single spot spots diameter 3,7cm / spot power consumption 5W								
included	round canopy with 1 x driver 75W (110/24V) 1 x dimmer DALI 1 x electrical cable 4m 3x adjustable spots up to 90° black/white/gold 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

ZIRKOL SPOT 1,5m | DALI


DOWNLIGHT									
CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	93W	LED strip	24V	5515lm	90	DALI	BZRCF615G15DBO	white	○
2700K	93W	LED strip	24V	5515lm	90	DALI	BZRCF615G15DNE	black	●
2700K	93W	LED strip	24V	5515lm	90	DALI	BZRCF615G15DOR	gold	●
3000K	93W	LED strip	24V	6130lm	90	DALI	BZRCF615G15WBO	white	○
3000K	93W	LED strip	24V	6130lm	90	DALI	BZRCF615G15WNE	black	●
3000K	93W	LED strip	24V	6130lm	90	DALI	BZRCF615G15WOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled *396lm for a single spot spots diameter 3,7cm / spot power consumption 5W								
included	round canopy with 1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3x adjustable spots up to 90° black/white/gold 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

Pendant



Zirkol Acoustic





blue navy panel



deep green panel

Ideal for office settings or spaces where acoustics are important, it provides high lighting quality and acoustic effectiveness.

Perfetto per soluzioni d'ufficio o per ambienti in cui il suono assume un ruolo centrale, offre al tempo stesso elevata qualità di illuminazione ed efficacia acustica.

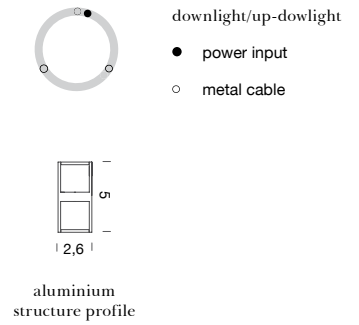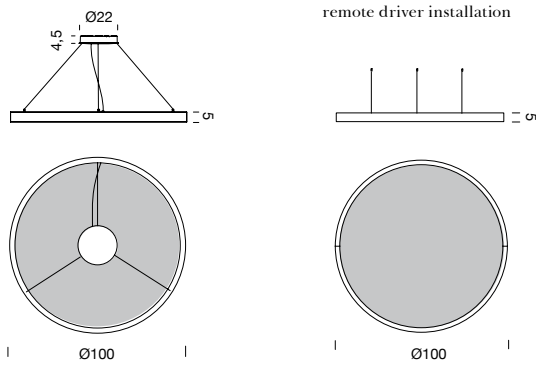

ZIRKOL ACOUSTIC 1m | DALI

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	panel	code	finish	
2700K	45W	LED strip	24V	2616lm	90	DALI	grey	BZAC1610G15DBG	white	○
2700K	45W	LED strip	24V	2616lm	90	DALI	grey	BZAC1610G15DNG	black	●
3000K	45W	LED strip	24V	2769lm	90	DALI	grey	BZAC1610G15WBG	white	○
3000K	45W	LED strip	24V	2769lm	90	DALI	grey	BZAC1610G15WNG	black	●
4000K	45W	LED strip	24V	3077lm	90	DALI	grey	BZAC1610G15NNG	white	○
4000K	45W	LED strip	24V	3077lm	90	DALI	grey	BZAC1610G15NNG	black	●
note	RAL 9005 black RAL 9016 white shipped assembled									
included	round canopy with 1 x driver 75W (110/24V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included Grey sound-absorbing panel 100% polyester FR									
customizations	blue navy or deep green panels available on demand, external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes									

CE UK CA IP40


ZIRKOL ACOUSTIC 1m | DALI

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	panel	code	finish	
2700K	90W	LED strip	24V	5231lm	90	DALI	grey	BZAC1710G15DBG	white	○
2700K	90W	LED strip	24V	5231lm	90	DALI	grey	BZAC1710G15DNG	black	●
3000K	90W	LED strip	24V	5539lm	90	DALI	grey	BZAC1710G15WBG	white	○
3000K	90W	LED strip	24V	5539lm	90	DALI	grey	BZAC1710G15WNG	black	●
4000K	90W	LED strip	24V	6154lm	90	DALI	grey	BZAC1710G15NNG	white	○
4000K	90W	LED strip	24V	6154lm	90	DALI	grey	BZAC1710G15NNG	black	●
note	RAL 9005 black RAL 9016 white shipped assembled									
included	round canopy with 1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included Grey sound-absorbing panel 100% polyester FR									
customizations	blue navy or deep green panels available on demand, external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes									

CE UK CA IP40


Pendant

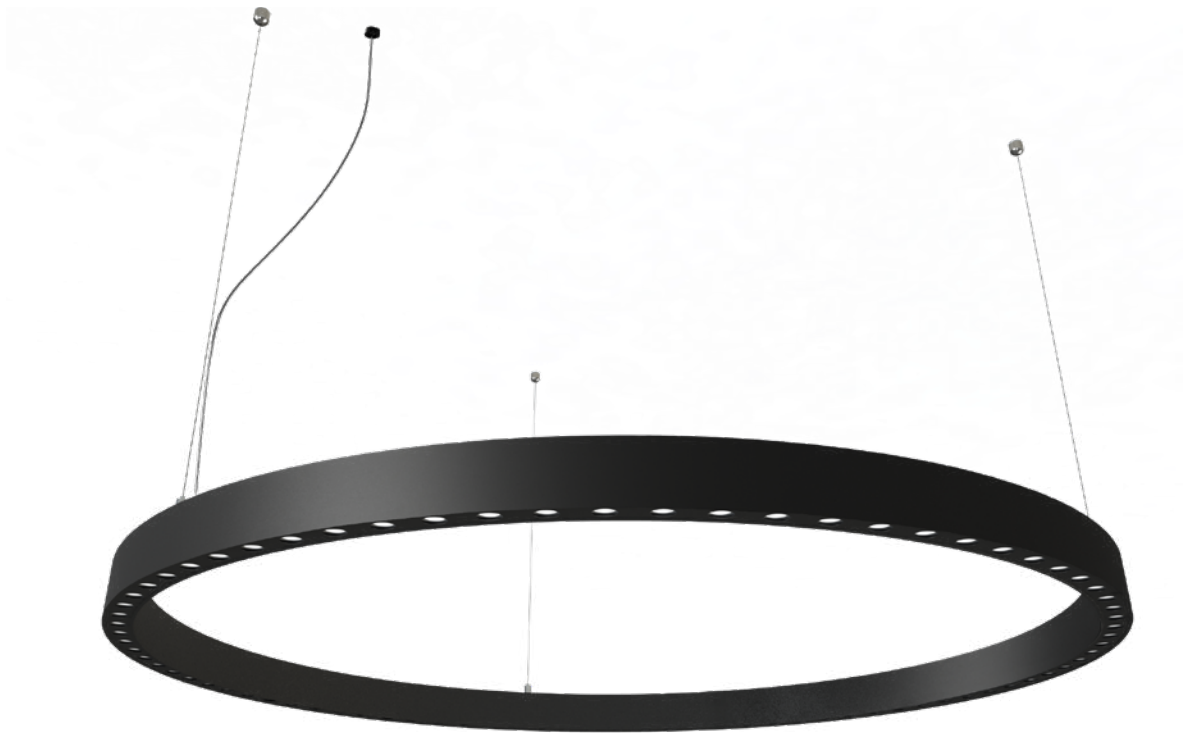

Zirkol UGR

Designed to minimize glare, it offers a discreet yet high-performance lighting solution.

Creato per garantire un ridotto abbagliamento luminoso, offre una soluzione discreta e dalle elevate prestazioni di illuminazione.



downlight

- power input
- metal cable



aluminium
structure profile

ZIRKOL CIRCLE UGR 1M | DALI

DOWNLIGHT										
CCT	max power	source	voltage	lum. flux	optic	CRI	switching	code	finish	
2700K	59W	flex LED strip 30°	24VDC	3505lm	30°	90	DALI	BZRC1610I42DNE	black	●
3000K	59W	flex LED strip 30°	24VDC	3894lm	30°	90	DALI	BZRC1610I42WNE	black	●
4000K	59W	flex LED strip 30°	24VDC	4327lm	30°	90	DALI	BZRC1610I42NNE	black	●
note	RAL 9005 black shipped assembled									
included	1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p.124-125 emission, control systems, finishes									

CE UK CA IP40 UGR<19

UP-DOWNLIGHT										
CCT	max power	source	voltage	lum. flux	optic	CRI	switching	code	finish	
2700K	104W	flex LED strip 30°+ LED strip	24VDC	5646lm	30°+ diffused	90	DALI	BZRC1710I42DNE	black	●
3000K	104W	flex LED strip 30°+ LED strip	24VDC	6274lm	30°+ diffused	90	DALI	BZRC1710I42WNE	black	●
4000K	104W	flex LED strip 30°+ LED strip	24VDC	6971lm	30°+ diffused	90	DALI	BZRC1710I42NNE	black	●
note	RAL 9005 black shipped assembled									
included	1 x driver 150W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p.124-125 emission, control systems, finishes									

CE UK CA IP40 UGR<19



anti-glare optics



ZIRKOL CIRCLE UGR 1,2M | DALI

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	optic	CRI	switching	code	finish
2700K	70W	flex LED strip 30°	24VDC	4130lm	30°	90	DALI	BZRC1612I42DNE	black ●
3000K	70W	flex LED strip 30°	24VDC	4620lm	30°	90	DALI	BZRC1612I42WNE	black ●
4000K	70W	flex LED strip 30°	24VDC	5110lm	30°	90	DALI	BZRC1612I42NNE	black ●
note	RAL 9005 black shipped assembled								
included	1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 emission, control systems, finishes								

CE UK CA IP40 UGR<19



UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	optic	CRI	switching	code	finish
2700K	124W	flex LED strip 30°+ LED strip	24VDC	6696lm	30°+ diffused	90	DALI	BZRC1712I42DNE	black ●
3000K	124W	flex LED strip 30°+ LED strip	24VDC	7440lm	30°+ diffused	90	DALI	BZRC1712I42WNE	black ●
4000K	124W	flex LED strip 30°+ LED strip	24VDC	8308lm	30°+ diffused	90	DALI	BZRC1712I42NNE	black ●
note	RAL 9005 black shipped assembled								
included	1 x driver 150W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 emission, control systems, finishes								

CE UK CA IP40 UGR<19



anti-glare optics



ZIRKOL ROUND UGR 1M | DALI

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	optic	CRI	switching	code	finish	
2700K	29,5W	flex LED strip 30°	24VDC	1753lm	30°	90	DALI	BZRR1610I42DNE	black	●
3000K	29,5W	flex LED strip 30°	24VDC	1947lm	30°	90	DALI	BZRR1610I42WNE	black	●
4000K	29,5W	flex LED strip 30°	24VDC	2163lm	30°	90	DALI	BZRR1610I42NNE	black	●
note	RAL 9005 black shipped assembled									
included	1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p.124-125 emission, control systems, finishes									

CE UK CA IP40 UGR<19



UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	optic	CRI	switching	code	finish	
2700K	52W	flex LED strip 30°+ LED strip	24VDC	2823lm	30°+ diffused	90	DALI	BZRR1710I42DNE	black	●
3000K	52W	flex LED strip 30°+ LED strip	24VDC	3137lm	30°+ diffused	90	DALI	BZRR1710I42WNE	black	●
4000K	52W	flex LED strip 30°+ LED strip	24VDC	3486lm	30°+ diffused	90	DALI	BZRR1710I42NNE	black	●
note	RAL 9005 black shipped assembled									
included	1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p.124-125 emission, control systems, finishes									

CE UK CA IP40 UGR<19



anti-glare optics



ZIRKOL ROUND UGR 1,2M | DALI

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	optic	CRI	switching	code	finish	
2700K	35W	flex LED strip 30°	24VDC	2565lm	30°	90	DALI	BZRR1612I42DNE	black	●
3000K	35W	flex LED strip 30°	24VDC	2310lm	30°	90	DALI	BZRR1612I42WNE	black	●
4000K	35W	flex LED strip 30°	24VDC	2555lm	30°	90	DALI	BZRR1612I42NNE	black	●
note	RAL 9005 black shipped assembled									
included	1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p.124-125 emission, control systems, finishes									

CE UK CA IP40 UGR<19

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	optic	CRI	switching	code	finish	
2700K	62W	flex LED strip 30°+ LED strip	24VDC	3348lm	30°+ diffused	90	DALI	BZRR1712I42DNE	black	●
3000K	62W	flex LED strip 30°+ LED strip	24VDC	3720lm	30°+ diffused	90	DALI	BZRR1712I42WNE	black	●
4000K	62W	flex LED strip 30°+ LED strip	24VDC	4154lm	30°+ diffused	90	DALI	BZRR1712I42NNE	black	●
note	RAL 9005 black shipped assembled									
included	1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included									
customizations	external electrical cable optional accessories on p.124-125 emission, control systems, finishes									

CE UK CA IP40 UGR<19



anti-glare optics





Zirkol Spot, black.
Luxembourg National Library, Turin

Pendant

Zirkol Square S

This solution features broken lines instead of curved corners, making it suitable for central placement within a room or for creating a light frame in a space.

Una soluzione che adotta linee spezzate invece di angoli curvi. Nato per essere disposto al centro di ambienti o per creare una cornice di luce negli spazi.

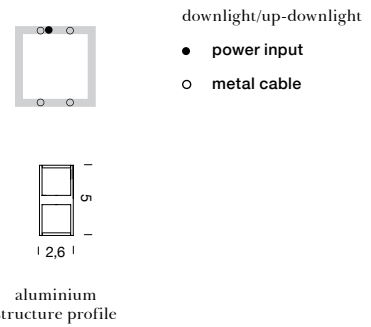

ZIRKOL SQUARE S 1m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	58W	LED strip	24V	3330lm	90	DALI	BZRA1610G15DBO	white	○
2700K	58W	LED strip	24V	3330lm	90	DALI	BZRA1610G15DNE	black	●
2700K	58W	LED strip	24V	3330lm	90	DALI	BZRA1610G15DOR	gold	●
3000K	58W	LED strip	24V	3525lm	90	DALI	BZRA1610G15WBO	white	○
3000K	58W	LED strip	24V	3525lm	90	DALI	BZRA1610G15WNE	black	●
3000K	58W	LED strip	24V	3525lm	90	DALI	BZRA1610G15WOR	gold	●
4000K	58W	LED strip	24V	3920lm	90	DALI	BZRA1610G15NBO	white	○
4000K	58W	LED strip	24V	3920lm	90	DALI	BZRA1610G15NNE	black	●
4000K	58W	LED strip	24V	3920lm	90	DALI	BZRA1610G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	116W	LED strip	24V	6660lm	90	DALI	BZRA1710G15DBO	white	○
2700K	116W	LED strip	24V	6660lm	90	DALI	BZRA1710G15DNE	black	●
2700K	116W	LED strip	24V	6660lm	90	DALI	BZRA1710G15DOR	gold	●
3000K	116W	LED strip	24V	7050lm	90	DALI	BZRA1710G15WBO	white	○
3000K	116W	LED strip	24V	7050lm	90	DALI	BZRA1710G15WNE	black	●
3000K	116W	LED strip	24V	7050lm	90	DALI	BZRA1710G15WOR	gold	●
4000K	116W	LED strip	24V	7840lm	90	DALI	BZRA1710G15NBO	white	○
4000K	116W	LED strip	24V	7840lm	90	DALI	BZRA1710G15NNE	black	●
4000K	116W	LED strip	24V	7840lm	90	DALI	BZRA1710G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	remote driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

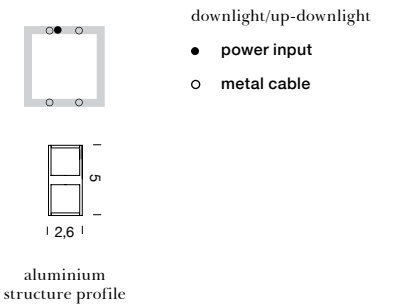

ZIRKOL SQUARE S 1,5m | DALI

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	87W	LED strip	24V	5000lm	90	DALI	BZRA1615G15DBO	white	○
2700K	87W	LED strip	24V	5000lm	90	DALI	BZRA1615G15DNE	black	●
2700K	87W	LED strip	24V	5000lm	90	DALI	BZRA1615G15DOR	gold	●
3000K	87W	LED strip	24V	5290lm	90	DALI	BZRA1615G15WBO	white	○
3000K	87W	LED strip	24V	5290lm	90	DALI	BZRA1615G15WNE	black	●
3000K	87W	LED strip	24V	5290lm	90	DALI	BZRA1615G15WOR	gold	●
4000K	87W	LED strip	24V	5880lm	90	DALI	BZRA1615G15NBO	white	○
4000K	87W	LED strip	24V	5880lm	90	DALI	BZRA1615G15NNE	black	●
4000K	87W	LED strip	24V	5880lm	90	DALI	BZRA1615G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	remote driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	174W	LED strip	24V	10000lm	90	DALI	BZRA1715G15DBO	white	○
2700K	174W	LED strip	24V	10000lm	90	DALI	BZRA1715G15DNE	black	●
2700K	174W	LED strip	24V	10000lm	90	DALI	BZRA1715G15DOR	gold	●
3000K	174W	LED strip	24V	10480lm	90	DALI	BZRA1715G15WBO	white	○
3000K	174W	LED strip	24V	10480lm	90	DALI	BZRA1715G15WNE	black	●
3000K	174W	LED strip	24V	10480lm	90	DALI	BZRA1715G15WOR	gold	●
4000K	174W	LED strip	24V	11760lm	90	DALI	BZRA1715G15NBO	white	○
4000K	174W	LED strip	24V	11760lm	90	DALI	BZRA1715G15NNE	black	●
4000K	174W	LED strip	24V	11760lm	90	DALI	BZRA1715G15NOR	gold	●
note	RAL 9005 black RAL 9016 white shipped assembled								
included	remote driver 250W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included								
customizations	external electrical cable optional accessories on p.124-125 lighting options, emission, control systems, finishes								

CE UK CA IP40




Pendant

Zirkol Square Q


It combines simplicity and elegance in a closed shape available in various sizes, providing a wide range of solutions for spaces of different dimensions.

Combina semplicità ed eleganza in una forma chiusa disponibile in diverse misure, offrendo un'ampia gamma di soluzioni per spazi di varie dimensioni.



downlight/up-downlight

- power input
- metal cable
- split

aluminium
structure profile

ZIRKOL SQUARE Q 1,5 x 1,5m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	77W	LED strip	24V	4432lm	90	DALI	BZRQ1606G15DBO	white	○
2700K	77W	LED strip	24V	4432lm	90	DALI	BZRQ1606G15DNE	black	●
2700K	77W	LED strip	24V	4432lm	90	DALI	BZRQ1606G15DOR	gold	●
3000K	77W	LED strip	24V	4692lm	90	DALI	BZRQ1606G15WBO	white	○
3000K	77W	LED strip	24V	4692lm	90	DALI	BZRQ1606G15WNE	black	●
3000K	77W	LED strip	24V	4692lm	90	DALI	BZRQ1606G15WOR	gold	●
4000K	77W	LED strip	24V	5214lm	90	DALI	BZRQ1606G15NBO	white	○
4000K	77W	LED strip	24V	5214lm	90	DALI	BZRQ1606G15NNE	black	●
4000K	77W	LED strip	24V	5214lm	90	DALI	BZRQ1606G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped assembled								
included	1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	154W	LED strip	24V	8863lm	90	DALI	BZRQ1712G15DBO	white	○
2700K	154W	LED strip	24V	8863lm	90	DALI	BZRQ1712G15DNE	black	●
2700K	154W	LED strip	24V	8863lm	90	DALI	BZRQ1712G15DOR	gold	●
3000K	154W	LED strip	24V	9384lm	90	DALI	BZRQ1712G15WBO	white	○
3000K	154W	LED strip	24V	9384lm	90	DALI	BZRQ1712G15WNE	black	●
3000K	154W	LED strip	24V	9384lm	90	DALI	BZRQ1712G15WOR	gold	●
4000K	154W	LED strip	24V	10427lm	90	DALI	BZRQ1712G15NBO	white	○
4000K	154W	LED strip	24V	10427lm	90	DALI	BZRQ1712G15NNE	black	●
4000K	154W	LED strip	24V	10427lm	90	DALI	BZRQ1712G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped assembled								
included	1 x driver 250W (220/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

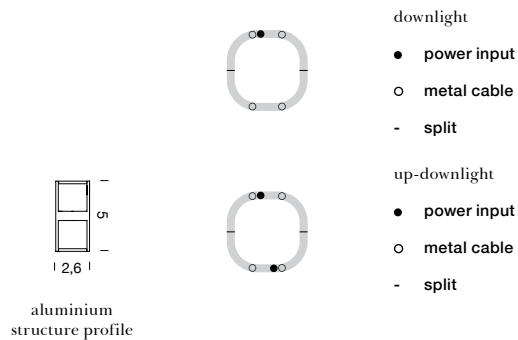



ZIRKOL SQUARE Q 2 x 2m | DALI

DOWNLIGHT									
CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	105W	LED strip	24V	6098lm	90	DALI	BZRQ1608G15DBO	white	○
2700K	105W	LED strip	24V	6098lm	90	DALI	BZRQ1608G15DNE	black	●
2700K	105W	LED strip	24V	6098lm	90	DALI	BZRQ1608G15DOR	gold	●
3000K	105W	LED strip	24V	6456lm	90	DALI	BZRQ1608G15WBO	white	○
3000K	105W	LED strip	24V	6456lm	90	DALI	BZRQ1608G15WNE	black	●
3000K	105W	LED strip	24V	6456lm	90	DALI	BZRQ1608G15WOR	gold	●
4000K	105W	LED strip	24V	7174lm	90	DALI	BZRQ1608G15NBO	white	○
4000K	105W	LED strip	24V	7174lm	90	DALI	BZRQ1608G15NNE	black	●
4000K	105W	LED strip	24V	7174lm	90	DALI	BZRQ1608G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces								
included	1 x driver 150W (220/240V) 1 x dimmer DAL 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT									
CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	211W	LED strip	24V	12195lm	90	DALI	BZRQ1716G15DBO	white	○
2700K	211W	LED strip	24V	12195lm	90	DALI	BZRQ1716G15DNE	black	●
2700K	211W	LED strip	24V	12195lm	90	DALI	BZRQ1716G15DOR	gold	●
3000K	211W	LED strip	24V	12912lm	90	DALI	BZRQ1716G15WBO	white	○
3000K	211W	LED strip	24V	12912lm	90	DALI	BZRQ1716G15WNE	black	●
3000K	211W	LED strip	24V	12912lm	90	DALI	BZRQ1716G15WOR	gold	●
4000K	211W	LED strip	24V	14347lm	90	DALI	BZRQ1716G15NBO	white	○
4000K	211W	LED strip	24V	14347lm	90	DALI	BZRQ1716G15NNE	black	●
4000K	211W	LED strip	24V	14347lm	90	DALI	BZRQ1716G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces								
included	1 x driver 250W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40



aluminium
structure profile

downlight/up-downlight

- power input
- metal cable
- split

ZIRKOL SQUARE Q 3 x 2m | DALI

DOWNLIGHT




CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	134W	LED strip	24V	7764lm	90	DALI	BZRQ1610G15DBO	white	○
2700K	134W	LED strip	24V	7764lm	90	DALI	BZRQ1610G15DNE	black	●
2700K	134W	LED strip	24V	7764lm	90	DALI	BZRQ1610G15DOR	gold	●
3000K	134W	LED strip	24V	8220lm	90	DALI	BZRQ1610G15WBO	white	○
3000K	134W	LED strip	24V	8220lm	90	DALI	BZRQ1610G15WNE	black	●
3000K	134W	LED strip	24V	8220lm	90	DALI	BZRQ1610G15WOR	gold	●
4000K	134W	LED strip	24V	9134lm	90	DALI	BZRQ1610G15NBO	white	○
4000K	134W	LED strip	24V	9134lm	90	DALI	BZRQ1610G15NNE	black	●
4000K	134W	LED strip	24V	9134lm	90	DALI	BZRQ1610G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces								
included	1 x driver 150W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	268W	LED strip	24V	15527lm	90	DALI	BZRQ1720G15DBO	white	○
2700K	268W	LED strip	24V	15527lm	90	DALI	BZRQ1720G15DNE	black	●
2700K	268W	LED strip	24V	15527lm	90	DALI	BZRQ1720G15DOR	gold	●
3000K	268W	LED strip	24V	16440lm	90	DALI	BZRQ1720G15WBO	white	○
3000K	268W	LED strip	24V	16440lm	90	DALI	BZRQ1720G15WNE	black	●
3000K	268W	LED strip	24V	16440lm	90	DALI	BZRQ1720G15WOR	gold	●
4000K	268W	LED strip	24V	18267lm	90	DALI	BZRQ1720G15NBO	white	○
4000K	268W	LED strip	24V	18267lm	90	DALI	BZRQ1720G15NNE	black	●
4000K	268W	LED strip	24V	18267lm	90	DALI	BZRQ1720G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces								
included	2 x drivers 150W (220/240V) 2 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

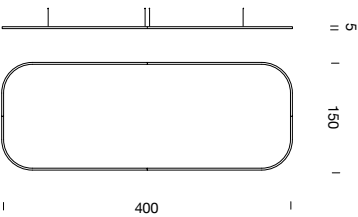

aluminium
structure profile

downlight/up-downlight

- power input
- metal cable
- split

ZIRKOL SQUARE Q 4 x 1,5m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	149W	LED strip	24V	8597lm	90	DALI	BZRQ1611G15DBO	white	○
2700K	149W	LED strip	24V	8597lm	90	DALI	BZRQ1611G15DNE	black	●
2700K	149W	LED strip	24V	8597lm	90	DALI	BZRQ1611G15DOR	gold	●
3000K	149W	LED strip	24V	9102lm	90	DALI	BZRQ1611G15WBO	white	○
3000K	149W	LED strip	24V	9102lm	90	DALI	BZRQ1611G15WNE	black	●
3000K	149W	LED strip	24V	9102lm	90	DALI	BZRQ1611G15WOR	gold	●
4000K	149W	LED strip	24V	10114lm	90	DALI	BZRQ1611G15NBO	white	○
4000K	149W	LED strip	24V	10114lm	90	DALI	BZRQ1611G15NNE	black	●
4000K	149W	LED strip	24V	10114lm	90	DALI	BZRQ1611G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	2 x driver 100W (110/240V) 2 x dimmer DALI 4 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	297W	LED strip	24V	17193lm	90	DALI	BZRQ1722G15DBO	white	○
2700K	297W	LED strip	24V	17193lm	90	DALI	BZRQ1722G15DNE	black	●
2700K	297W	LED strip	24V	17193lm	90	DALI	BZRQ1722G15DOR	gold	●
3000K	297W	LED strip	24V	18204lm	90	DALI	BZRQ1722G15WBO	white	○
3000K	297W	LED strip	24V	18204lm	90	DALI	BZRQ1722G15WNE	black	●
3000K	297W	LED strip	24V	18204lm	90	DALI	BZRQ1722G15WOR	gold	●
4000K	297W	LED strip	24V	20227lm	90	DALI	BZRQ1722G15NBO	white	○
4000K	297W	LED strip	24V	20227lm	90	DALI	BZRQ1722G15NNE	black	●
4000K	297W	LED strip	24V	20227lm	90	DALI	BZRQ1722G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	2 x drivers 150W (220/240V) 2 x dimmer DALI 4 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

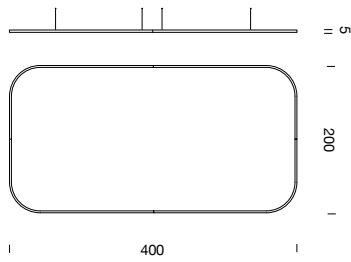

aluminium
structure profile

downlight/up-downlight

- power input
- metal cable
- split

ZIRKOL SQUARE Q 4 x 2m | DALI

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	163W	LED strip	24V	9430lm	90	DALI	BZRQ1612G15DBO	white	○
2700K	163W	LED strip	24V	9430lm	90	DALI	BZRQ1612G15DNE	black	●
2700K	163W	LED strip	24V	9430lm	90	DALI	BZRQ1612G15DOR	gold	●
3000K	163W	LED strip	24V	9984lm	90	DALI	BZRQ1612G15WBO	white	○
3000K	163W	LED strip	24V	9984lm	90	DALI	BZRQ1612G15WNE	black	●
3000K	163W	LED strip	24V	9984lm	90	DALI	BZRQ1612G15WOR	gold	●
4000K	163W	LED strip	24V	11094lm	90	DALI	BZRQ1612G15NBO	white	○
4000K	163W	LED strip	24V	11094lm	90	DALI	BZRQ1612G15NNE	black	●
4000K	163W	LED strip	24V	11094lm	90	DALI	BZRQ1612G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	2 x driver 100W (110/240V) 2 x dimmer DALI 4 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	326W	LED strip	24V	18859lm	90	DALI	BZRQ1724G15DBO	white	○
2700K	326W	LED strip	24V	18859lm	90	DALI	BZRQ1724G15DNE	black	●
2700K	326W	LED strip	24V	18859lm	90	DALI	BZRQ1724G15DOR	gold	●
3000K	326W	LED strip	24V	19968lm	90	DALI	BZRQ1724G15WBO	white	○
3000K	326W	LED strip	24V	19968lm	90	DALI	BZRQ1724G15WNE	black	●
3000K	326W	LED strip	24V	19968lm	90	DALI	BZRQ1724G15WOR	gold	●
4000K	326W	LED strip	24V	22187lm	90	DALI	BZRQ1724G15NBO	white	○
4000K	326W	LED strip	24V	22187lm	90	DALI	BZRQ1724G15NNE	black	●
4000K	326W	LED strip	24V	22187lm	90	DALI	BZRQ1724G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	2 x driver 250W (220/240V) 2 x dimmer DALI 4 x electrical cable length 5m 6 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40








Pendant

Zirkol Oval

Zirkol Oval completes the range of closed curved shapes, offering a wide selection of sizes and shapes.

Zirkol Oval completa la gamma delle linee curve chiuse, offrendo una vasta scelta di dimensioni e forme.



- downlight
- power input
 - metal cable
- up-downlight
- power input
 - metal cable

ZIRKOL OVAL 2 x 1m | DALI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	74W	LED strip	24V	4282lm	90	DALI	BZRO16A20G15DBO	white	○
2700K	74W	LED strip	24V	4282lm	90	DALI	BZRO16A20G15DNE	black	●
2700K	74W	LED strip	24V	4282lm	90	DALI	BZRO16A20G15DOR	gold	●
3000K	74W	LED strip	24V	4533lm	90	DALI	BZRO16A20G15WBO	white	○
3000K	74W	LED strip	24V	4533lm	90	DALI	BZRO16A20G15WNE	black	●
3000K	74W	LED strip	24V	4533lm	90	DALI	BZRO16A20G15WOR	gold	●
4000K	74W	LED strip	24V	5037lm	90	DALI	BZRO16A20G15NBO	white	○
4000K	74W	LED strip	24V	5037lm	90	DALI	BZRO16A20G15NNE	black	●
4000K	74W	LED strip	24V	5037lm	90	DALI	BZRO16A20G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped assembled								
included	1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	148W	LED strip	24V	8563lm	90	DALI	BZRO17A20G15DBO	white	○
2700K	148W	LED strip	24V	8563lm	90	DALI	BZRO17A20G15DNE	black	●
2700K	148W	LED strip	24V	8563lm	90	DALI	BZRO17A20G15DOR	gold	●
3000K	148W	LED strip	24V	9067lm	90	DALI	BZRO17A20G15WBO	white	○
3000K	148W	LED strip	24V	9067lm	90	DALI	BZRO17A20G15WNE	black	●
3000K	148W	LED strip	24V	9067lm	90	DALI	BZRO17A20G15WOR	gold	●
4000K	148W	LED strip	24V	10074lm	90	DALI	BZRO17A20G15NBO	white	○
4000K	148W	LED strip	24V	10074lm	90	DALI	BZRO17A20G15NNE	black	●
4000K	148W	LED strip	24V	10074lm	90	DALI	BZRO17A20G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped assembled								
included	1 x driver 150W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

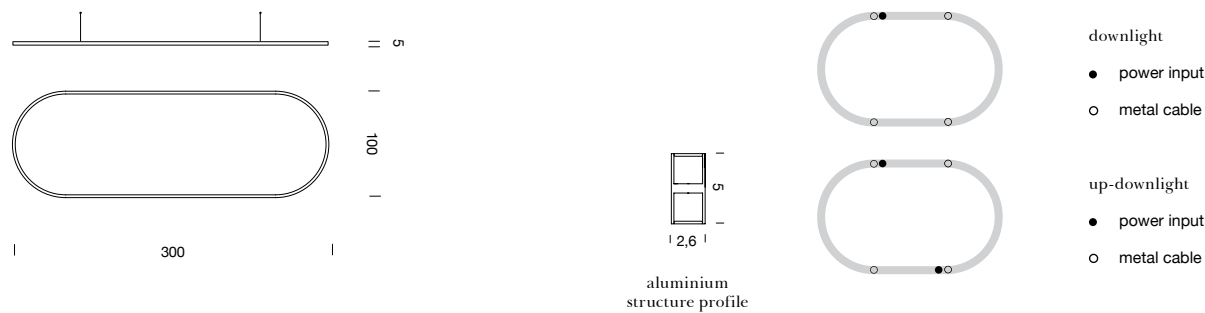

ZIRKOL OVAL 3 x 1m | DALI

DOWNLIGHT




CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	103W	LED strip	24V	5948lm	90	DALI	BZRO16A30G15DBO	white	○
2700K	103W	LED strip	24V	5948lm	90	DALI	BZRO16A30G15DNE	black	●
2700K	103W	LED strip	24V	5948lm	90	DALI	BZRO16A30G15DOR	gold	●
3000K	103W	LED strip	24V	6297lm	90	DALI	BZRO16A30G15WBO	white	○
3000K	103W	LED strip	24V	6297lm	90	DALI	BZRO16A30G15WNE	black	●
3000K	103W	LED strip	24V	6297lm	90	DALI	BZRO16A30G15WOR	gold	●
4000K	103W	LED strip	24V	6997lm	90	DALI	BZRO16A30G15NBO	white	○
4000K	103W	LED strip	24V	6997lm	90	DALI	BZRO16A30G15NNE	black	●
4000K	103W	LED strip	24V	6997lm	90	DALI	BZRO16A30G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped assembled								
included	1 x driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	206W	LED strip	24V	11895lm	90	DALI	BZRO17A30G15DBO	white	○
2700K	206W	LED strip	24V	11895lm	90	DALI	BZRO17A30G15DNE	black	●
2700K	206W	LED strip	24V	11895lm	90	DALI	BZRO17A30G15DOR	gold	●
3000K	206W	LED strip	24V	12595lm	90	DALI	BZRO17A30G15WBO	white	○
3000K	206W	LED strip	24V	12595lm	90	DALI	BZRO17A30G15WNE	black	●
3000K	206W	LED strip	24V	12595lm	90	DALI	BZRO17A30G15WOR	gold	●
4000K	206W	LED strip	24V	13994lm	90	DALI	BZRO17A30G15NBO	white	○
4000K	206W	LED strip	24V	13994lm	90	DALI	BZRO17A30G15NNE	black	●
4000K	206W	LED strip	24V	13994lm	90	DALI	BZRO17A30G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped assembled								
included	1 x driver 250W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40



downlight

- power input
- metal cable
- split

up-downlight

- power input
- metal cable
- split

ZIRKOL OVAL 2,5 x 1,5m | DALI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	97W	LED strip	24V	5589lm	90	DALI	BZRO16B25G15DBO	white	○
2700K	97W	LED strip	24V	5589lm	90	DALI	BZRO16B25G15DNE	black	●
2700K	97W	LED strip	24V	5589lm	90	DALI	BZRO16B25G15DOR	gold	●
3000K	97W	LED strip	24V	5918lm	90	DALI	BZRO16B25G15WBO	white	○
3000K	97W	LED strip	24V	5918lm	90	DALI	BZRO16B25G15WNE	black	●
3000K	97W	LED strip	24V	5918lm	90	DALI	BZRO16B25G15WOR	gold	●
4000K	97W	LED strip	24V	6576lm	90	DALI	BZRO16B25G15NBO	white	○
4000K	97W	LED strip	24V	6576lm	90	DALI	BZRO16B25G15NNE	black	●
4000K	97W	LED strip	24V	6576lm	90	DALI	BZRO16B25G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	1 x driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	193W	LED strip	24V	11179lm	90	DALI	BZRO17B25G15DBO	white	○
2700K	193W	LED strip	24V	11179lm	90	DALI	BZRO17B25G15DNE	black	●
2700K	193W	LED strip	24V	11179lm	90	DALI	BZRO17B25G15DOR	gold	●
3000K	193W	LED strip	24V	11836lm	90	DALI	BZRO17B25G15WBO	white	○
3000K	193W	LED strip	24V	11836lm	90	DALI	BZRO17B25G15WNE	black	●
3000K	193W	LED strip	24V	11836lm	90	DALI	BZRO17B25G15WOR	gold	●
4000K	193W	LED strip	24V	13152lm	90	DALI	BZRO17B25G15NBO	white	○
4000K	193W	LED strip	24V	13152lm	90	DALI	BZRO17B25G15NNE	black	●
4000K	193W	LED strip	24V	13152lm	90	DALI	BZRO17B25G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	2 x driver 100W (110/240V) 2 x dimmer DALI 4 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

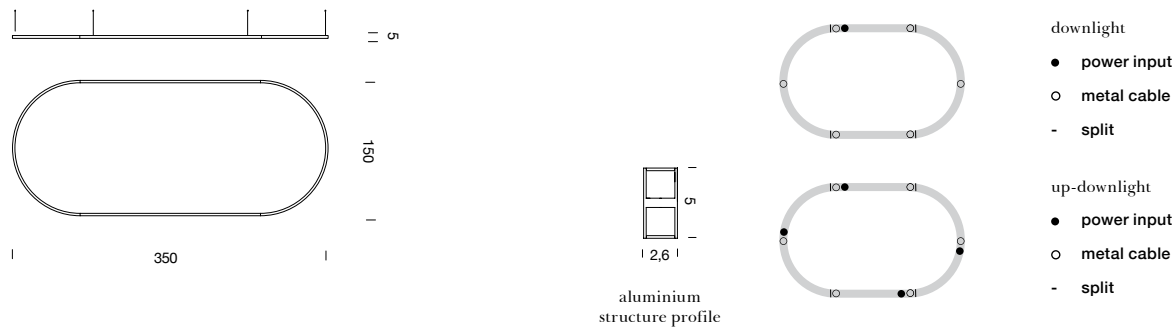

ZIRKOL OVAL 3,5 x 1,5m | DALI

DOWNLIGHT



CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	125W	LED strip	24V	7255lm	90	DALI	BZRO16B35G15DBO	white	○
2700K	125W	LED strip	24V	7255lm	90	DALI	BZRO16B35G15DNE	black	●
2700K	125W	LED strip	24V	7255lm	90	DALI	BZRO16B35G15DOR	gold	●
3000K	125W	LED strip	24V	7682lm	90	DALI	BZRO16B35G15WBO	white	○
3000K	125W	LED strip	24V	7682lm	90	DALI	BZRO16B35G15WNE	black	●
3000K	125W	LED strip	24V	7682lm	90	DALI	BZRO16B35G15WOR	gold	●
4000K	125W	LED strip	24V	8536lm	90	DALI	BZRO16B35G15NBO	white	○
4000K	125W	LED strip	24V	8536lm	90	DALI	BZRO16B35G15NNE	black	●
4000K	125W	LED strip	24V	8536lm	90	DALI	BZRO16B35G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	1 x driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	251W	LED strip	24V	14511lm	90	DALI	BZRO17B35G15DBO	white	○
2700K	251W	LED strip	24V	14511lm	90	DALI	BZRO17B35G15DNE	black	●
2700K	251W	LED strip	24V	14511lm	90	DALI	BZRO17B35G15DOR	gold	●
3000K	251W	LED strip	24V	15364lm	90	DALI	BZRO17B35G15WBO	white	○
3000K	251W	LED strip	24V	15364lm	90	DALI	BZRO17B35G15WNE	black	●
3000K	251W	LED strip	24V	15364lm	90	DALI	BZRO17B35G15WOR	gold	●
4000K	251W	LED strip	24V	17072lm	90	DALI	BZRO17B35G15NBO	white	○
4000K	251W	LED strip	24V	17072lm	90	DALI	BZRO17B35G15NNE	black	●
4000K	251W	LED strip	24V	17072lm	90	DALI	BZRO17B35G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	2 x drivers 150W (220/240V) 2 x dimmer DALI 4 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

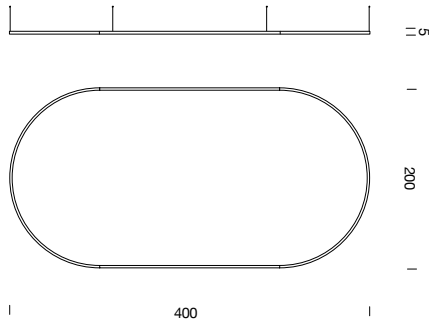

downlight/up-downlight

- power input
- metal cable
- split

aluminium
structure profile

ZIRKOL OVAL 4 x 2m | DALI

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	148W	LED strip	24V	8536lm	90	DALI	BZRO16C40G15DBO	white	○
2700K	148W	LED strip	24V	8536lm	90	DALI	BZRO16C40G15DNE	black	●
2700K	148W	LED strip	24V	8536lm	90	DALI	BZRO16C40G15DOR	gold	●
3000K	148W	LED strip	24V	9067lm	90	DALI	BZRO16C40G15WBO	white	○
3000K	148W	LED strip	24V	9067lm	90	DALI	BZRO16C40G15WNE	black	●
3000K	148W	LED strip	24V	9067lm	90	DALI	BZRO16C40G15WOR	gold	●
4000K	148W	LED strip	24V	10074lm	90	DALI	BZRO16C40G15NBO	white	○
4000K	148W	LED strip	24V	10074lm	90	DALI	BZRO16C40G15NNE	black	●
4000K	148W	LED strip	24V	10074lm	90	DALI	BZRO16C40G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	2 x driver 100W (110/240V) 2 x dimmer DALI 4 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								


CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	296W	LED strip	24V	17126lm	90	DALI	BZRO17C40G15DBO	white	○
2700K	296W	LED strip	24V	17126lm	90	DALI	BZRO17C40G15DNE	black	●
2700K	296W	LED strip	24V	17126lm	90	DALI	BZRO17C40G15DOR	gold	●
3000K	296W	LED strip	24V	18134lm	90	DALI	BZRO17C40G15WBO	white	○
3000K	296W	LED strip	24V	18134lm	90	DALI	BZRO17C40G15WNE	black	●
3000K	296W	LED strip	24V	18134lm	90	DALI	BZRO17C40G15WOR	gold	●
4000K	296W	LED strip	24V	20149lm	90	DALI	BZRO17C40G15NBO	white	○
4000K	296W	LED strip	24V	20149lm	90	DALI	BZRO17C40G15NNE	black	●
4000K	296W	LED strip	24V	20149lm	90	DALI	BZRO17C40G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped in 4 pieces								
included	2 x drivers 150W (220/240V) 2 x dimmer DALI 4 x electrical cable 5m 6 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40




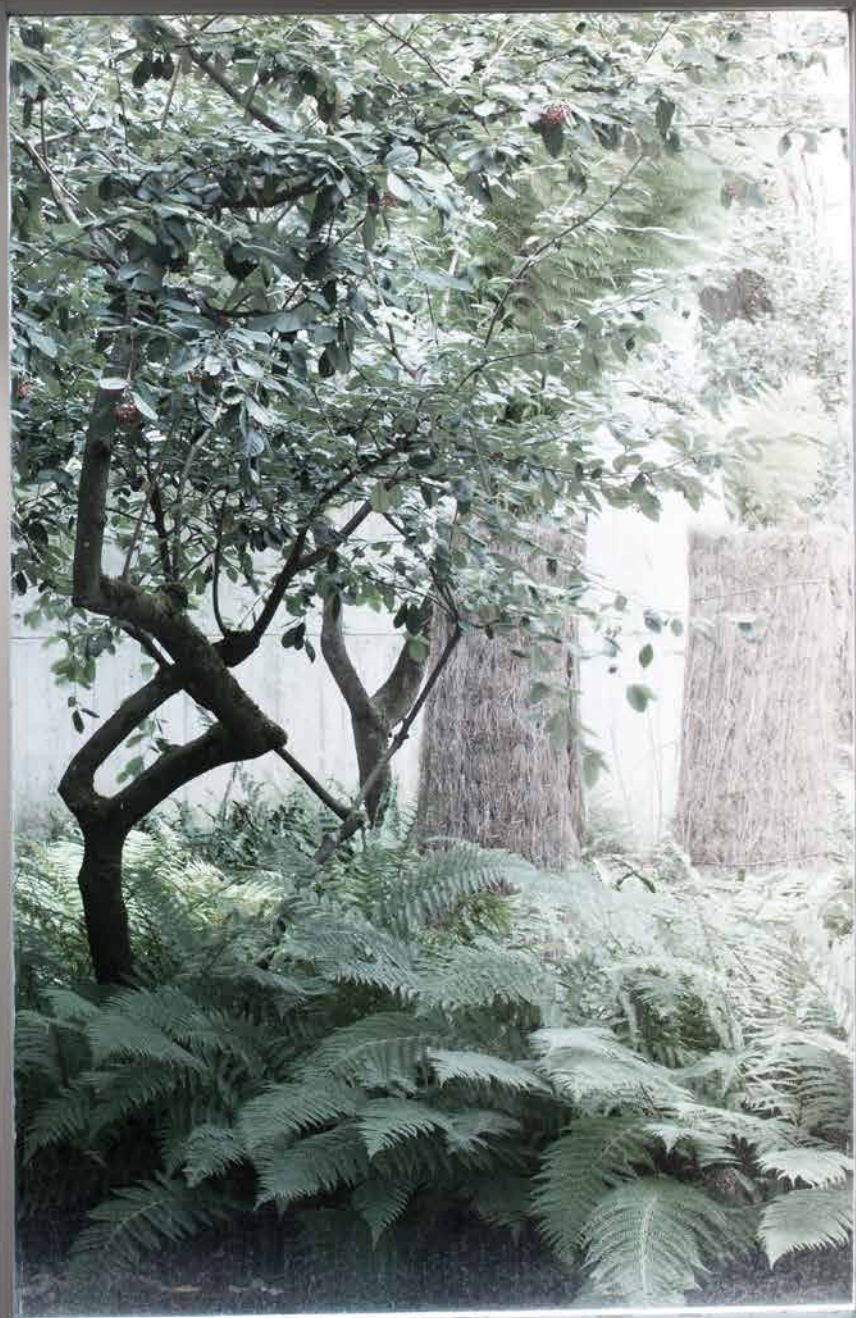


Linear

Zirkol Linear

Zirkol Linear is ideal for multiple applications, offering downlight, indirect, and UGR lighting. It is available with both wall and track mounting options.

Zirkol Linear è ideale per diverse soluzioni, offrendo illuminazione downlight, uplight e UGR. È disponibile con opzioni di fissaggio a parete e a binario.

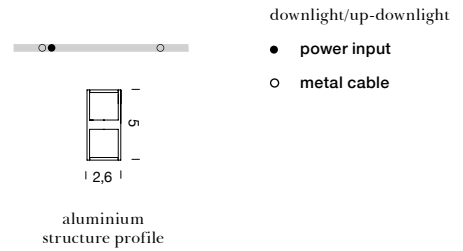

ZIRKOL LINEAR 1m | DALI

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	14,5W	LED strip	24V	833lm	90	DALI	BZRL1610G15DBO	white	○
2700K	14,5W	LED strip	24V	833lm	90	DALI	BZRL1610G15DNE	black	●
2700K	14,5W	LED strip	24V	833lm	90	DALI	BZRL1610G15DOR	gold	●
3000K	14,5W	LED strip	24V	882lm	90	DALI	BZRL1610G15WBO	white	○
3000K	14,5W	LED strip	24V	882lm	90	DALI	BZRL1610G15WNE	black	●
3000K	14,5W	LED strip	24V	882lm	90	DALI	BZRL1610G15WOR	gold	●
4000K	14,5W	LED strip	24V	980lm	90	DALI	BZRL1610G15NBO	white	○
4000K	14,5W	LED strip	24V	980lm	90	DALI	BZRL1610G15NNE	black	●
4000K	14,5W	LED strip	24V	980lm	90	DALI	BZRL1610G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped assembled								
included	1 x driver 20W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 x adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	29W	LED strip	24V	1666lm	90	DALI	BZRL1710G15DBO	white	○
2700K	29W	LED strip	24V	1666lm	90	DALI	BZRL1710G15DNE	black	●
2700K	29W	LED strip	24V	1666lm	90	DALI	BZRL1710G15DOR	gold	●
3000K	29W	LED strip	24V	1764lm	90	DALI	BZRL1710G15WBO	white	○
3000K	29W	LED strip	24V	1764lm	90	DALI	BZRL1710G15WNE	black	●
3000K	29W	LED strip	24V	1764lm	90	DALI	BZRL1710G15WOR	gold	●
4000K	29W	LED strip	24V	1960lm	90	DALI	BZRL1710G15NBO	white	○
4000K	29W	LED strip	24V	1960lm	90	DALI	BZRL1710G15NNE	black	●
4000K	29W	LED strip	24V	1960lm	90	DALI	BZRL1710G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped assembled								
included	1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40



ZIRKOL LINEAR 2m | DALI

DOWNLIGHT


CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	29W	LED strip	24V	1666lm	90	DALI	BZRL1620G15DBO	white	○
2700K	29W	LED strip	24V	1666lm	90	DALI	BZRL1620G15DNE	black	●
2700K	29W	LED strip	24V	1666lm	90	DALI	BZRL1620G15DOR	gold	●
3000K	29W	LED strip	24V	1764lm	90	DALI	BZRL1620G15WBO	white	○
3000K	29W	LED strip	24V	1764lm	90	DALI	BZRL1620G15WNE	black	●
3000K	29W	LED strip	24V	1764lm	90	DALI	BZRL1620G15WOR	gold	●
4000K	29W	LED strip	24V	1960lm	90	DALI	BZRL1620G15NBO	white	○
4000K	29W	LED strip	24V	1960lm	90	DALI	BZRL1620G15NNE	black	●
4000K	29W	LED strip	24V	1960lm	90	DALI	BZRL1620G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped assembled								
included	1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	58W	LED strip	24V	3332lm	90	DALI	BZRL1720G15DBO	white	○
2700K	58W	LED strip	24V	3332lm	90	DALI	BZRL1720G15DNE	black	●
2700K	58W	LED strip	24V	3332lm	90	DALI	BZRL1720G15DOR	gold	●
3000K	58W	LED strip	24V	3528lm	90	DALI	BZRL1720G15WBO	white	○
3000K	58W	LED strip	24V	3528lm	90	DALI	BZRL1720G15WNE	black	●
3000K	58W	LED strip	24V	3528lm	90	DALI	BZRL1720G15WOR	gold	●
4000K	58W	LED strip	24V	3920lm	90	DALI	BZRL1720G15NBO	white	○
4000K	58W	LED strip	24V	3920lm	90	DALI	BZRL1720G15NNE	black	●
4000K	58W	LED strip	24V	3920lm	90	DALI	BZRL1720G15NOR	gold	●
note	remote driver RAL 9005 black RAL 9016 white shipped assembled								
included	1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment)								
optional accessory	driver box ceiling plate for remote driver (more specification on p.124-125)								
customizations	lighting options, emission, control systems, finishes								

CE UK CA IP40

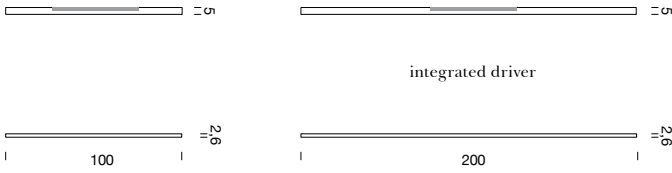

ZIRKOL LINEAR CEILING 1m | ON/OFF

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	28W	LED strip	220/240V	1900lm	90	ON/OFF	BZRLU410G15DBO	white	○
2700K	28W	LED strip	220/240V	1900lm	90	ON/OFF	BZRLU410G15DNE	black	●
2700K	28W	LED strip	220/240V	1900lm	90	ON/OFF	BZRLU410G15DOR	gold	●
3000K	28W	LED strip	220/240V	2000lm	90	ON/OFF	BZRLU410G15WBO	white	○
3000K	28W	LED strip	220/240V	2000lm	90	ON/OFF	BZRLU410G15WNE	black	●
3000K	28W	LED strip	220/240V	2000lm	90	ON/OFF	BZRLU410G15WOR	gold	●
4000K	28W	LED strip	220/240V	2100lm	90	ON/OFF	BZRLU410G15NBO	white	○
4000K	28W	LED strip	220/240V	2100lm	90	ON/OFF	BZRLU410G15NNE	black	●
4000K	28W	LED strip	220/240V	2100lm	90	ON/OFF	BZRLU410G15NOR	gold	●
note	integrated driver RAL 9005 black RAL 9016 white								
included	1 x driver Ultraslim 60W (220/240V)								
customizations	length								

CE UK CA IP40

ZIRKOL LINEAR CEILING 2m | ON/OFF

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	56W	LED strip	220/240V	3800lm	90	ON/OFF	BZRLU420G15DBO	white	○
2700K	56W	LED strip	220/240V	3800lm	90	ON/OFF	BZRLU420G15DNE	black	●
2700K	56W	LED strip	220/240V	3800lm	90	ON/OFF	BZRLU420G15DOR	gold	●
3000K	56W	LED strip	220/240V	4000lm	90	ON/OFF	BZRLU420G15WBO	white	○
3000K	56W	LED strip	220/240V	4000lm	90	ON/OFF	BZRLU420G15WNE	black	●
3000K	56W	LED strip	220/240V	4000lm	90	ON/OFF	BZRLU420G15WOR	gold	●
4000K	56W	LED strip	220/240V	4200lm	90	ON/OFF	BZRLU420G15NBO	white	○
4000K	56W	LED strip	220/240V	4200lm	90	ON/OFF	BZRLU420G15NNE	black	●
4000K	56W	LED strip	220/240V	4200lm	90	ON/OFF	BZRLU420G15NOR	gold	●
note	integrated driver RAL 9005 black RAL 9016 white								
included	1 x driver Ultraslim 60W (220/240V)								
customizations	length								

CE UK CA IP40



ZIRKOL LINEAR WALL 1m | ON/OFF

DIRECT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	14,5W	LED strip	220/240V	833lm	90	ON/OFF	BZRL4010G15DBO	white	○
2700K	14,5W	LED strip	220/240V	833lm	90	ON/OFF	BZRL4010G15DNE	black	●
2700K	14,5W	LED strip	220/240V	833lm	90	ON/OFF	BZRL4010G15DOR	gold	●
3000K	14,5W	LED strip	220/240V	882lm	90	ON/OFF	BZRL4010G15WBO	white	○
3000K	14,5W	LED strip	220/240V	882lm	90	ON/OFF	BZRL4010G15WNE	black	●
3000K	14,5W	LED strip	220/240V	882lm	90	ON/OFF	BZRL4010G15WOR	gold	●
4000K	14,5W	LED strip	220/240V	980lm	90	ON/OFF	BZRL4010G15NBO	white	○
4000K	14,5W	LED strip	220/240V	980lm	90	ON/OFF	BZRL4010G15NNE	black	●
4000K	14,5W	LED strip	220/240V	980lm	90	ON/OFF	BZRL4010G15NOR	gold	●
note	integrated driver RAL 9005 black RAL 9016 white								
included	1 x driver Ultraslim 60W (220/240V)								
customizations	length lumen output								



CE UK CA IP40

ZIRKOL LINEAR WALL 2m | ON/OFF

DIRECT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
2700K	29W	LED strip	220/240V	1666lm	90	ON/OFF	BZRL4020G15DBO	white	○
2700K	29W	LED strip	220/240V	1666lm	90	ON/OFF	BZRL4020G15DNE	black	●
2700K	29W	LED strip	220/240V	1666lm	90	ON/OFF	BZRL4020G15DOR	gold	●
3000K	29W	LED strip	220/240V	1764lm	90	ON/OFF	BZRL4020G15WBO	white	○
3000K	29W	LED strip	220/240V	1764lm	90	ON/OFF	BZRL4020G15WNE	black	●
3000K	29W	LED strip	220/240V	1764lm	90	ON/OFF	BZRL4020G15WOR	gold	●
4000K	29W	LED strip	220/240V	1960lm	90	ON/OFF	BZRL4020G15NBO	white	○
4000K	29W	LED strip	220/240V	1960lm	90	ON/OFF	BZRL4020G15NNE	black	●
4000K	29W	LED strip	220/240V	1960lm	90	ON/OFF	BZRL4020G15NOR	gold	●
note	integrated driver RAL 9005 black RAL 9016 white								
included	1 x driver Ultraslim 60W (220/240V)								
customizations	length lumen output								

CE UK CA IP40



aluminium
structure profile

- downlight
- power input
 - metal cable

ZIRKOL LINEAR UGR 1,40m | DALI

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
3000K	45W	LED strip	24V	3600lm	90	DALI/PUSH	BZRL1614I42WBO	white	○
3000K	45W	LED strip	24V	3600lm	90	DALI/PUSH	BZRL1614I42WNE	black	●
4000K	45W	LED strip	24V	3700lm	90	DALI/PUSH	BZRL1614I42NBO	white	○
4000K	45W	LED strip	24V	3700lm	90	DALI/PUSH	BZRL1614I42NNE	black	●
note	remote driver RAL 9005 black RAL 9016 white								
included	1 x driver 60W DALI2 (220/240V) 1 driver box (40x5x4,5) 1 electrical cable length 3m 2 x adjustable metal cable length 3m (including ceiling attachments)								
customizations	length white reflectors								

CE UK CA IP40 UGR<19

UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
3000K	60W	LED strip	24V	3600+1100lm	90	DALI/PUSH	BZRL1714I49WBO	white	○
3000K	60W	LED strip	24V	3600+1100lm	90	DALI/PUSH	BZRL1714I49WNE	black	●
4000K	60W	LED strip	24V	3700+1200lm	90	DALI/PUSH	BZRL1714I49NBO	white	○
4000K	60W	LED strip	24V	3700+1200lm	90	DALI/PUSH	BZRL1714I49NNE	black	●
note	remote driver RAL 9005 black RAL 9016 white								
included	1 x driver 60W DALI2 (220/240V) 1 driver box (40x5x4,5) 1 electrical cable length 3m 2 x adjustable metal cable length 3m (including ceiling attachments)								
customizations	length white reflectors								

CE UK CA IP40 UGR<19



white





black



ZIRKOL LINEAR CEILING UGR 1,46m | ON/OFF

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
3000K	40W	LED strip	220/240V	3600lm	90	ON/OFF	BZRLU414I42WBO	white	○
3000K	40W	LED strip	220/240V	3600lm	90	ON/OFF	BZRLU414I42WNE	black	●
4000K	40W	LED strip	220/240V	3700lm	90	ON/OFF	BZRLU414I42NBO	white	○
4000K	40W	LED strip	220/240V	3700lm	90	ON/OFF	BZRLU414I42NNE	black	●
note	integrated driver RAL 9005 black RAL 9016 white								
included	1 x driver Ultraslim 60W (220/240V)								
customizations	length white reflectors								

CE UK CA IP40 UGR<19

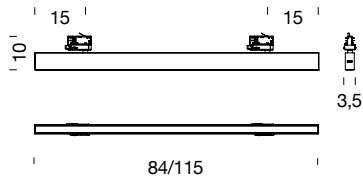

aluminium
structure profile

ZIRKOL TRACK UGR 0,84m | ON/OFF

DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
3000K	26W	LED strip	220/240V	2160lm	90	ON/OFF	BZRL54084I42WBO	white	○
3000K	26W	LED strip	220/240V	2160lm	90	ON/OFF	BZRL54084I42WNE	black	●
4000K	26W	LED strip	220/240V	2220lm	90	ON/OFF	BZRL54084I42NBO	white	○
4000K	26W	LED strip	220/240V	2220lm	90	ON/OFF	BZRL54084I42NNE	black	●
note	integrated driver RAL 9005 black RAL 9016 white compatible with TRACK 3C/0-10V"								
included	1 x driver Ultraslim 60W (220/240V)								
customizations	length white reflectors								

CE UK CA IP40 UGR<19

ZIRKOL TRACK UGR 1,15m | ON/OFF



DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
3000K	35W	LED strip	220/240V	2957lm	90	ON/OFF	BZRL54115I42WBO	white	○
3000K	35W	LED strip	220/240V	2957lm	90	ON/OFF	BZRL54115I42WNE	black	●
4000K	35W	LED strip	220/240V	3039lm	90	ON/OFF	BZRL54115I42NBO	white	○
4000K	35W	LED strip	220/240V	3039lm	90	ON/OFF	BZRL54115I42NNE	black	●
note	integrated driver RAL 9005 black RAL 9016 white compatible with TRACK 3C/0-10V"								
included	1 x driver Ultraslim 60W (220/240V)								
customizations	length white reflectors								

CE UK CA IP40 UGR<19



Zirkol Track UGR

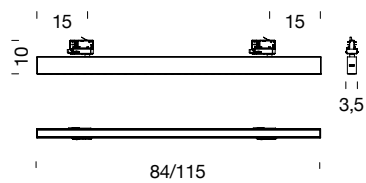

ZIRKOL TRACK OPAL 0,84m | ON/OFF

DOWNLIGHT									
CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
3000K	26W	LED strip	220/240V	1680lm	90	ON/OFF	BZRL54084G15WBO	white	○
3000K	26W	LED strip	220/240V	1680lm	90	ON/OFF	BZRL54084G15WNE	black	●
4000K	26W	LED strip	220/240V	1764lm	90	ON/OFF	BZRL54084G15NBO	white	○
4000K	26W	LED strip	220/240V	1764lm	90	ON/OFF	BZRL54084G15NNE	black	●
note	integrated driver RAL 9005 black RAL 9016 white compatible with TRACK 3C/0-10V"								
included	1 x driver Ultraslim 60W (220/240V)								
customizations	length								

CE UK CA IP40

ZIRKOL TRACK OPAL 1,15m | ON/OFF

DOWNLIGHT									
CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish	
3000K	35W	LED strip	220/240V	2300lm	90	ON/OFF	BZRL54115G15WBO	white	○
3000K	35W	LED strip	220/240V	2300lm	90	ON/OFF	BZRL54115G15WNE	black	●
4000K	35W	LED strip	220/240V	2415lm	90	ON/OFF	BZRL54115G15NBO	white	○
4000K	35W	LED strip	220/240V	2415lm	90	ON/OFF	BZRL54115G15NNE	black	●
note	integrated driver RAL 9005 black RAL 9016 white compatible with TRACK 3C/0-10V"								
included	1 x driver Ultraslim 60W (220/240V)								
customizations	length								

CE UK CA IP40



Zirkol Track Opal



Zirkol Linear Ceiling UGR, black.
Private project, Florence



GAMMA Bernhard Osann



Floor



Gamma

The Zirkol collection includes a floor-standing variant. Using the same technology, Gamma offers a linear floor lighting solution particularly suited for office applications, featuring UGR downlight and diffused uplight emission.

La collezione Zirkol include anche una versione da terra. Utilizzando la stessa tecnologia, Gamma offre una soluzione lineare da terra particolarmente adatta alle applicazioni in uffici. Emissione downlight UGR e uplight diffusa.





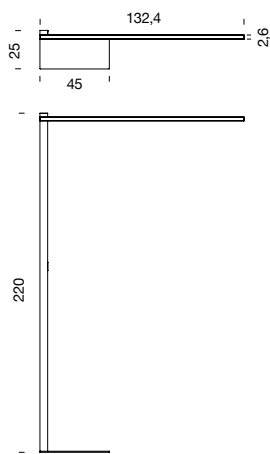


UGR + Uplight

GAMMA
UP-DOWNLIGHT

CCT	max power	source	voltage	lum. flux	CRI	switching	code	finish
3000K	55W	LED strip	220/240V	3800lm	90	dimmer on board	MGAM35A1149WNE	black
4000K	55W	LED strip	220/240V	4000lm	90	dimmer on board	MGAM35A1149NNE	black
3000K	55W	LED strip	220/240V	3800lm	90	dimmer on board + CASAMBI	MGAM3CA1149WNE	black
4000K	55W	LED strip	220/240V	4000lm	90	dimmer on board + CASAMBI	MGAM3CA1149NNE	black
note		separate control dimmable push botton RAL 9005 black						
included		integrated driver						

CE UK CA IP40 UGR<19

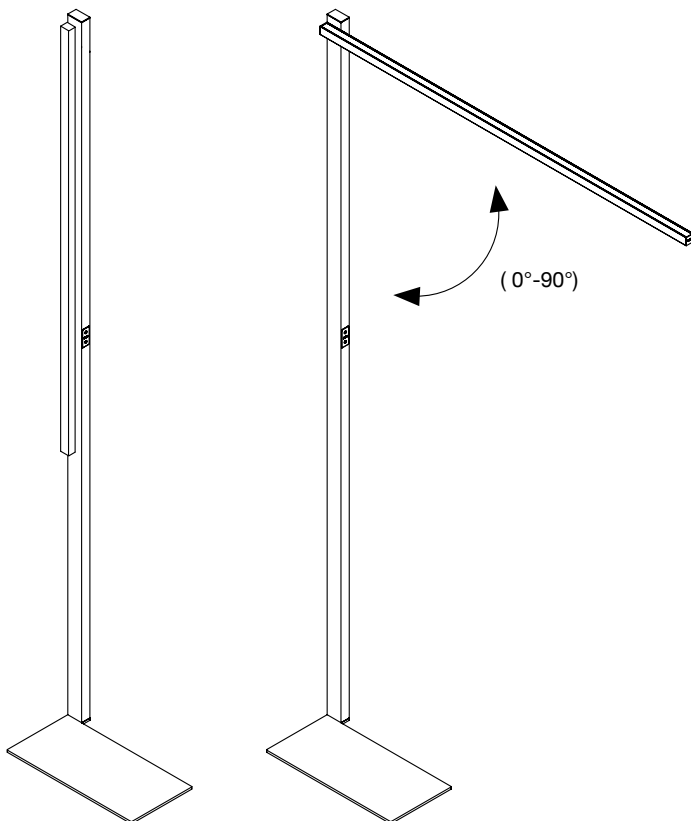


90° opening arm

Drivers / Accessories

ZIRKOL DRIVERS


DRIVERS



input voltage	output voltage	max power	switching	IP	dimensions cm	code
220/240V	24VDC	20W	ON/OFF	20	10,3x3,5x1,6	WPSU20W24V
220/240V	24VDC	60W	ON/OFF	20	18x5,2x3	WPSU60W24V
110/240V	24VDC	75W	ON/OFF	67	14x6,3x3,2	WPSU75W24VIP
110/240V	24VDC	100W	ON/OFF	67	14x6,3x3,2	WPSU100W24VIP
110/240V	24VDC	150W	ON/OFF	20	17,9x6,2x3	WPSU150W24V
200/240V	24VDC	250W	ON/OFF	20	19,5x6,7x3,2	WPSU250W24V
220/240V	24VDC	75W	TRIAC	20	21,2x5,4x3,3	WPST75W24W
220/240V	24VDC	60W	DALI2	20	36,1x3x2,1	WPSD60W24V
220/240V	24VDC	150W	DALI2/PUSH	20	35x3x2	WPSD150W24V
note		more information on p. 326 of the catalog				


DIMMER INTERFACE

WIRED




dimensions x,y,z				switching	code
4,4x5,7x2,5	240W	24V		0-10V 1-10V PUSH DALI*	WDIMDALIHP
note		*to combine with driver ON/OFF			

WIRELESS



dimensions x,y,z				switching	code
4,4x5,7x2,5				CASAMBI PUSH*	WBLTSMART
note		*to combine with driver ON/OFF, on board (HOME version) or external mounting, iOS and Android compatible, set up by customer or by ILTI LUCE on commission			

REMOTE CONTROL KIT



dimensions x,y,z	max power	voltage	switching	code
1,2x0,5x5	120W	5V - 24V	REMOTE	WDIMKITREM
note		mono channel dimmer for LED with RF (radio frequency) wireless remote control , to be used as dimming solution in place of specific wiring		



ZIRKOL OPTIONAL ACCESSORIES

CEILING ATTACHMENT





version	finish	code
1 piece	chrome	BROSMINIST

CEILING PLATE FOR REMOTE DRIVERS



version	finish	code
surface application	white	BROSROUNDBI
	black	BROSROUNDBNE
	gold	BROSROUNDBOR
recessed application	white	BROSINCBBI
	black	BROSINCBNE
	gold	BROSINCBOR
note	to be used for decentralized solutions or remote mounting driver	

DRIVER BOXES



version	finish	code
1 driver-1 electrical cable	white	BROSPS1BI
	black	BROSPS1BNE
	gold	BROSPS1BOR
1 driver-2 electrical cables	white	BROSPS2BI
	black	BROSPS2BNE
	gold	BROSPS2BOR

CREDITS

- Zirkol Circle at Hages Badehotel, Rødby – p.2-3
- Zirkol Circle, Zirkol Square and Zirkol Linear at “VITA DULCIS. Paura e desiderio nell'impero romano”, Palazzo delle Esposizioni, Rome, 22 aprile – 27 agosto 2023. ©2023 Azienda Speciale Palaexpo. Ph. Daniele Molajoli – p.4-9-48-49
- Zirkol Outdoor at Casa Y, Turin – Project: Arch. Luca Maria Gandini. Ph. Barbara Corsico – p. 24
- Zirkol Circle at Private Project, Manchester - Project: Vivo Casa. Ph. Peter Corcoran – p.31-54-55
- Zirkol custom at Nexer Office. Ph. James Silverman – p.34
- Zirkol custom at Domal showroom, Milan - Project: Lascia la Scia, Works management: Federica Allevi – p.37
- Zirkol Square Q custom custom at La Cave, Galerie Lafayette Haussmann, Paris - Project management: Groupe Duclot Studio: Trace & Associés Architectes. Light designer: Vincent Péron – Vip Lighting Ph. Benjamin Deroche – p.38-39
- Zirkol Circle Round at Luxury Boutique Officina Bernardi, Milan - p.120-121
- Zirkol Circle and Zirkol Spot at Luxemburg National Library, Turin. Ph. PEPE fotografia – p.85
- Zirkol Square S at Stanford University, Florence - Project: Cloro Studio - Pier Paolo Carta and Valeria Zammarchi. Ph. Fabio Bascetta – p.89
- Zirkol Square Q custom at Society Café, Dubai Project: XO Atelier. Ph. Alex Jeffries – p.96-97

GENERAL INFORMATION

IT

Obiettivo di ILTI LUCE è quello di proporre soluzioni tecnologiche all'avanguardia, anche tramite un continuo e costante processo di aggiornamento. Per definizione la tecnologia è mutevole ed in costante evoluzione. Sugeriamo, per assicurare la consultazione delle informazioni più recenti sui prodotti, di verificare quelle disponibili sul nostro website www.iltiluce.com. Questo documento è stato redatto a Marzo 2025. Sostituisce ed aggiorna qualsiasi altra pubblicazione in relazione ai prodotti elencati.

A causa di naturali limiti tecnici di riproduzione e stampa, il colore dei modelli a catalogo è puramente indicativo e non può costituire motivo di rivalsa.

Ove non espressamente scritto, le lampadine non sono incluse nella vendita.

EN

ILTI LUCE's goal is to propose cutting-edge technological solutions, also through a constant updating process.

By definition, technology is changing and continuously evolving. To ensure the consultation of the latest product data, we recommend referring to the information available on our website www.iltiluce.com. This document was drafted in March 2025. It replaces and updates any other publication in relation to the listed products. Due to natural technical limitations of reproduction and printing, the colour of the models in the catalogue is purely indicative and cannot constitute grounds for recourse.

Unless expressly stated, light bulbs are not included in the sale.

DE

Das Ziel von ILTI LUCE ist die Entwicklung von technologischen Lösungen auf dem neuesten Stand, auch durch einen ständigen Aktualisierungsprozess. Die Technik entwickelt sich ständig weiter. Um die aktuellsten Produktunterlagen einzusehen, empfehlen wir, sich auf die Informationen auf unserer Website www.iltiluce.com zu beziehen. Dieses Dokument wurde im März 2025 verfasst. Es ersetzt und aktualisiert alle anderen Veröffentlichungen in Bezug auf die aufgeführten Produkte.

Aufgrund der technischen Grenzen der Reproduktion und des Drucks sind die Farben der im Katalog abgebildeten Modelle rein indikativ und können nicht als Reklamationsgrund dienen. Sofern nicht ausdrücklich angegeben, sind die Glühbirnen nicht im Verkauf enthalten.

FR

L'objectif de ILTI LUCE est de proposer des solutions technologiques

de pointe, également à travers un processus de mise à jour constante. Par définition, la technologie évolue et change continuellement. Pour garantir la consultation des dernières données produits, nous vous recommandons de vous référer aux informations disponibles sur notre site www.iltiluce.com.

Ce document a été établi en Mars 2025. Il remplace et met à jour toute autre publication relative aux produits cités.

En raison des limites techniques naturelles de reproduction et d'impression, la couleur des modèles du catalogue est purement indicative et ne peut constituer un motif de réclamation. Sauf mention expresse, les ampoules ne sont pas comprises dans la vente.

IT

L'elenco aggiornato dei prodotti con marchio UL ed ETL e le relative informazioni tecniche sono disponibili sul sito website:

nemolighting.com/usa/

EN

The updated list of UL and ETL marked products and relevant technical information are available on the website:


nemolighting.com/usa/

DE

Die aktualisierte Liste der UL- und ETL-zertifizierten Produkte und die entsprechenden technischen Informationen finden Sie auf der Website: nemolighting.com/usa/

FR

La liste actualisée des produits marqués UL et ETL et les informations techniques correspondantes sont disponibles sur le site web : nemolighting.com/usa/



Photometric data and more information available on our website:

www.iltiluce.com



Scan the code for Terms & Conditions

ILTI LUCE

ILTI LUCE

Strada Borgata Paradiso, 20
10036 Settimo Torinese - ITALY
Tel. +39 011 765 73 01
info@iltiluce.com

www.iltiluce.com

Part of

NEMO Group

NEMO SHOWROOM MONFORTE

Corso Monforte 19/A,
20122 Milan
Tel +39 02 970 703 40
monforte@nemolighting.com

NEMO GALERIE PARIS

44, Rue du Bac
75007 Paris
Tel +33 (0) 1 486 318 42
ruedubac@nemolighting.fr

NEMO DUBAI

Dubai Design District, Building 3
Dubai
United Arab Emirates
Tel +971 569969117
gagan.chhibber@reggiani.net

NEMO USA

625 Jersey Avenue, Unit 7
New Brunswick, NJ 08901
Tel +1 800 734 5858
usa@nemolighting.com
nemolighting.com/usa/

NEMO COPENHAGEN

Store Kongensgade 118
1264 København
Denmark

