

ELBA

Familie von Innenstrahlern für Akzentbeleuchtung.

Die Leuchte kann um 90° vertikal und um 355° horizontal gedreht werden, um die Beleuchtung in jede beliebige Ausrichtung zu lenken.

Die Wärmeableitungsstruktur und der eingebaute Driver sind miteinander kombiniert. Kompakte und minimalistische Ästhetik mit frei einstellbarem Abstrahlwinkel erfüllen alle Beleuchtungsanforderungen.



DIMMABLE TRIAC | 2700K

LAMPING

Source	1x LED COB
Total power	13W
Emission	direct adjustable 15°-55°
Switching	dimnable TRIAC
Tension	220/240V
Color temperature	2700K
Luminous flux	830lm
Initial luminaire efficacy	64lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø5,6x15cm
Materials	aluminum
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with TRACK 3C/0-10V
Net lamp weight	0,5 kg

Codes

ELB LW2 81
ELB LN2 81

Structure


white
black

PACKAGE

Package 01

Dimension: 21x19x6 cm / Gross weight: 0,7 kg

Certificazioni

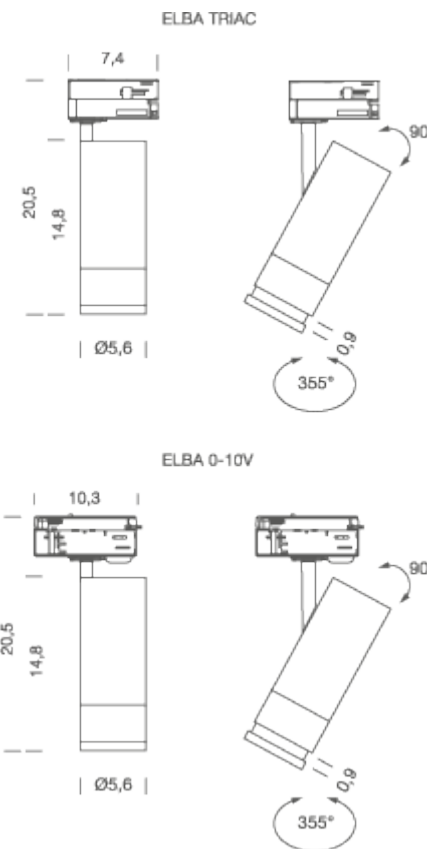

DIMMABLE TRIAC | 3000K

LAMPING

Source	1x LED COB
Total power	13W
Emission	direct adjustable 15°-55°
Switching	dimnable TRIAC
Tension	220/240V
Color temperature	3000K
Luminous flux	900lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø5,6x15cm
Materials	aluminum
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with TRACK 3C/0-10V
Net lamp weight	0,5 kg

Codes

ELB LW3 81
ELB LN3 81

Structure


white
black

PACKAGE

Package 01

Dimension: 21x19x6 cm / Gross weight: 0,7 kg

Certificazioni

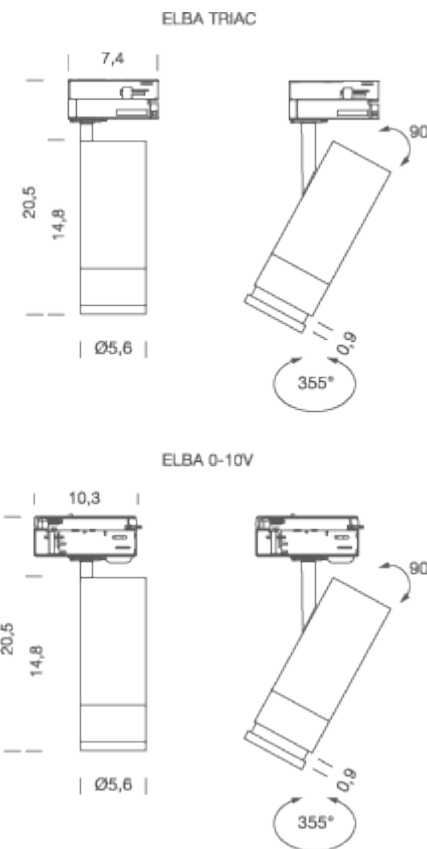

DIMMABLE 0-10V | 2700K

LAMPING

Source	1x LED COB
Total power	13W
Emission	direct adjustable 15°-55°
Switching	dimnable 0-10V
Tension	220/240V
Color temperature	2700K
Luminous flux	830lm
Initial luminaire efficacy	64lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø5,6x15cm
Materials	aluminum
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with TRACK 3C/0-10V
Net lamp weight	0,5 kg

Codes

ELB LW2 82
ELB LN2 82

Structure


white
black

PACKAGE

Package 01

Dimension: 21x19x6 cm / Gross weight: 0,7 kg

Certificazioni

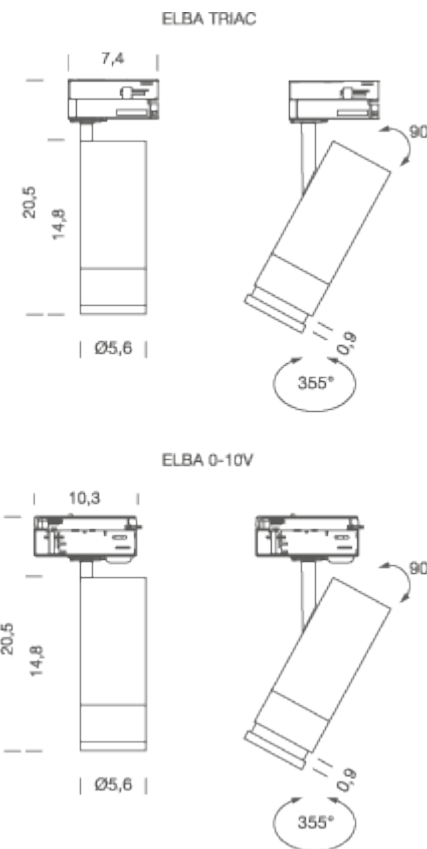

DIMMABLE 0-10V | 3000K

LAMPING

Source	1x LED COB
Total power	13W
Emission	direct adjustable 15°-55°
Switching	dimnable 0-10V
Tension	220/240V
Color temperature	3000K
Luminous flux	900lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø5,6x15cm
Materials	aluminum
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with TRACK 3C/0-10V
Net lamp weight	0,5 kg

Codes

ELB LW3 82
ELB LN3 82

Structure

white
black

PACKAGE

Package 01

Dimension: 21x19x6 cm / Gross weight: 0,7 kg

Certificazioni

