

GAMMA

Bernhard Osann

Gamma passt in allen Räumen, in denen ein blendfreie direkte Beleuchtung $UGR < 19$, sowie eine diffuse indirekte Beleuchtung benötigt wird. Mit ihrem klaren und greadlinigen Design und einer Lichtquelle, die sich über die gesamte Länge des Lampenarms erstreckt, ist sie mit einem dimmbaren Druckknopf für die getrennte Steuerung von direktem und indirektem Licht ausgestattet. Erhältlich in Schwarz und mit zwei LED-Farbtemperaturen.



3000K | DIMMER ON BOARD

LAMPING

Source	LED strip
Total power	55W
Emission	downlight UGR<19 / opal uplight
Switching	dimmer on board
Tension	220/240V
Color temperature	3000K
Luminous flux	3800lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	25x132,4x220cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	UGR<19 separate control dimmable push button RAL 9005 black driver included
Net lamp weight	10,6 kg


Codes
MGAM35A1/49WNE

PACKAGE
Package 01
Dimension: 230x35x18 cm / Gross weight: 14,6 kg

Certificazioni



Structure
black

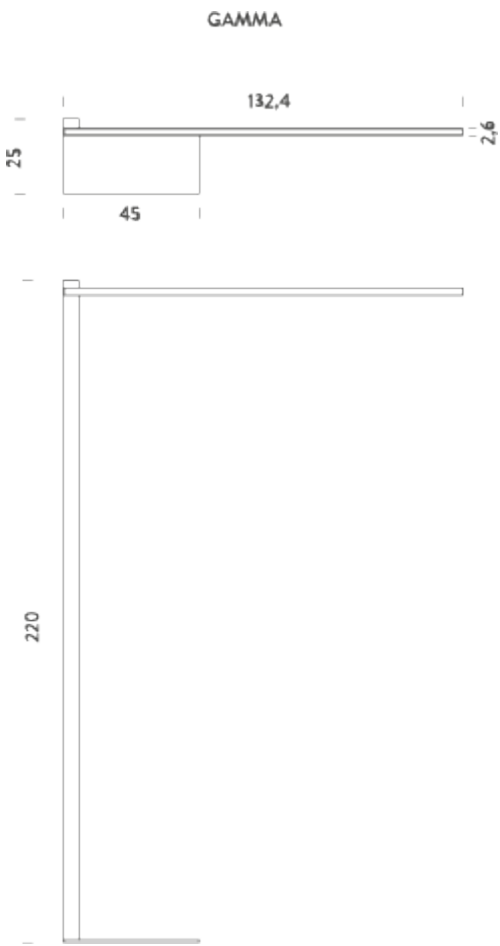

3000K | DIMMER ON BOARD + CASAMBI

LAMPING

Source	LED strip
Total power	55W
Emission	downlight UGR<19 / opal uplight
Switching	dimmer on board + Casambi
Tension	220/240V
Color temperature	3000K
Luminous flux	3800lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	25x132,4x220cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	UGR<19 separate control dimmable push button RAL 9005 black driver included
Net lamp weight	10,6 kg

Codes

MGAM3CA1/49WNE


Structure

black

PACKAGE

Package 01 Dimension: 230x35x18 cm / Gross weight: 14,6 kg

Certificazioni

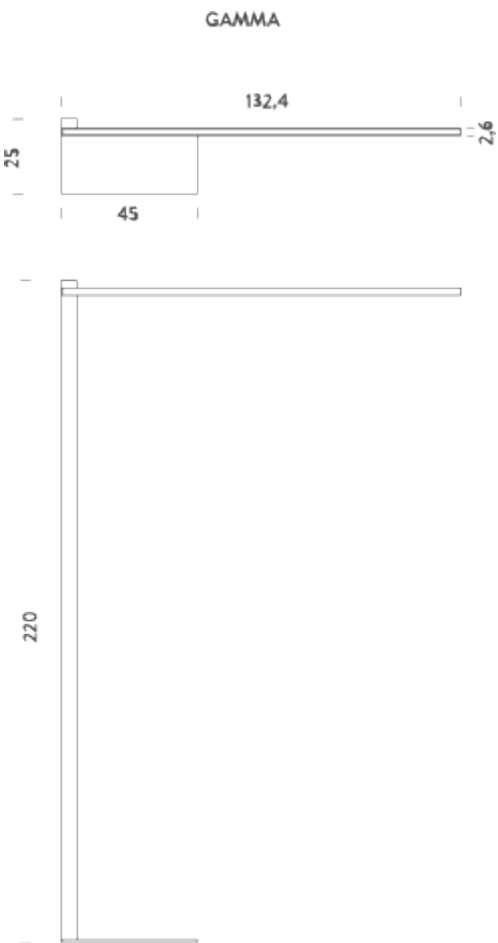

4000K | DIMMER ON BOARD

LAMPING

Source	LED strip
Total power	55W
Emission	downlight UGR<19 / opal uplight
Switching	dimmer on board
Tension	220/240V
Color temperature	4000K
Luminous flux	4000lm
Initial luminaire efficacy	73lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	25x132,4x220cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	UGR<19 separate control dimmable push button RAL 9005 black driver included
Net lamp weight	10,6 kg

Codes

MGAM35A1I49NNE


Structure

black

PACKAGE

Package 01 Dimension: 230x35x18 cm / Gross weight: 14,6 kg

Certificazioni

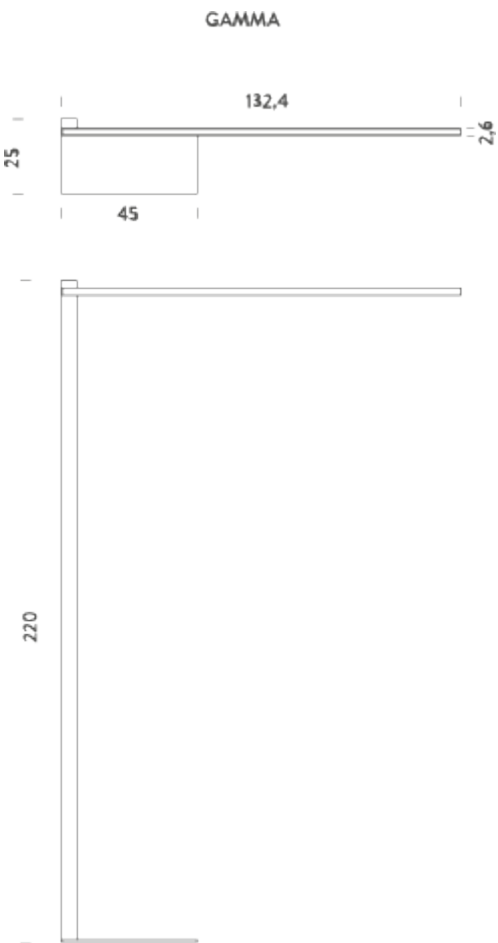

4000K | DIMMER ON BOARD + CASAMBI

LAMPING

Source	LED strip
Total power	55W
Emission	downlight UGR<19 / opal uplight
Switching	dimmer on board + Casambi
Tension	220/240V
Color temperature	4000K
Luminous flux	4000lm
Initial luminaire efficacy	73lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	25x132,4x220cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	UGR<19 separate control dimmable push button RAL 9005 black driver included
Net lamp weight	10,6 kg

Codes

MGAM3CA1/49NNE

Structure

black

PACKAGE

Package 01 Dimension: 230x35x18 cm / Gross weight: 14,6 kg

Certificazioni

