


LUX WALKWAY

LED Einbau-Spot für dekorative und Signal-Beleuchtungen
im Außenbereich.

1 leistungsstarkes LED mit asymmetrischem Linse,
Schutzglas und Kabelverschraubung.

Befestigung mit Einbaubox LUXCASSA1 aus Kunststoff
(nicht im Lieferumfang enthalten) oder mit den
Stahlbefestigungsfedern (im Lieferumfang enthalten).



3000K

LAMPING

Source	LED
Total power	1,2W
Emission	Asymmetric
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	10lm
Initial luminaire efficacy	<10lm/W
Initial chromaticity	SDCM < 3
Typ CRI	70
IP class	65
Dimensions	Ø4,4x5,0cm
Materials	Sanded chromed brass
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver not included, cable length 1m, series connection
Customization options	CCT 2700K
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,22 kg

Codes

BLUX0201217WCS


Structure

grey

PACKAGE

Package 01 Dimension: 15x11x5 cm / Gross weight: 0,22 kg

Certificazioni

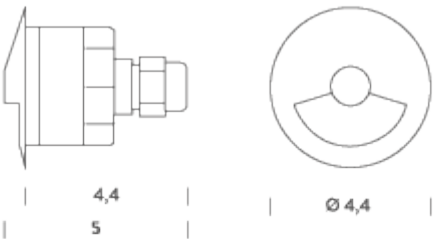

5000K

LAMPING

Source	LED
Total power	1,2W
Emission	Asymmetric
Switching	according to driver
Tension	350mA
Color temperature	5000K
Luminous flux	12lm
Initial luminaire efficacy	> 37lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	65
Dimensions	Ø4,4x5,0cm
Materials	Sanded chromed brass
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver not included, cable length 1m, series connection
Customization options	CCT 2700K
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,22 kg

Codes

BLUX02012170CS

Structure

grey

PACKAGE

Package 01 Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni

