

MINIFLUX GARDEN

Die neue Miniflux Garden-Version von Miniflux ist für den Außeneinsatz konzipiert und wird am Boden befestigt. Sie ist drehbar und kann dank eines speziellen Zubehörrings zum Boden hin geneigt werden. Miniflux Garden ist eine helle und dekorative Lösung.



0,82M | 2700K

MINIFLUX GARDEN

LAMPING

Source	LED strip
Total power	8W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	2700K
Luminous flux	461lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	ø2x82cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver and other accessory not included cable length 3m
Customization options	tube length
Accessories	Base ground,
Net lamp weight	0,7 kg

Codes

BMGT30082G26DAN

Structure

black

PACKAGE

Package 01

Dimension: 100x8,5x4 cm / Gross weight: 0,7 kg

Certificazioni



0,82M | 3000K

MINIFLUX GARDEN

LAMPING

Source	LED strip
Total power	8W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	3000K
Luminous flux	512lm
Initial luminaire efficacy	64lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	ø2x82cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver and other accessory not included cable length 3m
Customization options	tube length
Accessories	Base ground,
Net lamp weight	0,7 kg

Codes

BMGT30082G26WAN

Structure


black

PACKAGE

Package 01

Dimension: 100x8,5x4 cm / Gross weight: 0,7 kg

Certificazioni

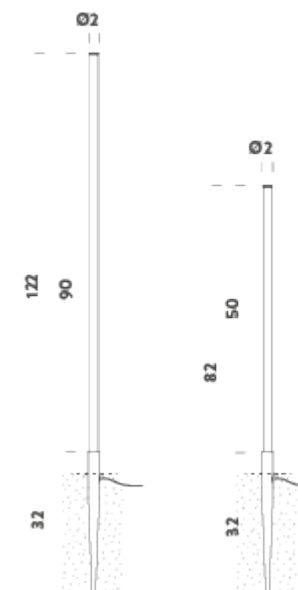

0,82M | 4000K

MINIFLUX GARDEN

LAMPING

Source	LED strip
Total power	8W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	4000K
Luminous flux	560lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	ø2x82cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver and other accessory not included cable length 3m
Customization options	tube length
Accessories	Base ground,
Net lamp weight	0,7 kg

Codes

BMGT30082G26NAN

Structure


black

PACKAGE

Package 01

Dimension: 100x8,5x4 cm / Gross weight: 0,7 kg

Certificazioni

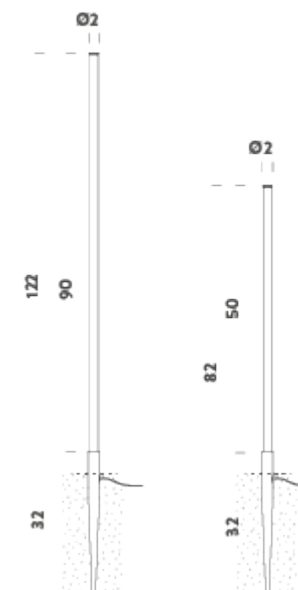

1,2M | 2700K

MINIFLUX GARDEN

LAMPING

Source	LED strip
Total power	14W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	2700K
Luminous flux	830lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	ø2x122cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver and other accessory not included cable length 3m
Customization options	tube length
Accessories	Base ground,

Codes

BMGT30122G26DAN

Structure


black

PACKAGE

Package 01

Dimension: 100x8,5x4 cm

Certificazioni

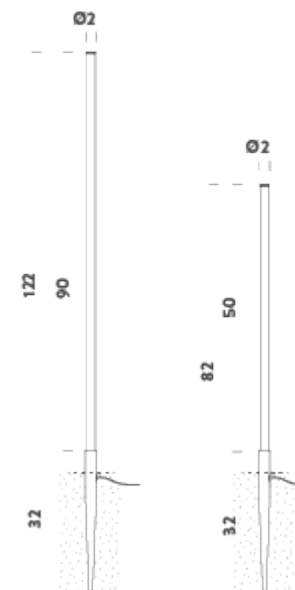

1,2M | 3000K

MINIFLUX GARDEN

LAMPING

Source	LED strip
Total power	14W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	3000K
Luminous flux	923lm
Initial luminaire efficacy	66lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	ø2x122cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver and other accessory not included cable length 3m
Customization options	tube length
Accessories	Base ground,

Codes

BMGT30122G26WAN

Structure


black

PACKAGE

Package 01

Dimension: 100x8,5x4 cm

Certificazioni

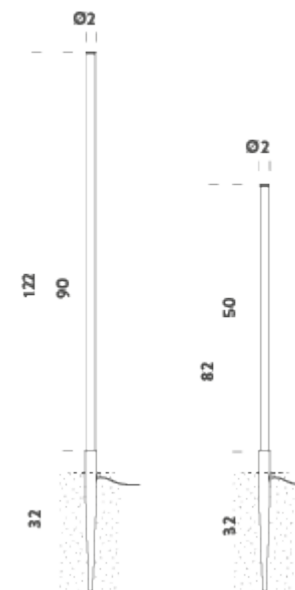

1,2M | 4000K

MINIFLUX GARDEN

LAMPING

Source	LED strip
Total power	14W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	4000K
Luminous flux	1025lm
Initial luminaire efficacy	73lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	ø2x122cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver and other accessory not included cable length 3m
Customization options	tube length
Accessories	Base ground,

Codes

BMGT30122G26NAN

Structure

black

PACKAGE

Package 01

Dimension: 100x8,5x4 cm

Certificazioni

