

# PATTERN

Pattern ist ein Einbaudownlight, mit fester Linsen-Optik besteht. Es wird in schwarzer Ausführung in den drei Wattstärken 6W, 10W und 20W angeboten. Treiber nicht enthalten.



## 6W | 2700K

### LAMPING

|                                 |                                      |
|---------------------------------|--------------------------------------|
| Source                          | 3x LED                               |
| Total power                     | 6W                                   |
| Emission                        | direct 36°                           |
| Switching                       | according to driver                  |
| Tension                         | 700mA                                |
| Color temperature               | 2700K                                |
| Luminous flux                   | 441lm                                |
| Initial luminaire efficacy      | 74lm/W                               |
| Initial chromaticity            | SDCM<3                               |
| Typ CRI                         | 90                                   |
| IP class                        | 20                                   |
| Dimensions                      | 9,8x5,6x7cm                          |
| Materials                       | aluminium                            |
| Ambient temperature range       | 0°C / +35°C                          |
| Performance ambient temperature | 25°C                                 |
| Notes                           | RAL 9005 black , driver not included |
| Energy class                    | F                                    |
| Net lamp weight                 | 0,29 kg                              |

### Codes

MPAT2103U67DNE

### Structure


black

### PACKAGE

Package 01

Dimension: 19x8x8,5 cm / Gross weight: 0,29 kg

### Certificazioni

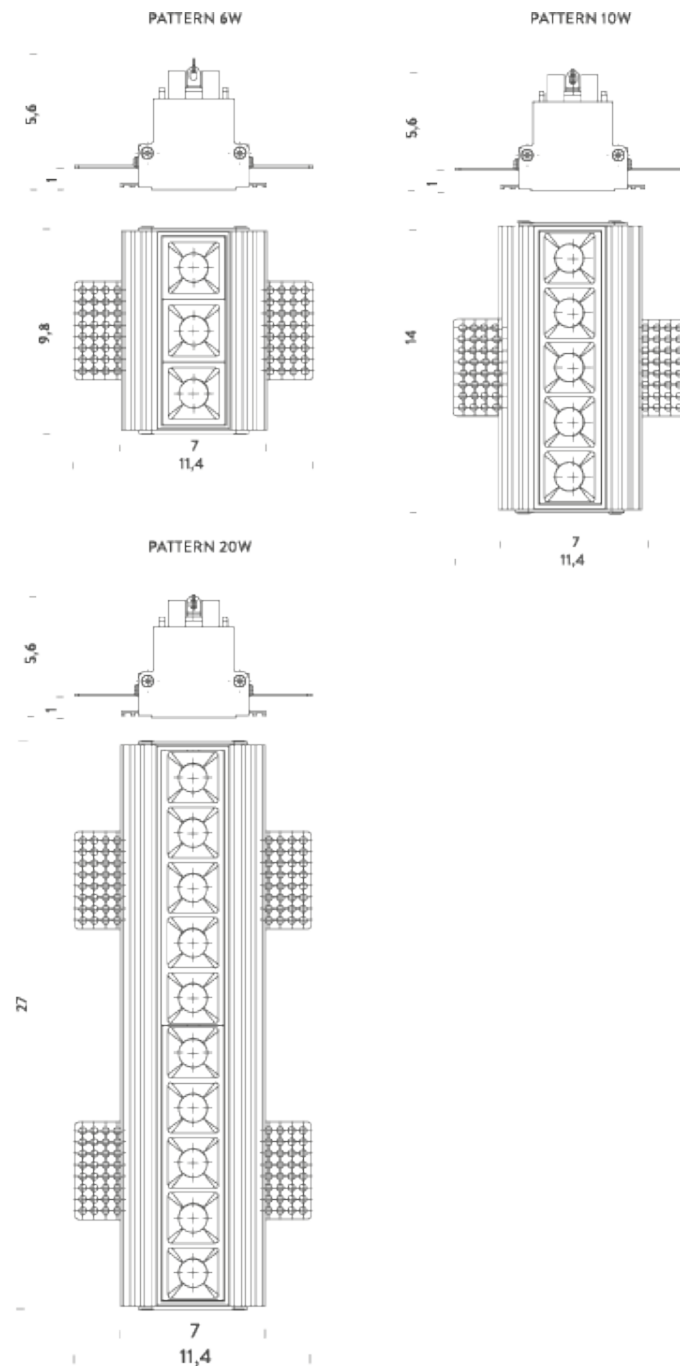

## 6W | 3000K

### LAMPING

|                                 |                                      |
|---------------------------------|--------------------------------------|
| Source                          | 3x LED                               |
| Total power                     | 6W                                   |
| Emission                        | direct 36°                           |
| Switching                       | according to driver                  |
| Tension                         | 700mA                                |
| Color temperature               | 3000K                                |
| Luminous flux                   | 490lm                                |
| Initial luminaire efficacy      | 82lm/W                               |
| Initial chromaticity            | SDCM<3                               |
| Typ CRI                         | 90                                   |
| IP class                        | 20                                   |
| Dimensions                      | 9,8 5,6x7cm                          |
| Materials                       | aluminium                            |
| Ambient temperature range       | 0°C / +35°C                          |
| Performance ambient temperature | 25°C                                 |
| Notes                           | RAL 9005 black , driver not included |
| Energy class                    | F                                    |
| Net lamp weight                 | 0,29 kg                              |

### Codes

MPAT2103U67WNE

### Structure


black

### PACKAGE

Package 01

Dimension: 19x8x8,5 cm / Gross weight: 0,29 kg

### Certificazioni

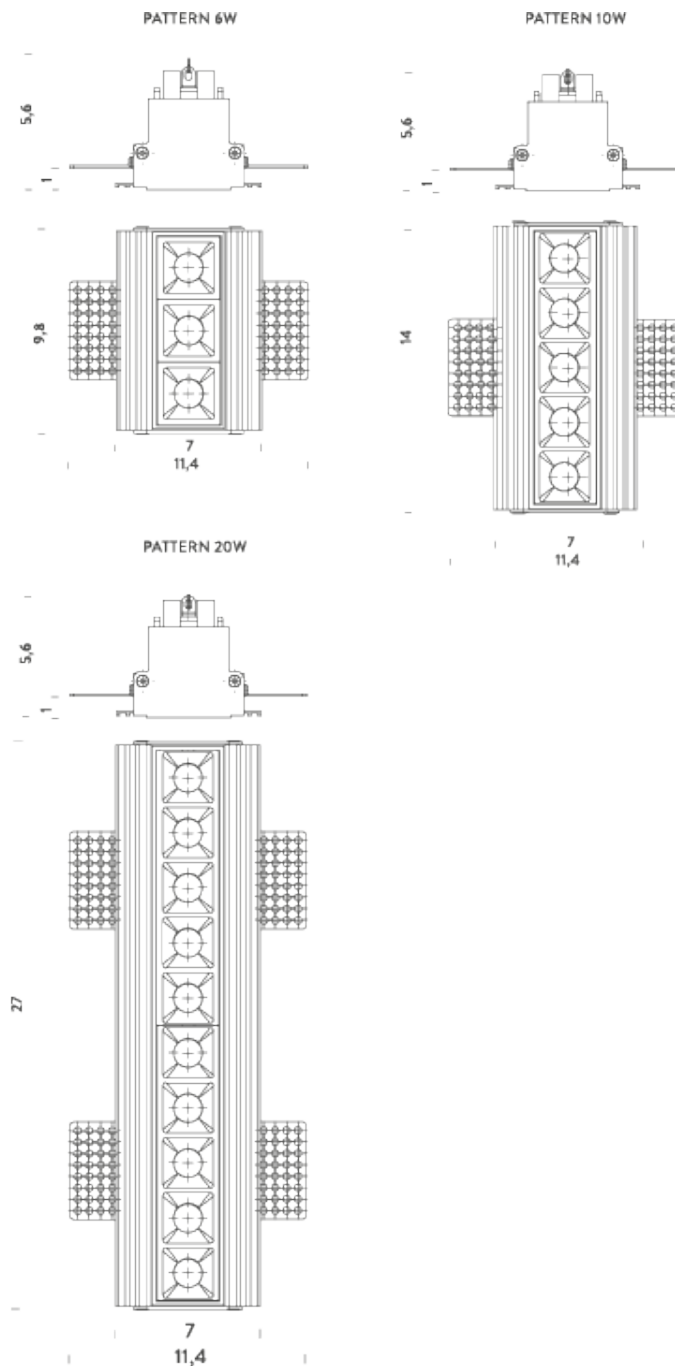

## 10W | 2700K

### LAMPING

|                                 |                                      |
|---------------------------------|--------------------------------------|
| Source                          | 5x LED                               |
| Total power                     | 10W                                  |
| Emission                        | direct 36°                           |
| Switching                       | according to driver                  |
| Tension                         | 700mA                                |
| Color temperature               | 2700K                                |
| Luminous flux                   | 660lm                                |
| Initial luminaire efficacy      | 66lm/W                               |
| Initial chromaticity            | SDCM<3                               |
| Typ CRI                         | 90                                   |
| IP class                        | 20                                   |
| Dimensions                      | 14,1x5,6x7cm                         |
| Materials                       | aluminium                            |
| Ambient temperature range       | 0°C / +35°C                          |
| Performance ambient temperature | 25°c                                 |
| Notes                           | RAL 9005 black , driver not included |
| Energy class                    | F                                    |
| Net lamp weight                 | 0,53 kg                              |

### Codes

MPAT2105U67DNE

### Structure


black

### PACKAGE

Package 01

Dimension: 19x8x8,5 cm / Gross weight: 0,53 kg

### Certificazioni

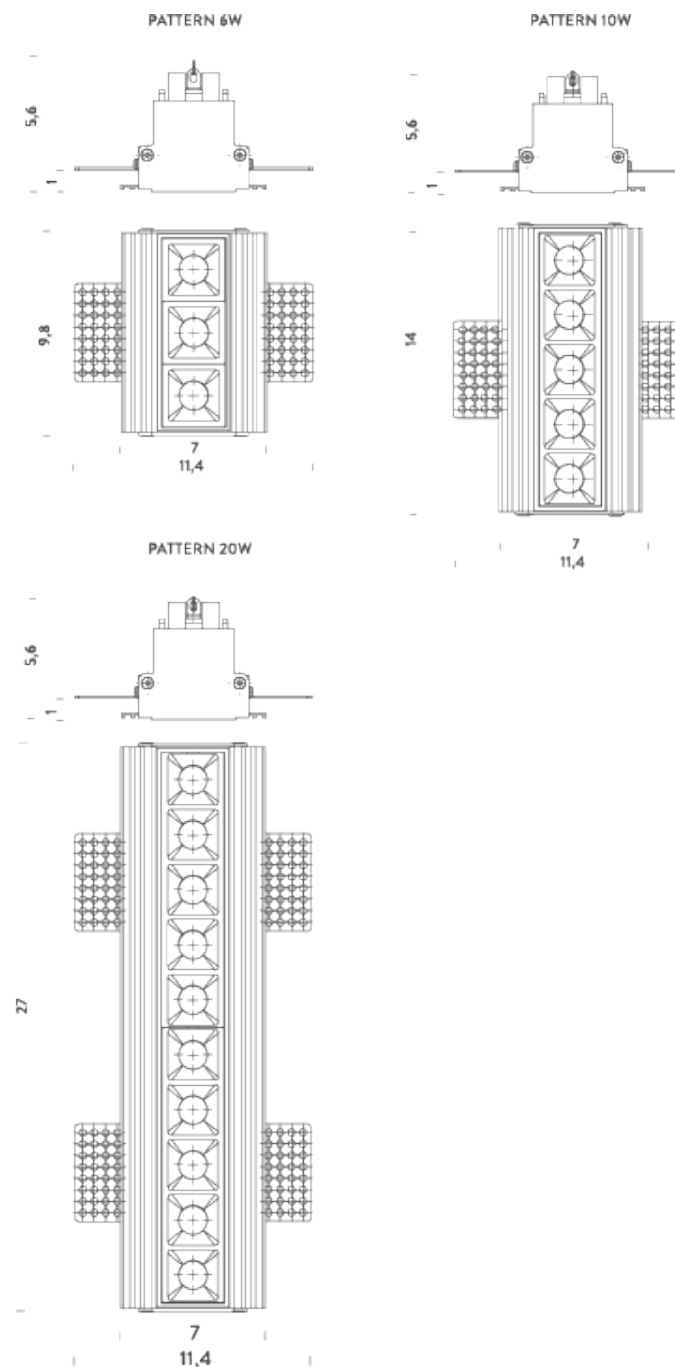

## 10W | 3000K

### LAMPING

|                                 |                                      |
|---------------------------------|--------------------------------------|
| Source                          | 5xLED                                |
| Total power                     | 10W                                  |
| Emission                        | direct 36°                           |
| Switching                       | according to driver                  |
| Tension                         | 700mA                                |
| Color temperature               | 3000K                                |
| Luminous flux                   | 736lm                                |
| Initial luminaire efficacy      | 74lm/W                               |
| Initial chromaticity            | SDCM<3                               |
| Typ CRI                         | 90                                   |
| IP class                        | 20                                   |
| Dimensions                      | 14,1x5,6x7cm                         |
| Materials                       | aluminium                            |
| Ambient temperature range       | 0°C / +35°C                          |
| Performance ambient temperature | 25°C                                 |
| Notes                           | RAL 9005 black , driver not included |
| Energy class                    | F                                    |
| Net lamp weight                 | 0,53 kg                              |

### Codes

MPAT2105U67WNE

### Structure


black

### PACKAGE

Package 01

Dimension: 19x8x8,5 cm / Gross weight: 0,53 kg

### Certificazioni

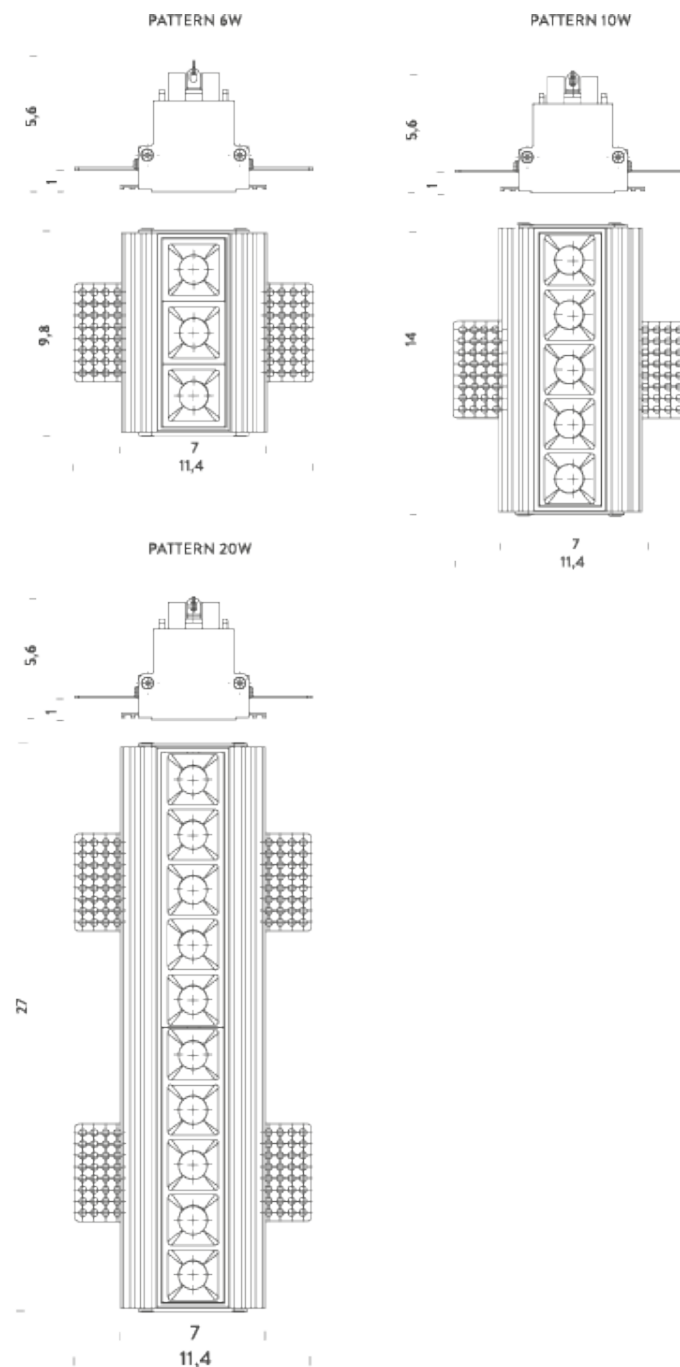

## 20W | 2700K

### LAMPING

|                                 |                                      |
|---------------------------------|--------------------------------------|
| Source                          | 10x LED                              |
| Total power                     | 20W                                  |
| Emission                        | direct 36°                           |
| Switching                       | according to driver                  |
| Tension                         | 600mA                                |
| Color temperature               | 2700K                                |
| Luminous flux                   | 1330lm                               |
| Initial luminaire efficacy      | 65lm/W                               |
| Initial chromaticity            | SDCM<3                               |
| Typ CRI                         | 90                                   |
| IP class                        | 20                                   |
| Dimensions                      | 27,3x5,6x7cm                         |
| Materials                       | aluminium                            |
| Ambient temperature range       | 0°C / +35°C                          |
| Performance ambient temperature | 25°C                                 |
| Notes                           | RAL 9005 black , driver not included |
| Energy class                    | F                                    |
| Net lamp weight                 | 0,90 kg                              |

### Codes

MPAT2110U67DNE

### Structure


black

### PACKAGE

Package 01

Dimension: 32,5x8x8,5 cm / Gross weight: 0,90 kg

### Certificazioni

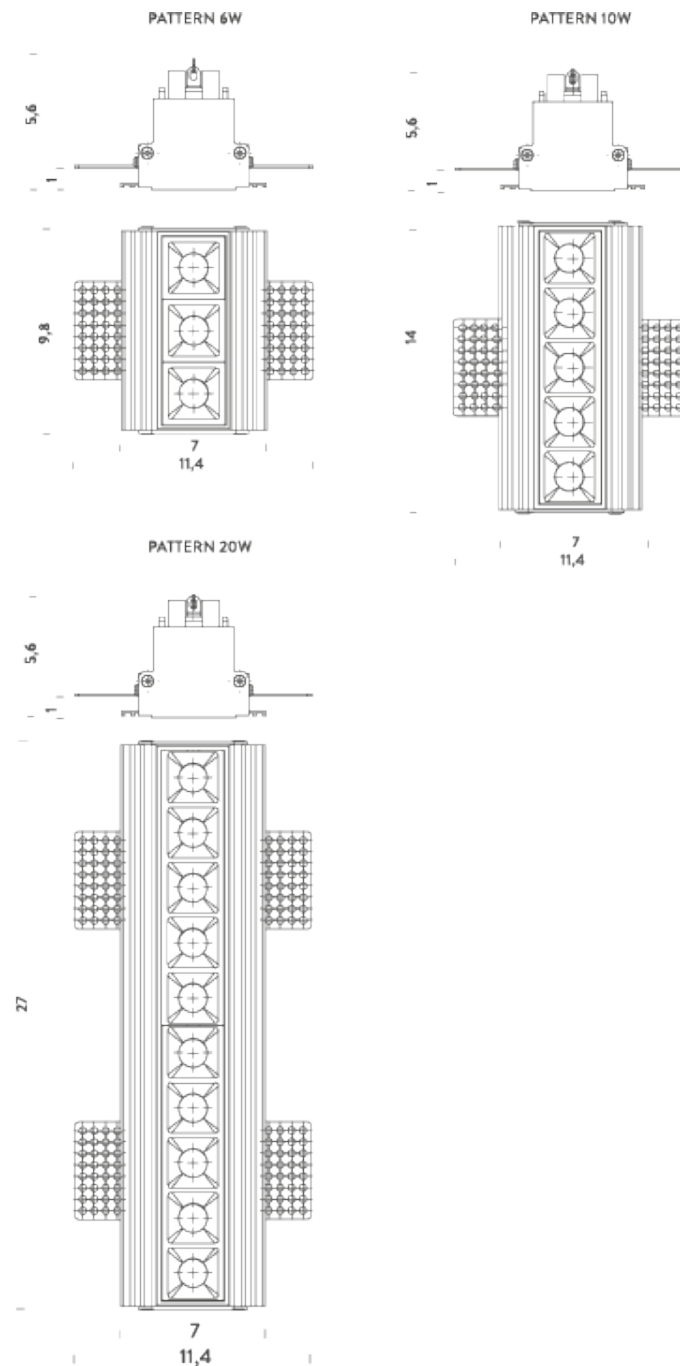

20W | 3000K

### LAMPING

|                                 |                                      |
|---------------------------------|--------------------------------------|
| Source                          | 10x LED                              |
| Total power                     | 20W                                  |
| Emission                        | direct 36°                           |
| Switching                       | according to driver                  |
| Tension                         | 600mA                                |
| Color temperature               | 3000K                                |
| Luminous flux                   | 1444lm                               |
| Initial luminaire efficacy      | 72lm/W                               |
| Initial chromaticity            | SDCM<3                               |
| Typ CRI                         | 90                                   |
| IP class                        | 20                                   |
| Dimensions                      | 27,3x5,6x7cm                         |
| Materials                       | aluminium                            |
| Ambient temperature range       | 0°C / +35°C                          |
| Performance ambient temperature | 25°C                                 |
| Notes                           | RAL 9005 black , driver not included |
| Energy class                    | F                                    |
| Net lamp weight                 | 0,90 kg                              |

### Codes

MPAT2110U67WNE

### Structure

black

### PACKAGE

Package 01

Dimension: 32,5x8x8,5 cm / Gross weight: 0,90 kg

### Certificazioni

