

# RIGA TRANSPARENT

Die RIGA-Familie umfasst flexible LED-Streifen für den Außenbereich, die sich besonders für eine dekorative Beleuchtung eignen.

Riga besteht aus einem 24V LED-Brand in einem weißen PVC-Profil, mit transparentem Polyurethanharz versiegelt, witterungsbeständig und mit einem hervorragendem Schutz gegen UV-Strahlen.

Bei der Riga mit transparentem Polyurethanharz wird das Licht von vorne ausgestrahlt.

Riga ist in unterschiedenen Standardlängen lieferbar.

Die Installation kann mit Halterungen (im Lieferumfang enthalten) erfolgen.



1M | 2700K

LAMPING

|                                 |                                                        |
|---------------------------------|--------------------------------------------------------|
| Source                          | Flexible LED strip                                     |
| Total power                     | 9,6W                                                   |
| Emission                        | direct 120°                                            |
| Switching                       | according to driver                                    |
| Tension                         | 24VDC                                                  |
| Color temperature               | 2700K                                                  |
| Luminous flux                   | 1650lm                                                 |
| Initial luminaire efficacy      | 146lm/W                                                |
| Initial chromaticity            | SDCM <3                                                |
| Typ CRI                         | 85                                                     |
| IP class                        | 68                                                     |
| Dimensions                      | 1,5x0,7x100cm                                          |
| Materials                       | resin + PVC                                            |
| Ambient temperature range       | -20°C / +50°C                                          |
| Performance ambient temperature | 25°C                                                   |
| Notes                           | driver not included, cable length 2m                   |
| Customization options           | body length, CCT 2700K                                 |
| Accessories                     | Connectors kit IP68,   Drivers 24VDC + DALI interface, |
| Net lamp weight                 | 0,22 kg                                                |

Codes

MRIG0910035DRE

PACKAGE

Package 01


Certificazioni




Structure

white

Dimension: 22x19x8 cm / Gross weight: 0,55 kg

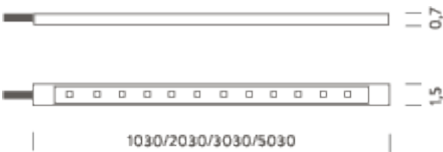

BRACKETS (included)



2M | 2700K

LAMPING

|                                 |                                                        |
|---------------------------------|--------------------------------------------------------|
| Source                          | Flexible LED strip                                     |
| Total power                     | 19,2W                                                  |
| Emission                        | direct 120°                                            |
| Switching                       | according to driver                                    |
| Tension                         | 24VDC                                                  |
| Color temperature               | 2700K                                                  |
| Luminous flux                   | 3300lm                                                 |
| Initial luminaire efficacy      | 146lm/W                                                |
| Initial chromaticity            | SDCM <3                                                |
| Typ CRI                         | 85                                                     |
| IP class                        | 68                                                     |
| Dimensions                      | 1,5x0,7x200cm                                          |
| Materials                       | resin + PVC                                            |
| Ambient temperature range       | -20°C / +50°C                                          |
| Performance ambient temperature | 25°C                                                   |
| Notes                           | driver not included, cable length 2m                   |
| Customization options           | body length, CCT 2700K                                 |
| Accessories                     | Connectors kit IP68,   Drivers 24VDC + DALI interface, |
| Net lamp weight                 | 0,48 kg                                                |

Codes

MRIG0920035DRE

PACKAGE

Package 01


Certificazioni



Structure

white

Dimension: 22x19x4,5 cm / Gross weight: 0,81 kg

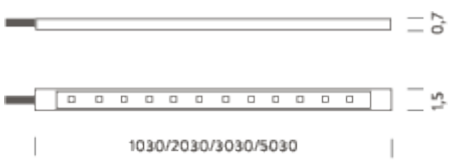

BRACKETS (included)



3M | 2700K

LAMPING

|                                 |                                                        |
|---------------------------------|--------------------------------------------------------|
| Source                          | Flexible LED strip                                     |
| Total power                     | 28,8W                                                  |
| Emission                        | direct 120°                                            |
| Switching                       | according to driver                                    |
| Tension                         | 24VDC                                                  |
| Color temperature               | 2700K                                                  |
| Luminous flux                   | 4950lm                                                 |
| Initial luminaire efficacy      | 146lm/W                                                |
| Initial chromaticity            | SDCM <3                                                |
| Typ CRI                         | 85                                                     |
| IP class                        | 68                                                     |
| Dimensions                      | 1,5x0,7x300cm                                          |
| Materials                       | esin + PVC                                             |
| Ambient temperature range       | -20°C / +50°C                                          |
| Performance ambient temperature | 25°C                                                   |
| Notes                           | driver not included, cable length 2m                   |
| Customization options           | body length, CCT 2700K                                 |
| Accessories                     | Connectors kit IP68,   Drivers 24VDC + DALI interface, |
| Net lamp weight                 | 0,72 kg                                                |

Codes

MRIG0930035DRE

PACKAGE

Package 01


Certificazioni




Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 0,84 kg

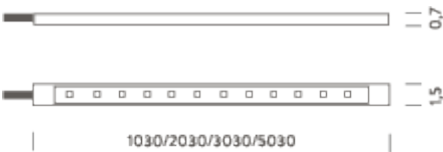

BRACKETS (included)



4M | 2700K

LAMPING

|                                 |                                                        |
|---------------------------------|--------------------------------------------------------|
| Source                          | Flexible LED strip                                     |
| Total power                     | 38,4W                                                  |
| Emission                        | direct 120°                                            |
| Switching                       | according to driver                                    |
| Tension                         | 24VDC                                                  |
| Color temperature               | 2700K                                                  |
| Luminous flux                   | 6600lm                                                 |
| Initial luminaire efficacy      | 146lm/W                                                |
| Initial chromaticity            | SDCM <3                                                |
| Typ CRI                         | 85                                                     |
| IP class                        | 68                                                     |
| Dimensions                      | 1,5x0,7x400cm                                          |
| Materials                       | resin + PVC                                            |
| Ambient temperature range       | -20°C / +50°C                                          |
| Performance ambient temperature | 25°C                                                   |
| Notes                           | driver not included, cable length 2m                   |
| Customization options           | body length, CCT 2700K                                 |
| Accessories                     | Connectors kit IP68,   Drivers 24VDC + DALI interface, |
| Net lamp weight                 | 0,96 kg                                                |

Codes

MRIG0940035DRE

PACKAGE

Package 01


Certificazioni



Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 1,08 kg

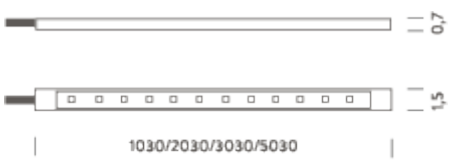

BRACKETS (included)



5M | 2700K

LAMPING

|                                 |                                                        |
|---------------------------------|--------------------------------------------------------|
| Source                          | Flexible LED strip                                     |
| Total power                     | 48W                                                    |
| Emission                        | direct 120°                                            |
| Switching                       | according to driver                                    |
| Tension                         | 24VDC                                                  |
| Color temperature               | 2700K                                                  |
| Luminous flux                   | 8250lm                                                 |
| Initial luminaire efficacy      | 146lm/W                                                |
| Initial chromaticity            | SDCM <3                                                |
| Typ CRI                         | 85                                                     |
| IP class                        | 68                                                     |
| Dimensions                      | 1,5x0,7x500cm                                          |
| Materials                       | resin + PVC                                            |
| Ambient temperature range       | -20°C / +50°C                                          |
| Performance ambient temperature | 25°C                                                   |
| Notes                           | driver not included, cable length 2m                   |
| Customization options           | body length, CCT 2700K                                 |
| Accessories                     | Connectors kit IP68,   Drivers 24VDC + DALI interface, |
| Net lamp weight                 | 1,2 kg                                                 |

Codes

MRIG0950035DRE

PACKAGE

Package 01


Certificazioni



Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 1,32 kg

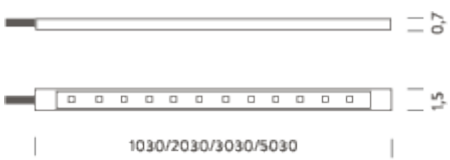

BRACKETS (included)

