

SALINA

Famille de spots encastrés downlight pour éclairage d'accentuation en intérieur. L'appareil peut être orienté à 30° verticalement et à 355° horizontalement pour diriger la lumière dans tous les sens. La structure modulaire sépare la lampe en plusieurs parties indépendantes. Les anneaux externes avec diverses finitions sont faciles à monter et peuvent être facilement remplacés pour satisfaire les exigences diverses d'ouverture et les effets esthétiques. Salina est disponible avec plusieurs accessoires d'optique pour satisfaire les différents besoins d'éclairage.



RECESSED TRIMLESS 15° | 2700K

LAMPING

Source	LED
Total power	10W
Emission	direct adjustable 15°
Switching	according to driver
Tension	max 270mA
Color temperature	2700K
Luminous flux	640lm
Initial luminaire efficacy	64lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,1x9,5cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Energy class
Accessories
Net lamp weight

driver and ring not included, orientable spot,
trimless recessed hole Ø 77mm, depth 150mm,
trim recessed hole Ø 75mm, cable length 0,4m
F
Drivers, Salina | Ring,
0,27 kg

Codes

SAL LW2 61

Structure

white

PACKAGE


Package 01

Dimension: 46x42x22 cm / Gross weight: 0,31 kg


Certificazioni



SALINA TRIMLESS

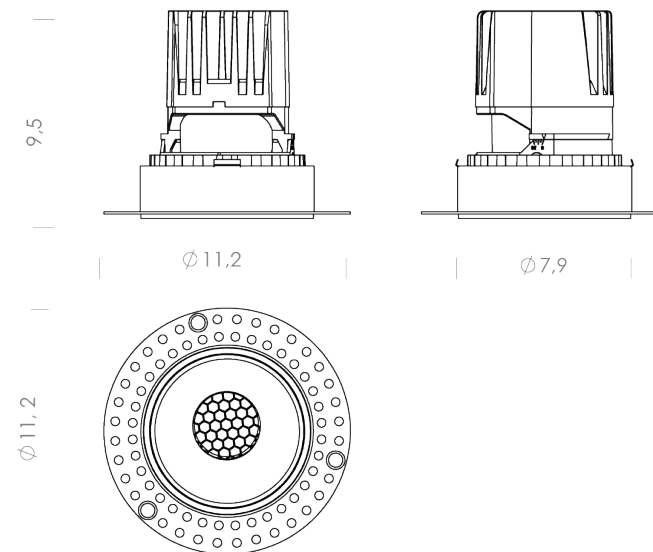

SALINA TRIM

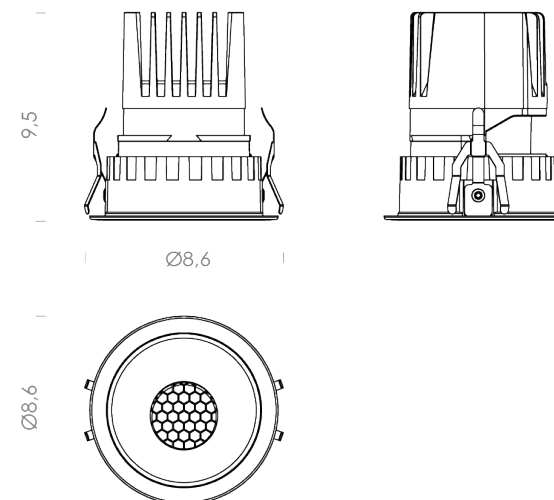

RECESSED TRIMLESS 15° | 3000K

LAMPING

Source	LED
Total power	10W
Emission	direct adjustable 15°
Switching	according to driver
Tension	max 270mA
Color temperature	2700K
Luminous flux	740lm
Initial luminaire efficacy	74lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,1x9,5cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	driver and ring not included, orientable spot, trimless recessed hole Ø 77mm, depth 150mm, trim recessed hole Ø 75mm, cable length 0,4m

Energy class	F
Accessories	Drivers, Salina Ring,
Net lamp weight	0,27 kg

Codes

SAL LW3 61

PACKAGE

Package 01

Certificazioni




LED
10W
direct adjustable 15°
according to driver
max 270mA
2700K
740lm
74lm/W
SDCM<3
90
20
ø7,1x9,5cm
0°C / +35°C
25°C
driver and ring not included, orientable spot, trimless recessed hole Ø 77mm, depth 150mm, trim recessed hole Ø 75mm, cable length 0,4m
F
Drivers, Salina Ring,
0,27 kg

Structure


white

Dimension: 46x42x22 cm / Gross weight: 0,31 kg

SALINA TRIMLESS

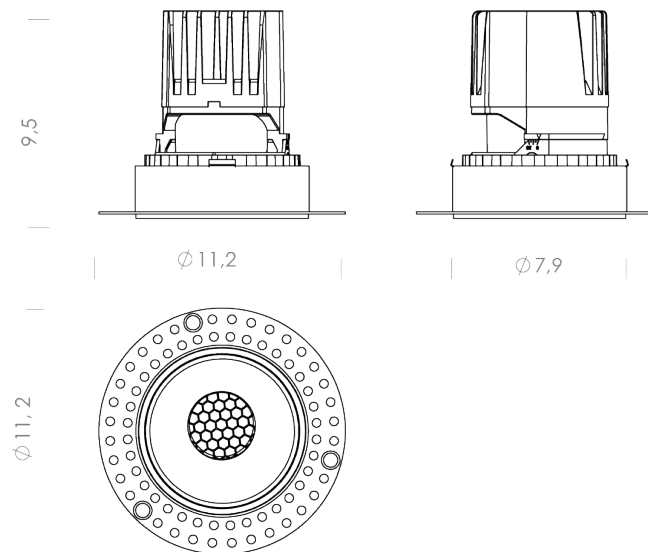

SALINA TRIM

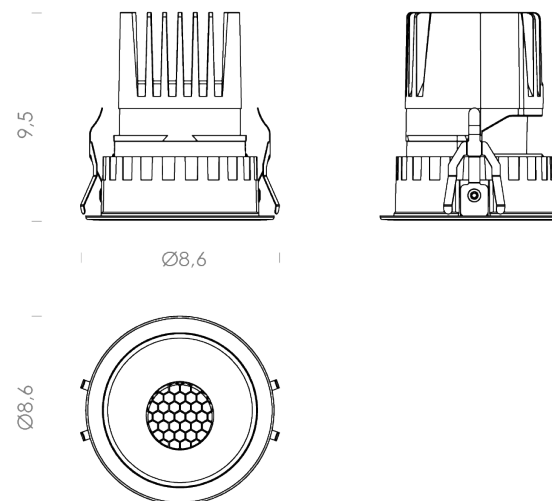

RECESSED TRIMLESS 35° | 3000K

LAMPING

Source	LED
Total power	10W
Emission	direct adjustable 35°
Switching	according to driver
Tension	max 270mA
Color temperature	3000K
Luminous flux	770lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,1x9,5cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	driver and ring not included, orientable spot, trimless recessed hole Ø 77mm, depth 150mm, trim recessed hole Ø 75mm, cable length 0,4m

Energy class	F
Accessories	Drivers, Salina Ring,
Net lamp weight	0,27 kg

Codes

SAL LW3 63

PACKAGE

Package 01

Certificazioni




LED	driver and ring not included, orientable spot, trimless recessed hole Ø 77mm, depth 150mm, trim recessed hole Ø 75mm, cable length 0,4m
10W	
direct adjustable 35°	
according to driver	
max 270mA	
3000K	
770lm	
77lm/W	
SDCM<3	
90	
20	
ø7,1x9,5cm	
0°C / +35°C	
25°C	
driver and ring not included, orientable spot, trimless recessed hole Ø 77mm, depth 150mm, trim recessed hole Ø 75mm, cable length 0,4m	
F	
Drivers, Salina Ring,	
0,27 kg	

Structure


white

Dimension: 46x42x22 cm / Gross weight: 0,31 kg

SALINA TRIMLESS

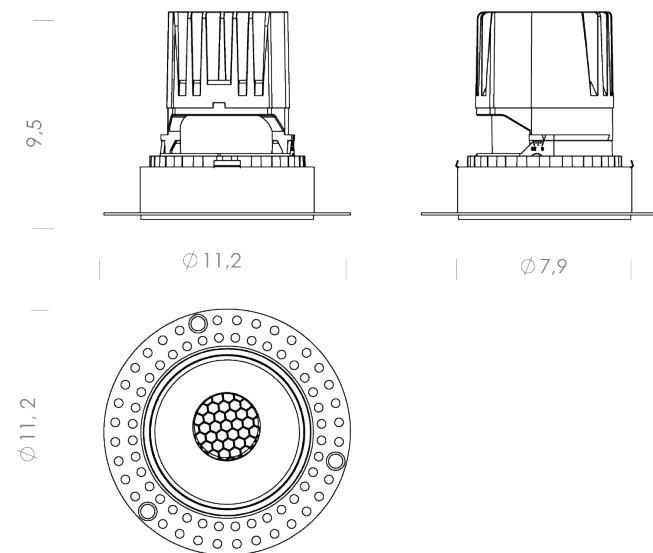

SALINA TRIM

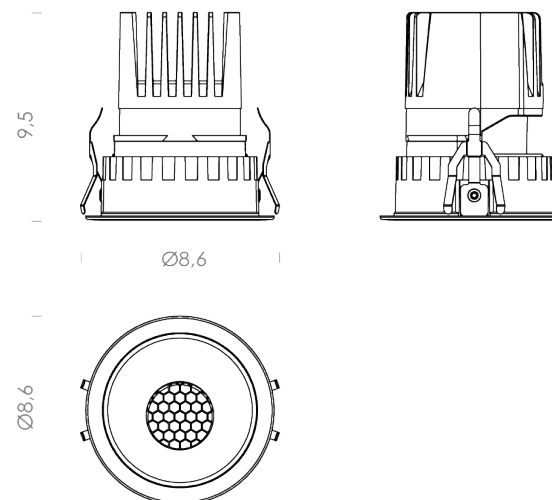

RECESSED TRIMLESS 35° | 2700K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Ambient temperature range
Performance ambient temperature
Notes

LED
10W
direct adjustable 35°
according to driver
max 270mA
2700K
670lm
67lm/W
SDCM<3
90
20
ø7,1x9,5cm
0°C / +35°C
25°C
driver and ring not included, orientable spot,
trimless recessed hole Ø 77mm, depth 150mm,
trim recessed hole Ø 75mm, cable length 0,4m
F
Drivers, Salina | Ring,
0,27 kg

Energy class
Accessories
Net lamp weight

Codes

SAL LW2 63

Structure

white

PACKAGE


Package 01

Dimension: 46x42x22 cm / Gross weight: 0,31 kg


Certificazioni



SALINA TRIMLESS

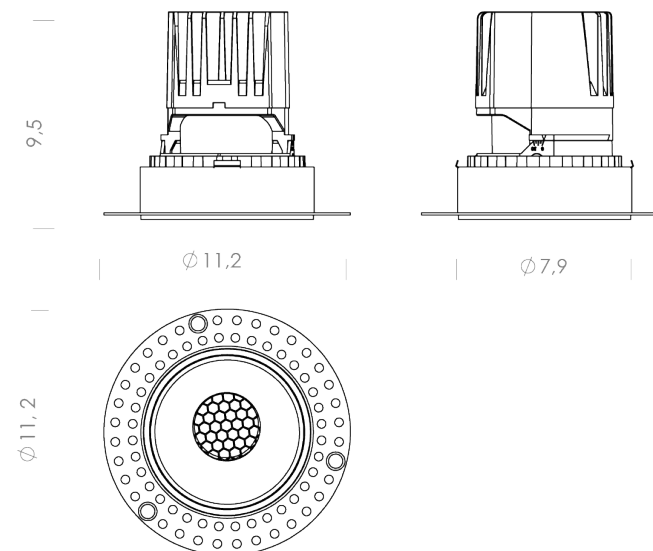

SALINA TRIM

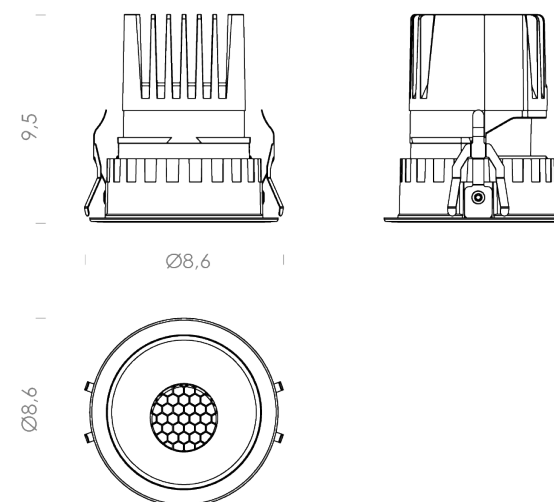

RECESSED TRIM 15° | 2700K

LAMPING

Source	LED
Total power	10W
Emission	direct adjustable 15°
Switching	according to driver
Tension	max 270mA
Color temperature	2700K
Luminous flux	700lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,1x9,5cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	driver and ring not included, orientable spot, trimless recessed hole Ø 77mm, depth 150mm, trim recessed hole Ø 75mm, cable length 0,4m

Energy class	F
Accessories	Drivers, Salina Ring,
Net lamp weight	0,31 kg

Codes

SAT LW2 61
SAT LN2 61

Structure

white
black

PACKAGE


Package 01

Dimension: 46x42x22 cm / Gross weight: 0,34 kg


Certificazioni



SALINA TRIMLESS

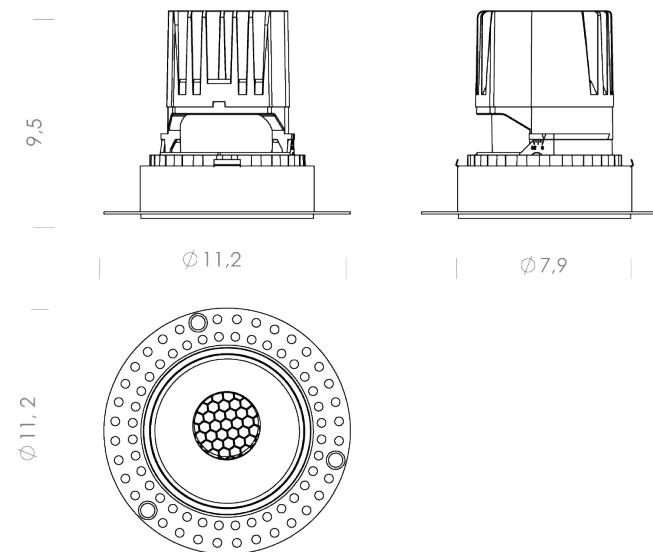

SALINA TRIM

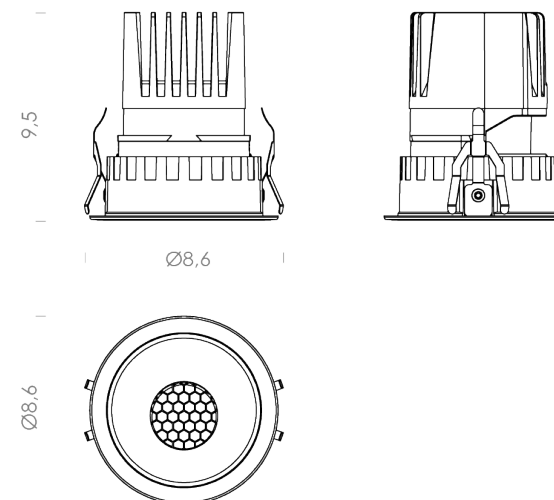

RECESSED TRIM 15° | 3000K

LAMPING

Source	LED
Total power	10W
Emission	direct adjustable 15°
Switching	according to driver
Tension	max270mA
Color temperature	3000K
Luminous flux	740lm
Initial luminaire efficacy	74lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø9x9,5cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Energy class
Accessories
Net lamp weight

driver and ring not included, orientable spot,
trimless recessed hole Ø 77mm, depth 150mm,
trim recessed hole Ø 75mm, cable length 0,4m
F
Drivers, Salina | Ring,
0,31 kg

Codes

SAT LW3 61
SAT LN3 61

Structure

white
black

PACKAGE


Package 01

Dimension: 46x42x22 cm / Gross weight: 0,34 kg


Certificazioni



SALINA TRIMLESS

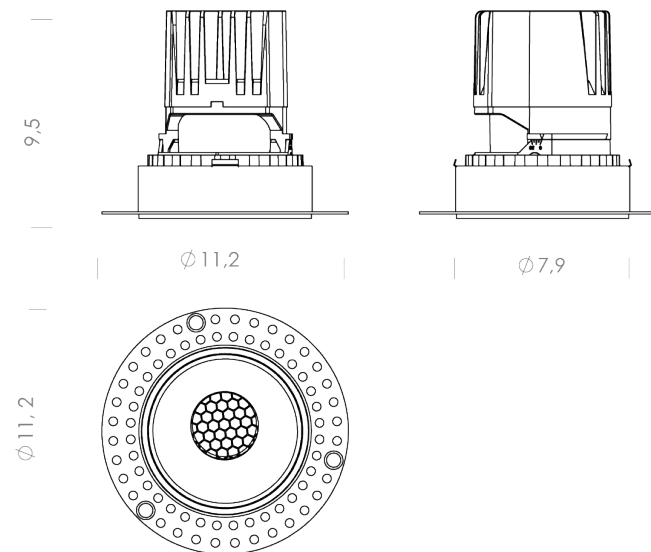

SALINA TRIM

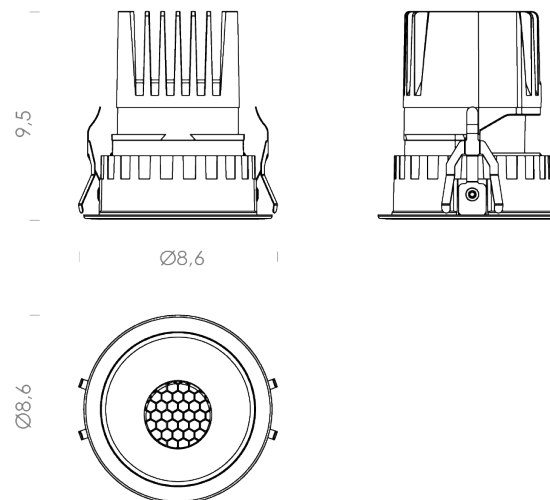

RECESSED TRIM 35° | 3000K

LAMPING

Source	LED
Total power	10W
Emission	direct adjustable 35°
Switching	according to driver
Tension	max 270mA
Color temperature	3000K
Luminous flux	770lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø9x9,5cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	driver and ring not included, orientable spot, trimless recessed hole Ø 77mm, depth 150mm, trim recessed hole Ø 75mm, cable length 0,4m

Energy class	F
Accessories	Drivers, Salina Ring,
Net lamp weight	0,31 kg

Codes

SAT LW3 63
SAT LN3 63

Structure

white
black

PACKAGE


Package 01

Dimension: 46x42x22 cm / Gross weight: 0,34 kg


Certificazioni



SALINA TRIMLESS

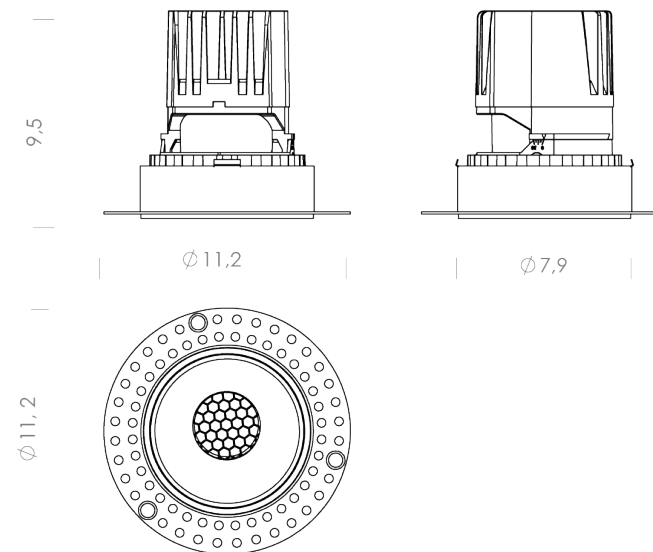

SALINA TRIM

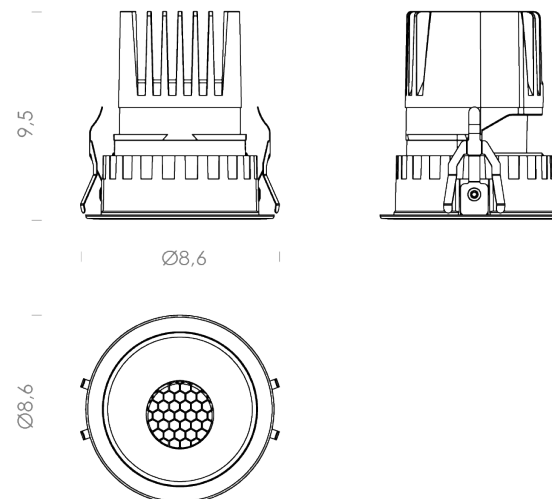

RECESSED TRIM 35° | 2700K

LAMPING

Source	LED
Total power	10W
Emission	direct adjustable 35°
Switching	according to driver
Tension	max 270mA
Color temperature	2700K
Luminous flux	670lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø9x9,5cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

driver and ring not included, orientable spot,
trimless recessed hole Ø 77mm, depth 150mm,
trim recessed hole Ø 75mm, cable length 0,4m
F
Drivers, Salina Ring,
0,31 kg

Energy class
Accessories
Net lamp weight

Codes

SAT LW2 63
SAT LN2 63

Structure

white
black

PACKAGE


Package 01

Dimension: 46x42x22 cm / Gross weight: 0,34 kg

Certificazioni



SALINA TRIMLESS

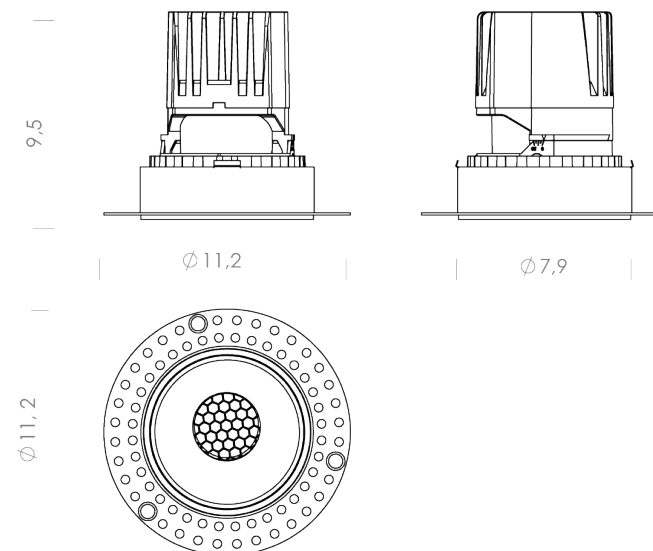

SALINA TRIM

