


SLACKLINE IP67

Die SLACKLINE-Kollektion wird durch die IP67-Version vervollständigt, die für die Akzent- und Wegelbeleuchtung im Freien entwickelt ist. Sie zeichnet sich durch ein schlichtes Design und die Opalharzbeschichtung des LED-Bandes aus, die die angegebene IP-Schutzart garantiert, und wird in verschiedenen Längen und mit zwei Farbtemperaturen angeboten. SLACKLINE IP67 ist das ideale Produkt zur Realisierung von Lichtlinienlösungen für spezifische Projektanforderungen im Freien oder in Umgebungen, die einen höheren Schutzgrad erfordern. Sie wird mit Hilfe der mitgelieferten Halterungen an der Decke befestigt.

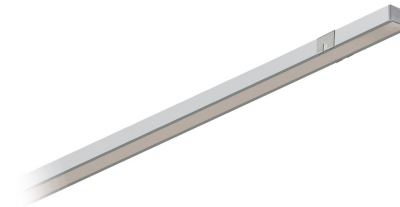

1M | 3000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	457lm
Initial luminaire efficacy	30lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	101x2,3x1,5cm
Materials	aluminium
Performance ambient temperature	25°C
Notes	driver not included cable length 0,5m
Customization options	CCT 2700K, body length recessed, suspended, wall version

Codes

BSLAS810G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm

Certificazioni



SLACKLINE IP67

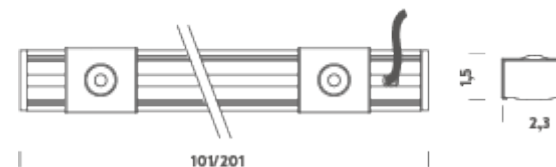

1M | 4000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	540lm
Initial luminaire efficacy	36lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	101x2,3x1,5cm
Materials	aluminium
Performance ambient temperature	25°C
Notes	driver not included cable length 0,5m
Customization options	CCT 2700K, body length recessed, suspended, wall version

Codes

BSLAS810G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm

Certificazioni



SLACKLINE IP67

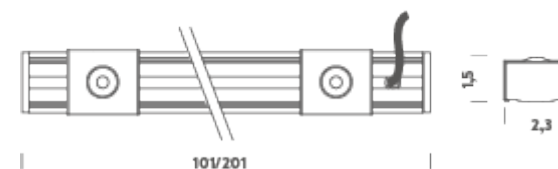

2M | 3000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	914lm
Initial luminaire efficacy	30lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	201x2,3x1,5cm
Materials	aluminium
Performance ambient temperature	25°C
Notes	driver not included cable length 0,5m
Customization options	CCT 2700K, body length recessed, suspended, wall version

Codes

BSLAS820G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm

Certificazioni



SLACKLINE IP67

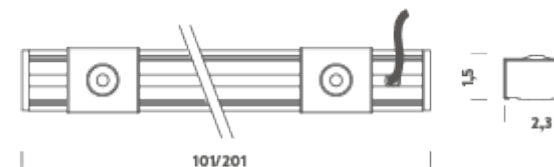

2M | 4000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1080lm
Initial luminaire efficacy	36lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	201x2,3x1,5cm
Materials	aluminium
Performance ambient temperature	25°C
Notes	driver not included cable length 0,5m
Customization options	CCT 2700K, body length recessed, suspended, wall version

Codes

BSLAS820G26NAA

Structure

grey

PACKAGE

Package 01

Dimension: 205x11x2,5 cm

Certificazioni



SLACKLINE IP67

