

SLACKLINE MICRO


Die SLACKLINE-Familie besteht aus einer großen Auswahl an Aluminiumprofilen mit unterschiedlichen Befestigungen mit derselben LED-LEuchtmittel, die die Slackline-Installation in jedem Ambiente sehr flexibel macht:

Slackline Trim, Slackline Regular und Slackline Micro.

Minimales Design mit hoher Lichtqualität.

Slackline eignet sich für lineare Verbindungslösungen (auf Anfrage).

Je nach Befestigung wird es in unterschiedlichen Standardlängen mit CRI > 94 angeboten.

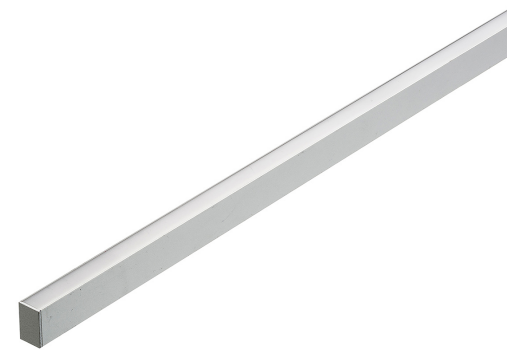

1M - 3000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	457lm
Initial luminaire efficacy	30lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
IP class	40
Dimensions	1,5x1x98,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,2 kg

Codes

BSLM0410G65WAA

Structure

grey

PACKAGE

Package 01

Dimension: 100x5x5 cm / Gross weight: 0,2 kg

Certificazioni



1M - 4000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	540lm
Initial luminaire efficacy	36lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
IP class	40
Dimensions	1,5x1x98,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,2 kg

Codes

BSLM0410G65NAA

Structure

grey

PACKAGE

Package 01

Dimension: 100x5x5 cm / Gross weight: 0,2 kg

Certificazioni



2M - 3000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	914lm
Initial luminaire efficacy	30lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
IP class	40
Dimensions	1,5x1x198,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,4 kg

Codes

BSLM0420G65WAA

Structure

grey

PACKAGE

Package 01 Dimension: 200x5x5 cm / Gross weight: 0,4 kg

Certificazioni



2M - 4000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1080lm
Initial luminaire efficacy	36lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
IP class	40
Dimensions	1,5x1x198,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,4 kg

Codes

BSLM0420G65NAA

Structure

grey

PACKAGE

Package 01 Dimension: 200x5x5 cm / Gross weight: 0,4 kg

Certificazioni



LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1377lm
Initial luminaire efficacy	31lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	1,5x1x298,5cm
Materials	anodized aluminium
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,60 kg

Codes

BSLM0430G65WAA

Structure

grey

PACKAGE

Package 01 Dimension: 300x5x5 cm / Gross weight: 0,60 kg

Certificazioni



3M | 4000K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	4000K
Initial luminaire efficacy	36lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	1,5x1x298,5cm
Materials	anodized aluminium
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,6 kg

Codes

BSLM0430G65NAA

Structure

grey

PACKAGE

Package 01 Dimension: 300x5x5 cm / Gross weight: 0,6 kg

Certificazioni

