

SLACKLINE REGULAR

Die SLACKLINE-Familie besteht aus einer großen Auswahl an Aluminiumprofilen mit unterschiedlichen Befestigungen mit derselben LED-LEuchtmittel, die die Slackline-Installation in jedem Ambiente sehr flexibel macht:

Slackline Trim, Slackline Regular und Slackline Micro.

Minimales Design mit hoher Lichtqualität.

Slackline eignet sich für lineare Verbindungslösungen (auf Anfrage).

Je nach Befestigung wird es in unterschiedlichen Standardlängen mit CRI > 94 angeboten.



RECESSED | 1M - 3000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM <3
Typ CRI	97
IP class	40
Dimensions	5,14x1,35x100,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Energy class	F
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA2110G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg


Certificazioni




SUSPENDED

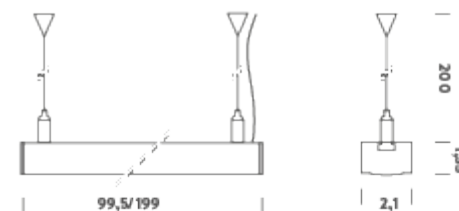


CEILING



RECESSED

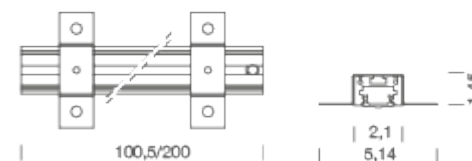

WALL MOUNTED



RECESSED | 1M - 4000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	890lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM <3
Typ CRI	94
IP class	40
Dimensions	5,14x1,35x100,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Energy class	E
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA2110G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni




SUSPENDED

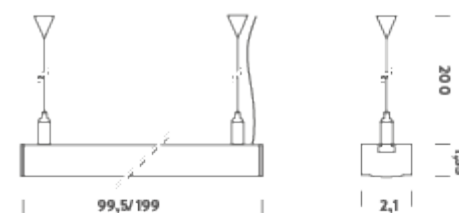


CEILING



RECESSED

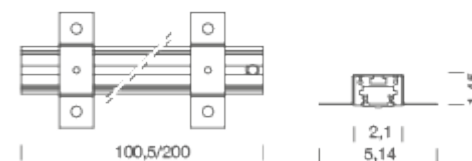

WALL MOUNTED



RECESSED | 2M - 3000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1720lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM <3
Typ CRI	97
IP class	40
Dimensions	5,14x1,35x200cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Energy class	F
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA2120G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni




SUSPENDED

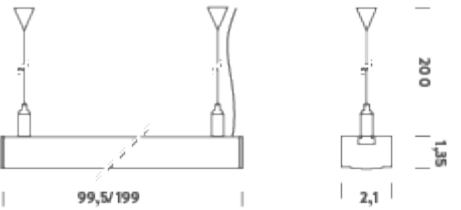


CEILING



RECESSED

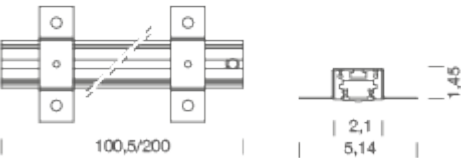

WALL MOUNTED



RECESSED | 2M - 4000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1780lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM <3
Typ CRI	94
IP class	40
Dimensions	5,14x1,35x200cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Energy class	E
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA2120G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni




SUSPENDED

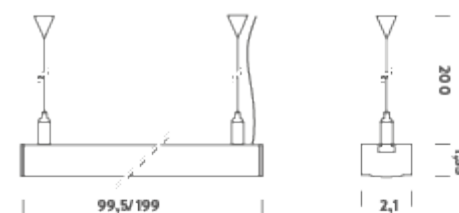


CEILING



RECESSED

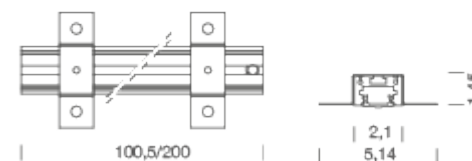

WALL MOUNTED



PENDANT | 1M - 3000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM <3
Typ CRI	97
IP class	40
Dimensions	2,1x1,35x99,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Energy class	F
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA0310G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg


Certificazioni




SUSPENDED

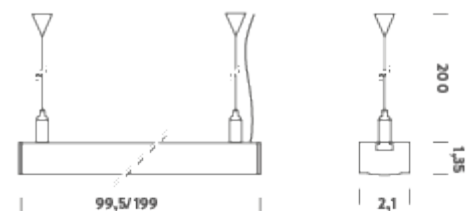

CEILING

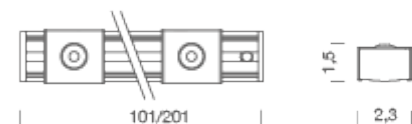

RECESSED

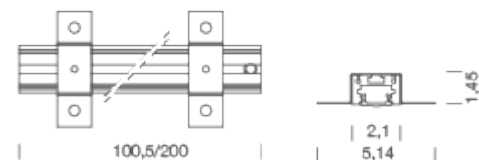

WALL MOUNTED



PENDANT | 1M - 4000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	890lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM <3
Typ CRI	94
IP class	40
Dimensions	2,1x1,35x99,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Energy class	E
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA0310G26NAA


Structure

grey

PACKAGE

Package 01 Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni

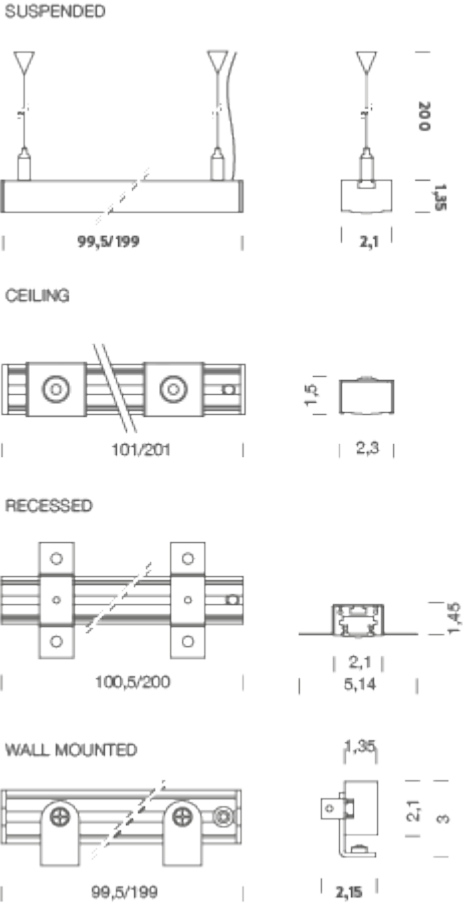

PENDANT | 2M - 3000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1720lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM <3
Typ CRI	97
IP class	40
Dimensions	2,1x1,35x199,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Energy class	F
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA0320G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg


Certificazioni




SUSPENDED

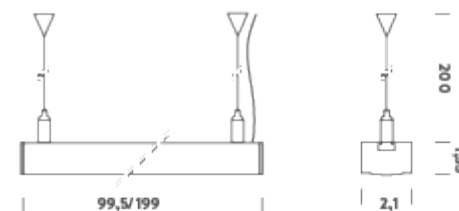


CEILING



RECESSED

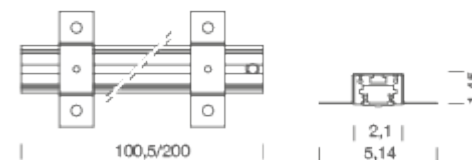

WALL MOUNTED



PENDANT | 2M - 4000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according do driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1780lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM <3
Typ CRI	94
IP class	40
Dimensions	2,1x1,35x199,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Energy class	E
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA0320G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni




SUSPENDED

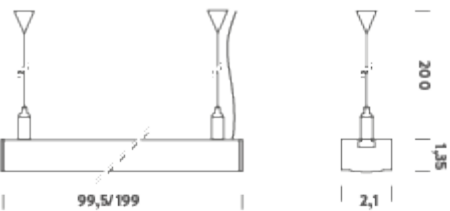


CEILING



RECESSED

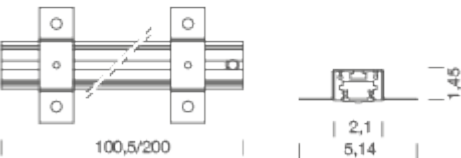

WALL MOUNTED

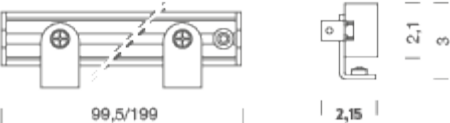

CEILING | 1M - 3000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM <3
Typ CRI	97
IP class	40
Dimensions	2,3x1,5x101cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Energy class	F
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA0410G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg


Certificazioni




SUSPENDED

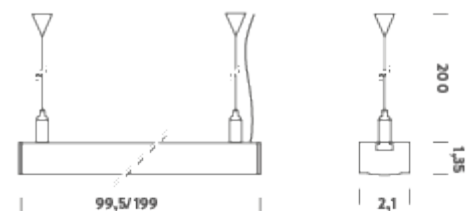

CEILING

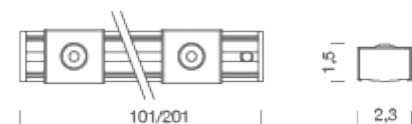

RECESSED

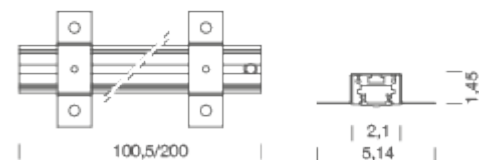

WALL MOUNTED



CEILING | 1M - 4000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	890lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM <3
Typ CRI	94
IP class	40
Dimensions	2,3x1,5x101cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Energy class	E
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA0410G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni




SUSPENDED

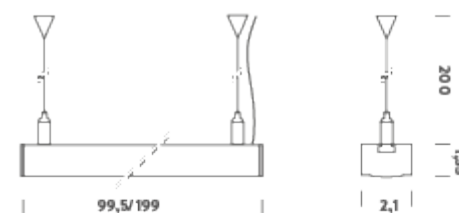


CEILING



RECESSED

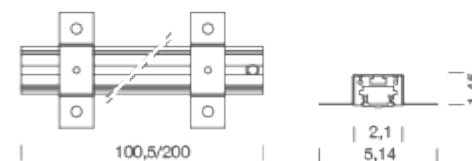

WALL MOUNTED



CEILING | 2M - 3000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1720lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM <3
Typ CRI	97
IP class	40
Dimensions	2,3x1,5x201cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Energy class	F
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA0420G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg


Certificazioni




SUSPENDED

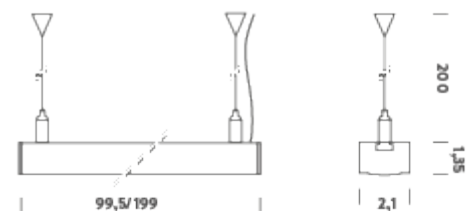

CEILING

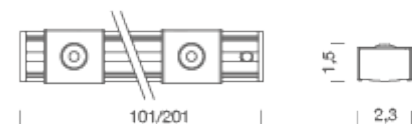

RECESSED

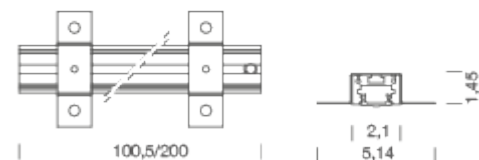

WALL MOUNTED



CEILING | 2M - 4000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1780lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM <3
Typ CRI	94
IP class	40
Dimensions	2,3x1,5x201cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Energy class	E
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA0420G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg


Certificazioni




SUSPENDED

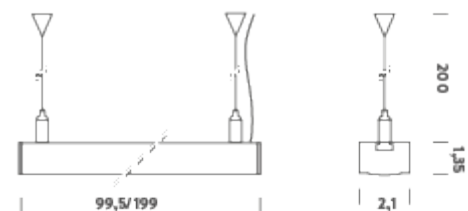

CEILING

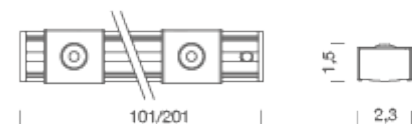

RECESSED

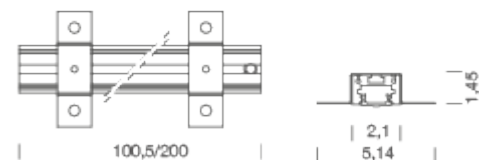

WALL MOUNTED



WALL | 1M - 3000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM <3
Typ CRI	97
IP class	40
Dimensions	2,25x2,15x99,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Energy class	F
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA4010G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni




SUSPENDED

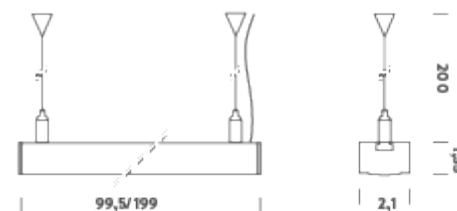


CEILING



RECESSED

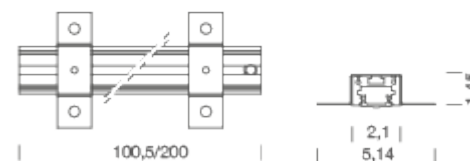

WALL MOUNTED

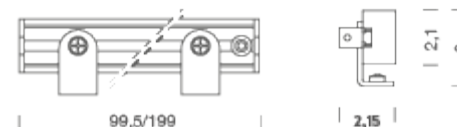

WALL | 1M - 4000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	890lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM <3
Typ CRI	94
IP class	40
Dimensions	2,25x2,15x99,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Energy class	E
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA4010G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg


Certificazioni




SUSPENDED

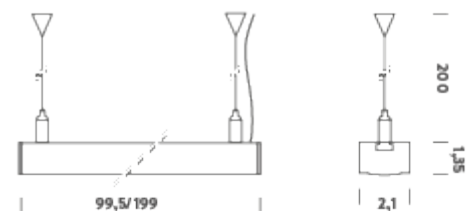

CEILING

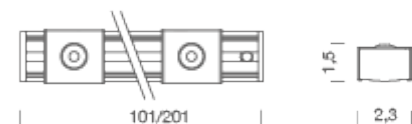

RECESSED

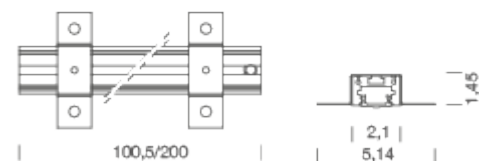

WALL MOUNTED



WALL | 2M - 3000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1720lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM <3
Typ CRI	97
IP class	40
Dimensions	2,25x2,15x199cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Energy class	F
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA4020G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg


Certificazioni




SUSPENDED

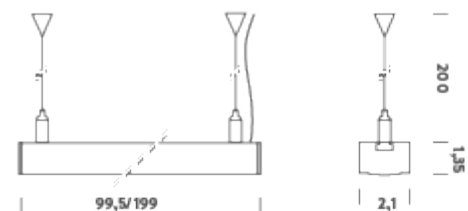

CEILING

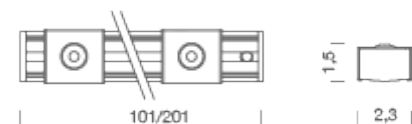

RECESSED

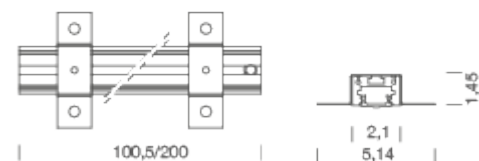

WALL MOUNTED



WALL | 2M - 4000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1780lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM <3
Typ CRI	94
IP class	40
Dimensions	2,25x2,15x199cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Energy class	E
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA4020G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg


Certificazioni




SUSPENDED

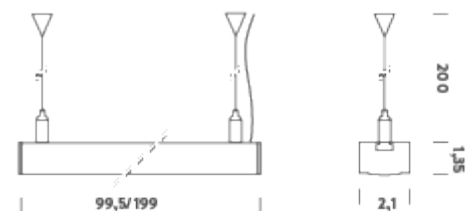

CEILING

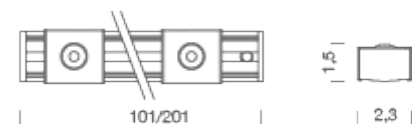

RECESSED

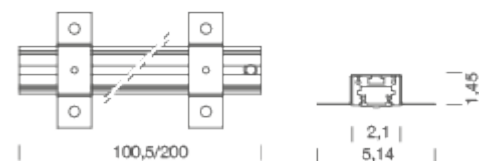

WALL MOUNTED

