

WALKLINE FAÇADE

Walkline Façade ist ein LED-Deckenbeleuchtungssystem für den Außenbereich zur Beleuchtung von Fassaden. Es besteht aus einem eloxierten Aluminiumprofil und einer vergossenen transparenten Abdeckung. Walkline Façade ist schwenkbar und in verschiedenen Längen und mit einer 30° Wallwasher-Optik erhältlich. Es ist dimmbar mit 1-10V, DALI oder DMX.



0,61M | 3000K

LAMPING

Source	LED strip
Total power	11W
Emission	wallwasher 30°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1030lm
Initial luminaire efficacy	94lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	61,4x3x4,6cm
Materials	aluminium + PU resin
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m
Customization options	CCT 2700K, body length
Energy class	F
Net lamp weight	1,5 kg

Codes

BWLFS806452WAA

Structure


grey

PACKAGE

Package 01

Dimension: 63x3x9 cm / Gross weight: 1,5 kg

Certificazioni

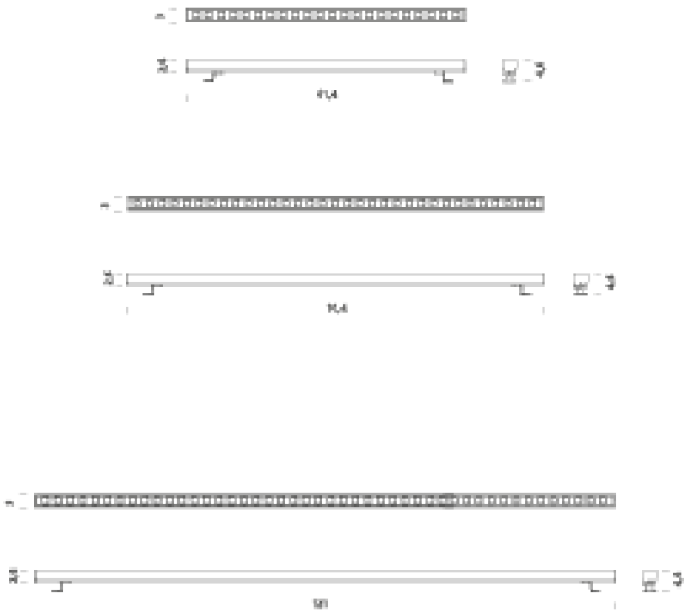

0,61M | 4000K

LAMPING

Source	LED strip
Total power	11W
Emission	wallwasher 30°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1144lm
Initial luminaire efficacy	104lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	61,4x3x4,6cm
Materials	aluminium + PU resin
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m
Customization options	CCT 2700K, body length
Energy class	F
Net lamp weight	1,5 kg

Codes

BWLFS806452NAA

Structure


grey

PACKAGE

Package 01

Dimension: 63x3x9 cm / Gross weight: 1,5 kg

Certificazioni

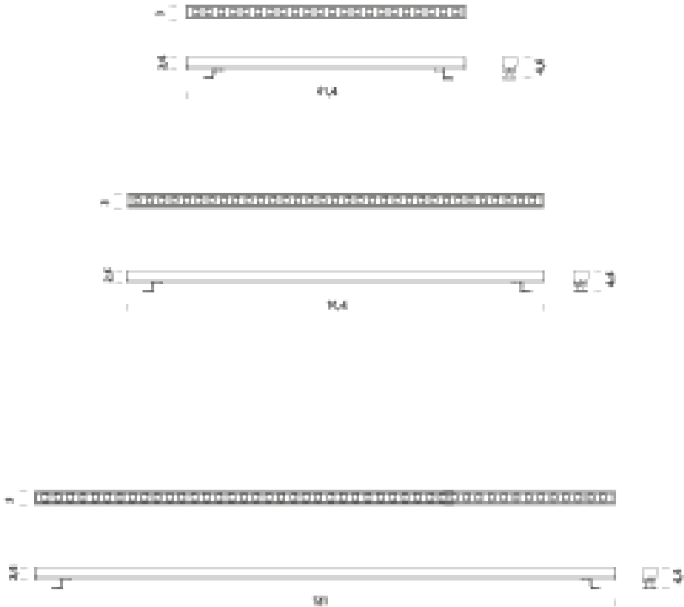

0,91M | 3000K

LAMPING

Source	LED strip
Total power	16W
Emission	wallwasher 30°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2060lm
Initial luminaire efficacy	129lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	91,4x3x4,6cm
Materials	aluminium + PU resin
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m
Customization options	CCT 2700K, body length
Energy class	F
Net lamp weight	2,3 kg

Codes

BWLFS809452WAA

Structure


grey

PACKAGE

Package 01

Dimension: 93x3x9 cm / Gross weight: 2,3 kg

Certificazioni

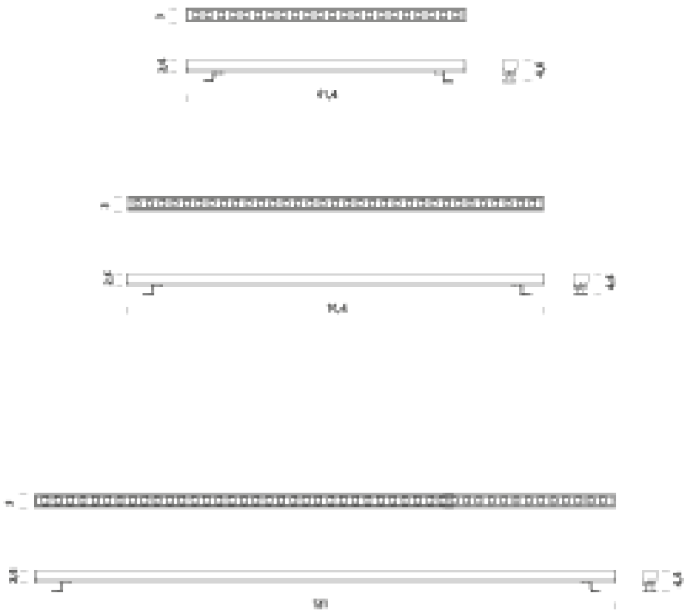

0,91M | 4000K

LAMPING

Source	LED strip
Total power	16W
Emission	wallwasher 30°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2228lm
Initial luminaire efficacy	139lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	91,4x3x4,6cm
Materials	aluminium + PU resin
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m
Customization options	CCT 2700K, body length
Energy class	F
Net lamp weight	2,3 kg

Codes

BWLFS809452NAA

Structure


grey

PACKAGE

Package 01

Dimension: 93x3x9 cm / Gross weight: 2,3 kg

Certificazioni

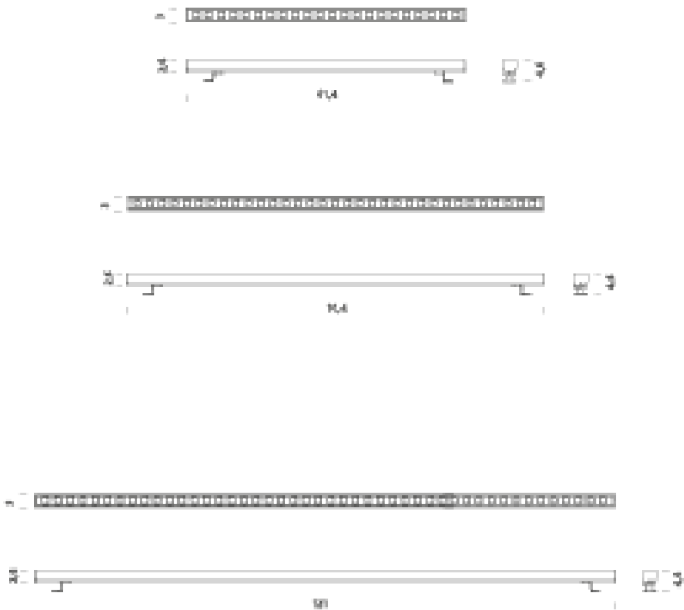

1,21M | 3000K

LAMPING

Source	LED strip
Total power	22W
Emission	wallwasher 30°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	3433lm
Initial luminaire efficacy	156lm/m
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	121,4x3x4,6cm
Materials	aluminium + PU resin
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m
Customization options	CCT 2700K, body length
Energy class	F
Net lamp weight	3 kg

Codes

BWLFS812452WAA

PACKAGE

Package 01


Certificazioni



Structure

grey

Dimension: 123x3x9 cm / Gross weight: 3 kg

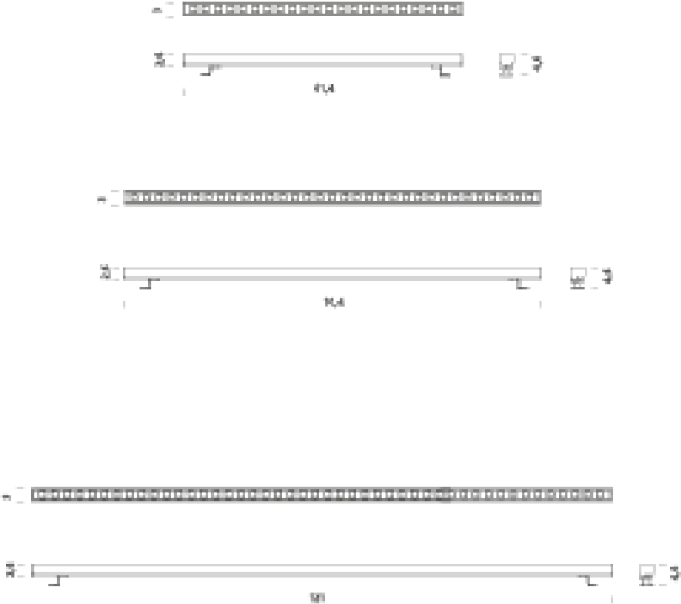

1,21M | 4000K

LAMPING

Source	LED strip
Total power	22W
Emission	wallwasher 30°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3815lm
Initial luminaire efficacy	173lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	121,4x3x4,6cm
Materials	aluminium + PU resin
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m
Customization options	CCT 2700K, body length
Energy class	F
Net lamp weight	3 kg

Codes

BWLFS812452NAA

Structure

grey

PACKAGE

Package 01

Dimension: 123x3x9 cm / Gross weight: 3 kg

Certificazioni

