

ZIRKOL CEILING

Dem modernen Purismus der Zirkol-Kollektion entspricht die neue Zirkol Ceiling: ILTI Luce bietet zum ersten Mal eine Deckenanwendung des Zirkol Circle an. Der harmonische kreisförmige Körper verschmilzt mit einem linearen Element, das den integrierten Treiber in einer magnetischen Box versteckt. Erhältlich in verschiedenen Größen, erfüllt Zirkol Ceiling sowohl private als auch professionelle Bedürfnisse und vermeidet die Installation von externem Zubehör.



Ø 0,85M | 2700K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
35W
Diffused
DALI
24V
2700K
2000lm
57lm/W
SDCM<3
90
40
ø85m x 5cm
aluminium
0°C / +35°C
25°C
integrated driver box with 1 x driver Superslim
60W Dali2/Push Dali (220/240V) | RAL 9005 black |
RAL 9016 white | shipped assembled
lumen output, finish
E
3 kg

Customization options
Energy class
Net lamp weight

Codes

BZRCD408G15DBO
BZRCD408G15DNE
BZRCD408G15DOR

Structure

white
black
gold

PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



ZIRKOL CEILING 0,8-1,5 M

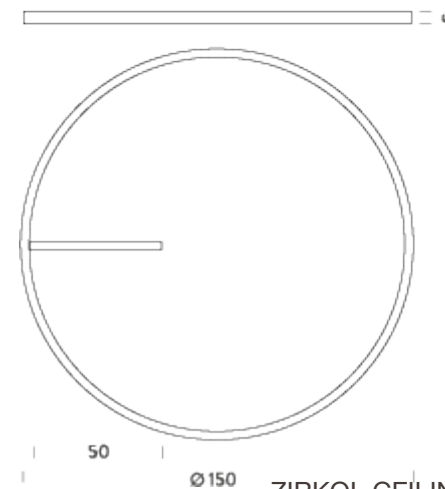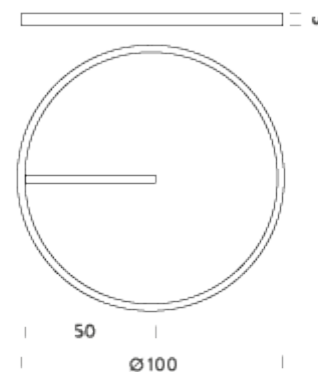

Ø 0,85M | 3000K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
35W
Diffused
DALI
24V
3000K
2200lm
63lm/W
SDCM<3
90
40
ø85m x 5cm
aluminium
0°C / +35°C
25°C
integrated driver box with 1 x driver Superslim
60W Dali2/Push Dali (220/240V) | RAL 9005 black |
RAL 9016 white | shipped assembled
lumen output, finish
E
3 kg

Customization options
Energy class
Net lamp weight

Codes

BZRCD408G15WBO
BZRCD408G15WNE
BZRCD408G15WOR

Structure

white
black
gold

PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



ZIRKOL CEILING 0,8-1,5 M

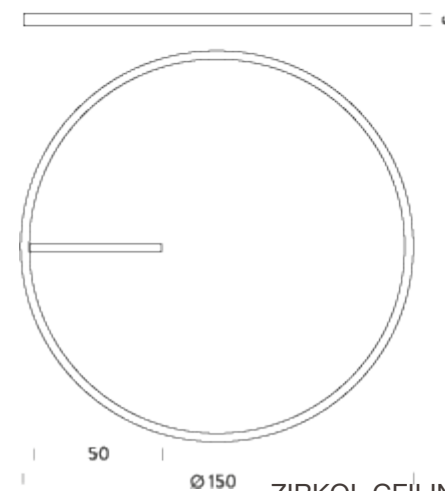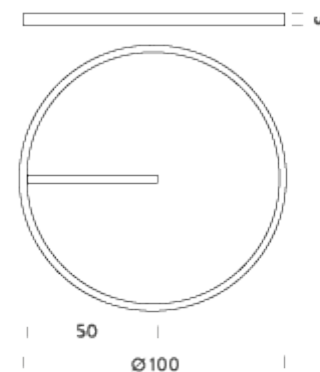

Ø 0,85M | 4000K

LAMPING

Source	LED strip
Total power	35W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	2360lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options
Energy class
Net lamp weight

integrated driver box with 1 x driver Superslim
60W Dali2/Push Dali (220/240V) | RAL 9005 black |
RAL 9016 white | shipped assembled
lumen output, finish
D
3 kg

Codes

BZRCD408G15NBO
BZRCD408G15NNE
BZRCD408G15NOR

Structure

white
black
gold

PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



ZIRKOL CEILING 0,8-1,5 M

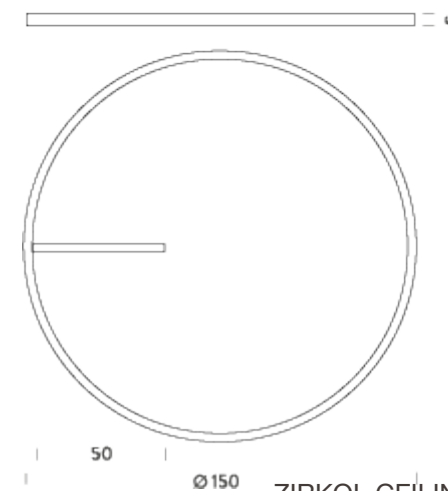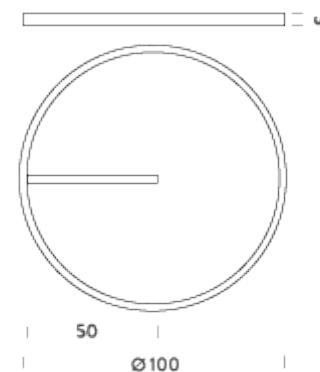

Ø 1M | 2700K

LAMPING

Source	LED strip
Total power	45W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	2616lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø 1m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options
Energy class
Net lamp weight

integrated driver box with 1 x driver Superslim
60W Dali2/Push Dali (220/240V) | RAL 9005 black |
RAL 9016 white | shipped assembled
lumen output, finish
E
4 kg

Codes

BZRCD410G15DBO
BZRCD410G15DNE
BZRCD410G15DOR

Structure

white
black
gold

PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

Certificazioni



ZIRKOL CEILING 0,8-1-1,5 M

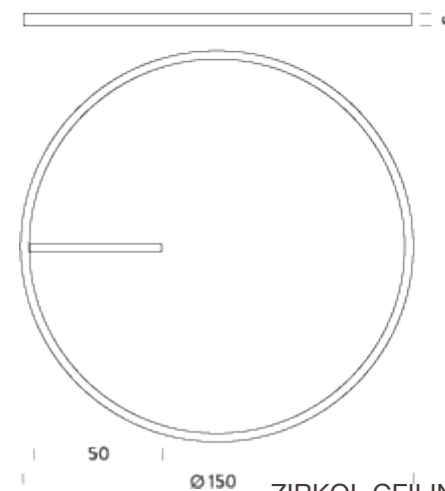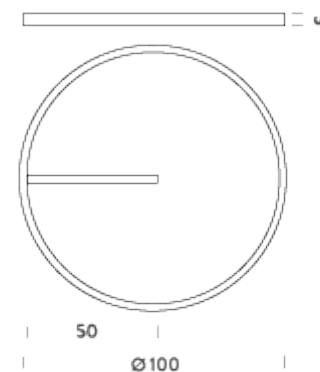

Ø 1M | 3000K

LAMPING

Source	LED strip
Total power	45W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	2769lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø 1m x 5cm
Materials	aluminimu
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options
Energy class
Net lamp weight

integrated driver box with 1 x driver Superslim
60W Dali2/Push Dali (220/240V) | RAL 9005 black |
RAL 9016 white | shipped assembled
lumen output, finish
E
4 kg

Codes

BZRCD410G15WBO
BZRCD410G15WNE
BZRCD410G15WOR

Structure

white
black
gold

PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

Certificazioni



ZIRKOL CEILING 0,8-1-1,5 M

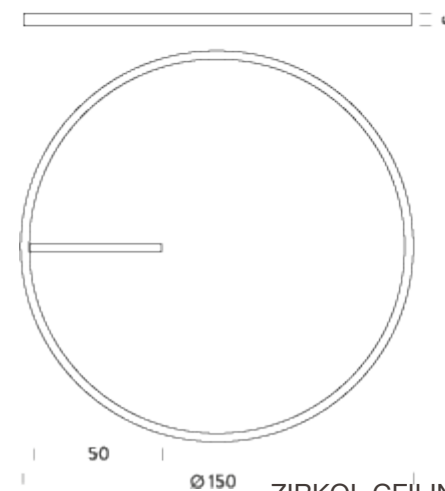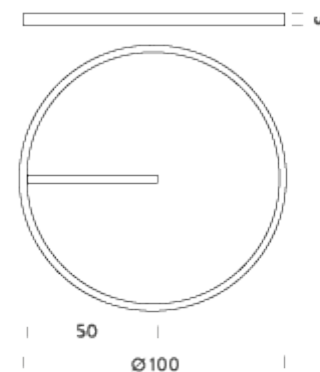

Ø 1M | 4000K

LAMPING

Source	LED strip
Total power	45W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	3077lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø 1m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options
Energy class
Net lamp weight

integrated driver box with 1 x driver Superslim
60W Dali2/Push Dali (220/240V) | RAL 9005 black |
RAL 9016 white | shipped assembled
lumen output, finish
D
4 kg

Codes

BZRCD410G15NBO
BZRCD410G15NNE
BZRCD410G15NOR

Structure

white
black
gold

PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

Certificazioni



ZIRKOL CEILING 0,8-1-1,5 M

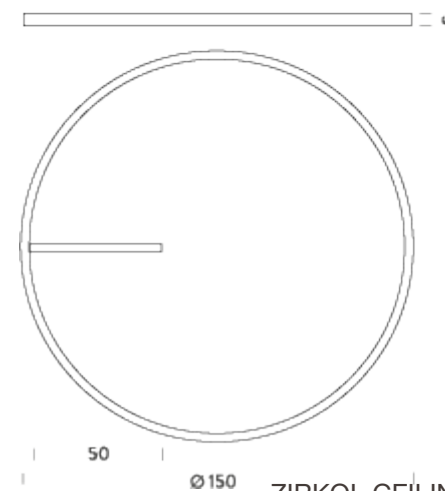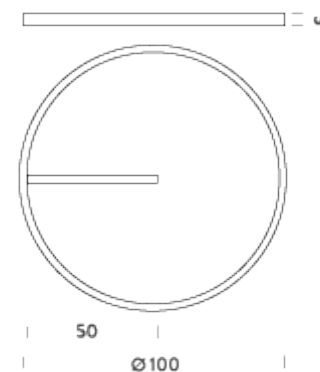

Ø 1,5M | 2700K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
60W
Diffused
DALI
24V
2700K
3923lm
63lm/W
SDCM<3
90
40
Ø 1,5m x 5cm
aluminium
0°C / +35°C
25°C
integrated driver box with 1 x driver Superslim
60W Dali2/Push Dali (220/240V) | RAL 9005 black |
RAL 9016 white | shipped assembled
lumen output, finish
E
5,4 kg

Customization options
Energy class
Net lamp weight

Codes

BZRCD415G15DBO
BZRCD415G15DNE
BZRCD415G15DOR

Structure

white
black
gold

PACKAGE




Package 01

Dimension: 165x165x12 cm / Gross weight: 8,9 kg

Certificazioni



ZIRKOL CEILING 0,8-1,5 M

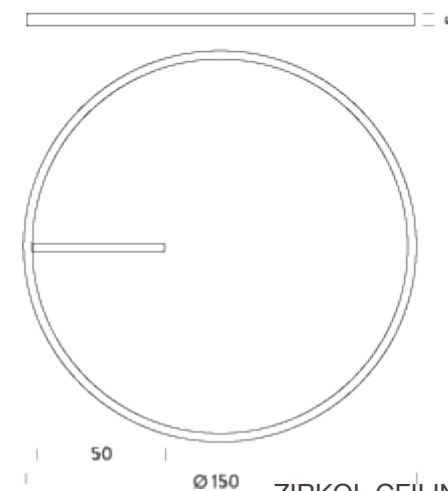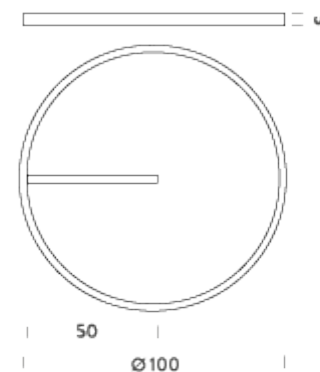

Ø 1,5M | 3000K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
60W
Diffused
DALI
24V
3000K
4154lm
69lm/W
SDCM<3
90
40
Ø 1,5m x 5cm
aluminium
0°C / +35°C
25°C
integrated driver box with 1 x driver Superslim
60W Dali2/Push Dali (220/240V) | RAL 9005 black |
RAL 9016 white | shipped assembled
lumen output, finish
E
5,4 kg

Customization options
Energy class
Net lamp weight

Codes

BZRCD415G15WBO
BZRCD415G15WNE
BZRCD415G15WOR

Structure

white
black
gold

PACKAGE




Package 01

Dimension: 165x165x12 cm / Gross weight: 8,9 kg

Certificazioni



ZIRKOL CEILING 0,8-1,5 M

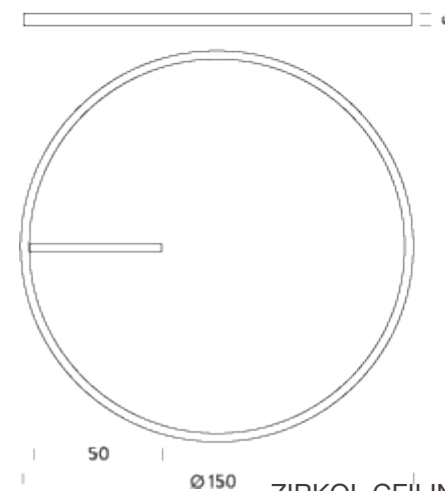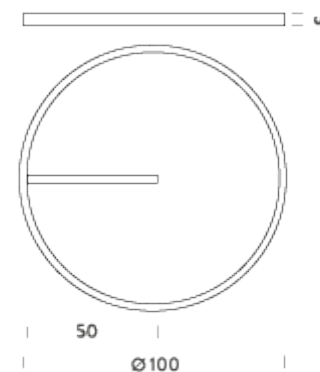

Ø 1,5M | 4000K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
60W
Diffused
DALI
24V
4000K
4616lm
77lm/W
SDCM<3
90
40
Ø 1,5m x 5cm
aluminium
0°C / +35°C
25°C
integrated driver box with 1 x driver Superslim
60W Dali2/Push Dali (220/240V) | RAL 9005 black |
RAL 9016 white | shipped assembled
lumen output, finish
D
5,4 kg

Customization options
Energy class
Net lamp weight

Codes

BZRCD415G15NBO
BZRCD415G15NNE
BZRCD415G15NOR

Structure

white
black
gold

PACKAGE

Package 01

Dimension: 165x165x12 cm / Gross weight: 8,9 kg

Certificazioni



ZIRKOL CEILING 0,8-1,5 M

