


ZIRKOL GAP

Die aus einem Teil der Zirkol Circle Leuchte entstandene Zirkol Gap ist eine neue Leuchte der Kollektion, die sich für die allgemeine und dekorative Beleuchtung eignet. Das Gehäuse aus eloxiertem Aluminium und der opale Diffusor sorgen für eine homogene Lichtabstrahlung nach unten und oben. Zirkol Gap ist in den Farben Schwarz, Weiß und Mattgold und in den LED-Farbtemperaturen 2700K, 3000K und 4000K erhältlich. Inklusive Treiber und DALI-Schnittstelle.

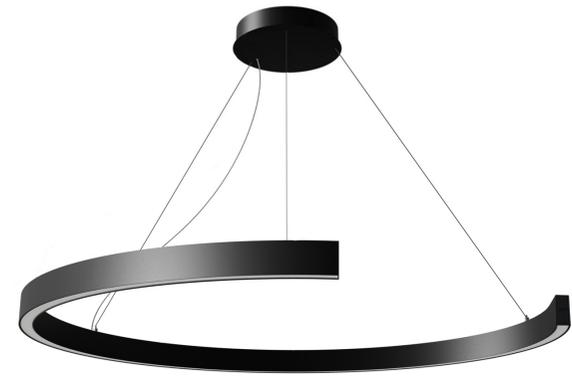

Ø0,85M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	1500lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1608G15DBO
BZRG1608G15DNE
BZRG1608G15DOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



Ø0,85M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	1650lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1608G15WBO
BZRG1608G15WNE
BZRG1608G15WOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



Ø0,85M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	1770lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1608G15NBO
BZRG1608G15NNE
BZRG1608G15NOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



Ø0,85M | UP-DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	3000lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1708G15DBO
BZRG1708G15DNE
BZRG1708G15DOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



Ø0,85M | UP-DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	3300lm
Initial luminaire efficacy	73lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1708G15WBO
BZRG1708G15WNE
BZRG1708G15WOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



Ø0,85M | UP-DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	3540lm
Initial luminaire efficacy	79lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1708G15NBO
BZRG1708G15NNE
BZRG1708G15NOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



Ø1M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	1962lm
Initial luminaire efficacy	75lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1610G15DBO
BZRG1610G15DNE
BZRG1610G15DOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



Ø1M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	2077lm
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1610G15WBO
BZRG1610G15WNE
BZRG1610G15WOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



Ø1M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	2308lm
Initial luminaire efficacy	89lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

3 kg

Codes

BZRG1610G15NBO
BZRG1610G15NNE
BZRG1610G15NOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



Ø1M | UP-DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	68W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	3923lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

4 kg

Codes

BZRG1710G15DBO
BZRG1710G15DNE
BZRG1710G15DOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

Certificazioni



Ø1M | UP-DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	68W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	4154lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

4 kg

Codes

BZRG1710G15WBO
BZRG1710G15WNE
BZRG1710G15WOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

Certificazioni



Ø1M | UP-DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	68W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	4615lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems

Net lamp weight

4 kg

Codes

BZRG1710G15NBO
BZRG1710G15NNE
BZRG1710G15NOR

Structure



white
black
gold

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

Certificazioni



Ø1,5M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	50W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	2942lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø150x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

external electrical cable | light configurations, separate light control, control systems



Codes

BZRG1615G15DBO
BZRG1615G15DNE
BZRG1615G15DOR

Structure

white
black
gold

Certificazioni



Ø1,5M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	50W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	3115lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø150x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems



Codes

BZRG1615G15WBO
BZRG1615G15WNE
BZRG1615G15WOR

Structure

white
black
gold

Certificazioni



Ø1,5M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	50W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	3462lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø150x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

external electrical cable | light configurations, separate light control, control systems



Codes

BZRG1615G15NBO
BZRG1615G15NNE
BZRG1615G15NOR

Structure

white
black
gold

Certificazioni



Ø1,5M | UP-DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	100W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	5885lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø150x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: round canopy with 1 x driver 100W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

external electrical cable | light configurations, separate light control, control systems



Codes

BZRG1715G15DBO
BZRG1715G15DNE
BZRG1715G15DOR

Structure

white
black
gold

Certificazioni



Ø1,5M | UP-DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	100W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	6231lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø150x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options

included: round canopy with 1 x driver 100W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

external electrical cable | light configurations, separate light control, control systems



Codes

BZRG1715G15WBO
BZRG1715G15WNE
BZRG1715G15WOR

Structure

white
black
gold

Certificazioni



Ø1,5M | UP-DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	100W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	6924lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	Ø150x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options

included: round canopy with 1 x driver 100W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) | ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

external electrical cable | light configurations, separate light control, control systems

Codes

BZRG1715G15NBO
BZRG1715G15NNE
BZRG1715G15NOR

Structure

white
black
gold

Certificazioni

