

# CAPRI PRO

Capri Pro is the latest spot of the collection designed for indoor accent lighting. CRI 97 for high light quality in museum applications. Accessory filters to suit all lighting requirements. It can be rotated 90° vertically and 355° horizontally. The excellent heat dissipation structure and integrated driver are perfectly combined. The integrated design makes for a more compact and minimalist appearance. The adjustable beam angle fulfils all lighting requirements.



## DALI | 2700K

### LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	DALI
Tension	220/240V
Color temperature	2700K
Luminous flux	1490lm
Initial luminaire efficacy	65lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	20
Dimensions	ø7,3x23,5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V

Customization options

Accessories

Net lamp weight

### Codes

MCAP5701971DNE

MCAP5701971DBO

4000K CCT

Filters, Honeycomb, oval, sand glass | Snoot - Barndoor, Snoot, Barndoor

1 kg

### Structure

black

white

### PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


### Certificazioni



CAPRI PRO DALI

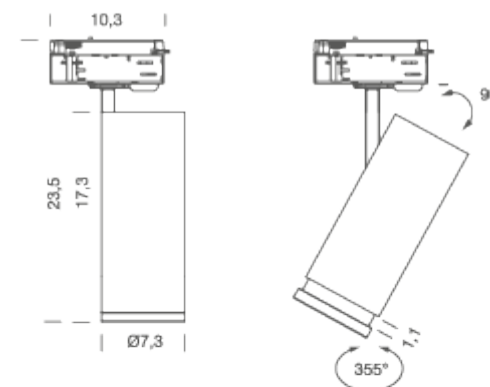

CAPRI PRO DOB

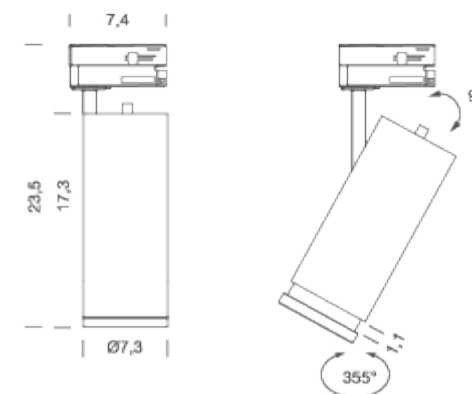

# DALI | 3000K

## LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	DALI
Tension	220/240V
Color temperature	3000K
Luminous flux	1570lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	20
Dimensions	ø7,3x23,5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V

## Accessories

Filters, Honeycomb, oval, sand glass | Snoot - Barndoor, Snoot, Barndoor

## Net lamp weight

1 kg

## Codes

MCAP5701971WNE  
MCAP5701971WBO

## Structure

black  
white

## PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


## Certificazioni



CAPRI PRO DALI

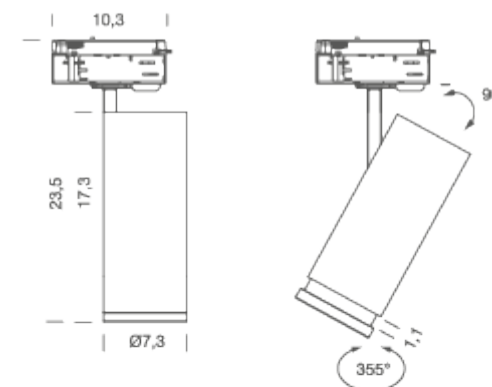

CAPRI PRO DOB

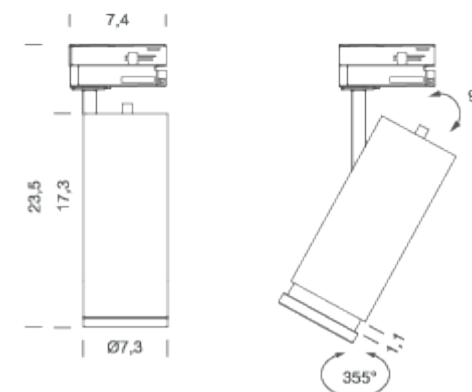

## DIM ON BOARD | 2700K

### LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	DIM ON BOARD
Tension	220/240V
Color temperature	2700K
Luminous flux	1490lm
Initial luminaire efficacy	65lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	20
Dimensions	ø7,3x23,5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V

### Accessories

Filters, Honeycomb, oval, sand glass | Snoot - Barndoor, Snoot, Barndoor

### Net lamp weight

1 kg

### Codes

MCAP5901971DNE  
MCAP5901971DBO

### Structure

black  
white

### PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


### Certificazioni



CAPRI PRO DALI

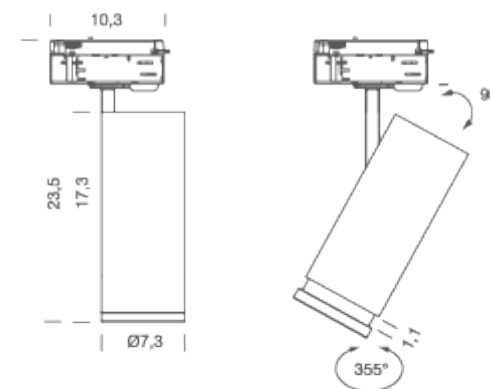

CAPRI PRO DOB

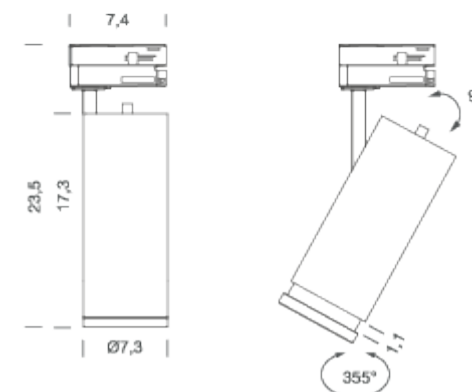

## DIM ON BOARD | 3000K

### LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	DIM ON BOARD
Tension	220/240V
Color temperature	3000K
Luminous flux	1570lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	20
Dimensions	ø7,3x23,5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V

### Accessories

Filters, Honeycomb, oval, sand glass | Snoot - Barndoor, Snoot, Barndoor

### Net lamp weight

1 kg

### Codes

MCAP5901971WNE  
MCAP5901971WBO

### Structure

black  
white

### PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

### Certificazioni



CAPRI PRO DALI

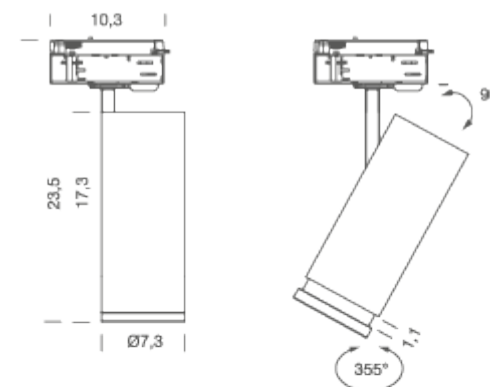

CAPRI PRO DOB

