

MINIFLUX LINEA WALL-C OPAL

Miniflux Linea Wall-C is a wall-mounted LED system for indoor. High-emission LED strip (24V DC) installed on a black aluminium profile. CRI>97. Opal polycarbonate, adjustable light source. Available in two color temperatures.



LAMPING

Source	LED strip
Total power	15W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	2700K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	106xØ2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver not included 2 x clip included
Customization options	tube length indirect light direction external electrical cable
Net lamp weight	0,4 kg

Codes

BMCL4010G26DAN
BMCL4010G26DAR
BMCL4010G26DAO

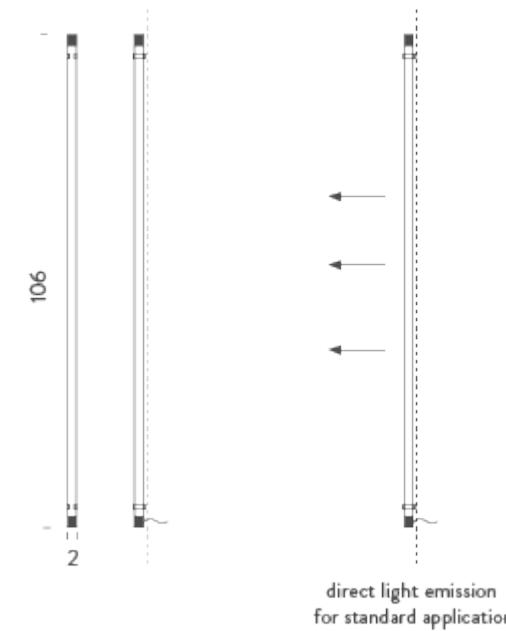
PACKAGE

Package 01

Structure

black
red
gold

Dimension: 120x8x4 cm / Gross weight: 0,4 kg

Certificazioni

LAMPING

Source	LED strip
Total power	15W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	3000K
Luminous flux	905lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	106xØ2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver not included 2 x clip included
Customization options	tube length indirect light direction external electrical cable
Net lamp weight	0,4 kg

Codes

BMCL4010G26WAN
BMCL4010G26WAR
BMCL4010G26WAO

PACKAGE

Package 01

Structure

black
red
gold

Dimension: 120x8x4 cm / Gross weight: 0,4 kg

Certificazioni