

# SLACKLINE REGULAR

SLACKLINE family is composed of a wide selection of aluminium profiles with different fixing types but with the same LED source: Slackline Trim, Slackline Regular and Slackline Micro. These characteristics make the Slackline installation very flexible in any ambience.

Minimal design and excellent light quality.

Slackline is also suitable for linear connection solutions (on request).

Depending on fixing types, the Slackline comes in various different standard lengths with CRI>94.



## RECESSED | 1M - 3000K

### LAMPING

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                             |
| Total power                     | 15W                                                                                                                                   |
| Emission                        | diffused                                                                                                                              |
| Switching                       | according to driver                                                                                                                   |
| Tension                         | 24VDC                                                                                                                                 |
| Color temperature               | 3000K                                                                                                                                 |
| Luminous flux                   | 860lm                                                                                                                                 |
| Initial luminaire efficacy      | 57lm/W                                                                                                                                |
| Initial chromaticity            | SDCM <3                                                                                                                               |
| Typ CRI                         | 97                                                                                                                                    |
| IP class                        | 40                                                                                                                                    |
| Dimensions                      | 5,14x1,35x100,5cm                                                                                                                     |
| Materials                       | anodized aluminum                                                                                                                     |
| Ambient temperature range       | - 20°C / 35°C                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                  |
| Notes                           | driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version |
| Customization options           | CCT 2700K, body length                                                                                                                |
| Energy class                    | F                                                                                                                                     |
| Accessories                     | Drivers 24VDC + DALI interface,                                                                                                       |
| Net lamp weight                 | 0,45 kg                                                                                                                               |

### Codes

BSLA2110G26WAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

### Certificazioni




SUSPENDED

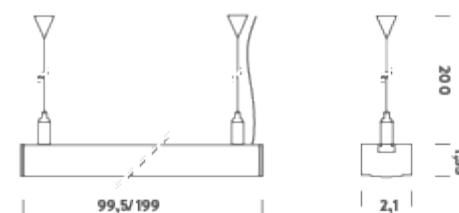


CEILING



RECESSED

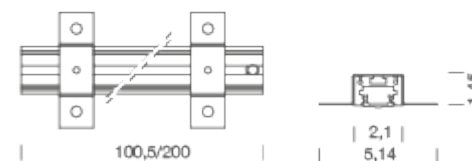

WALL MOUNTED



## RECESSED | 1M - 4000K

### LAMPING

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                             |
| Total power                     | 15W                                                                                                                                   |
| Emission                        | diffused                                                                                                                              |
| Switching                       | according to driver                                                                                                                   |
| Tension                         | 24VDC                                                                                                                                 |
| Color temperature               | 4000K                                                                                                                                 |
| Luminous flux                   | 890lm                                                                                                                                 |
| Initial luminaire efficacy      | 59lm/W                                                                                                                                |
| Initial chromaticity            | SDCM <3                                                                                                                               |
| Typ CRI                         | 94                                                                                                                                    |
| IP class                        | 40                                                                                                                                    |
| Dimensions                      | 5,14x1,35x100,5cm                                                                                                                     |
| Materials                       | anodized aluminum                                                                                                                     |
| Ambient temperature range       | - 20°C / 35°C                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                  |
| Notes                           | driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version |
| Customization options           | CCT 2700K, body length                                                                                                                |
| Energy class                    | E                                                                                                                                     |
| Accessories                     | Drivers 24VDC + DALI interface,                                                                                                       |
| Net lamp weight                 | 0,45 kg                                                                                                                               |

### Codes

BSLA2110G26NAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

### Certificazioni




SUSPENDED

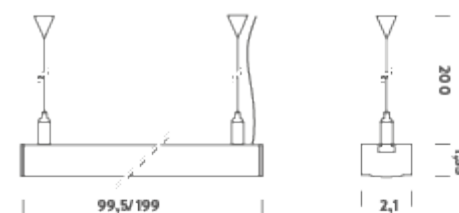


CEILING



RECESSED

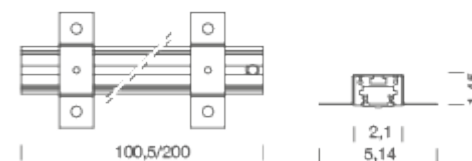

WALL MOUNTED



RECESSED | 2M - 3000K

LAMPING

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                             |
| Total power                     | 30W                                                                                                                                   |
| Emission                        | diffused                                                                                                                              |
| Switching                       | according to driver                                                                                                                   |
| Tension                         | 24VDC                                                                                                                                 |
| Color temperature               | 3000K                                                                                                                                 |
| Luminous flux                   | 1720lm                                                                                                                                |
| Initial luminaire efficacy      | 57lm/W                                                                                                                                |
| Initial chromaticity            | SDCM <3                                                                                                                               |
| Typ CRI                         | 97                                                                                                                                    |
| IP class                        | 40                                                                                                                                    |
| Dimensions                      | 5,14x1,35x200cm                                                                                                                       |
| Materials                       | anodized aluminum                                                                                                                     |
| Ambient temperature range       | - 20°C / 35°C                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                  |
| Notes                           | driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version |
| Customization options           | CCT 2700K, body length                                                                                                                |
| Energy class                    | F                                                                                                                                     |
| Accessories                     | Drivers 24VDC + DALI interface,                                                                                                       |
| Net lamp weight                 | 0,87 kg                                                                                                                               |

Codes

BSLA2120G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni




SUSPENDED

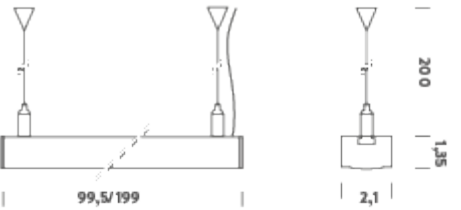

CEILING



RECESSED

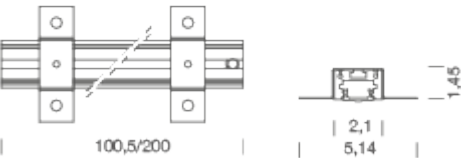

WALL MOUNTED



## RECESSED | 2M - 4000K

### LAMPING

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                             |
| Total power                     | 30W                                                                                                                                   |
| Emission                        | diffused                                                                                                                              |
| Switching                       | according driver                                                                                                                      |
| Tension                         | 24VDC                                                                                                                                 |
| Color temperature               | 4000K                                                                                                                                 |
| Luminous flux                   | 1780lm                                                                                                                                |
| Initial luminaire efficacy      | 59lm/W                                                                                                                                |
| Initial chromaticity            | SDCM <3                                                                                                                               |
| Typ CRI                         | 94                                                                                                                                    |
| IP class                        | 40                                                                                                                                    |
| Dimensions                      | 5,14x1,35x200cm                                                                                                                       |
| Materials                       | anodized aluminum                                                                                                                     |
| Ambient temperature range       | - 20°C / 35°C                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                  |
| Notes                           | driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version |
| Customization options           | CCT 2700K, body length                                                                                                                |
| Energy class                    | E                                                                                                                                     |
| Accessories                     | Drivers 24VDC + DALI interface,                                                                                                       |
| Net lamp weight                 | 0,87 kg                                                                                                                               |

### Codes

BSLA2120G26NAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

### Certificazioni




SUSPENDED

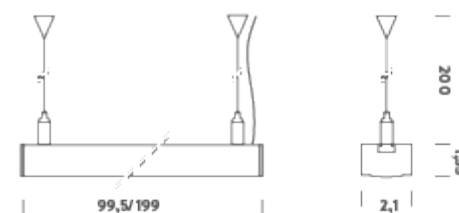


CEILING



RECESSED

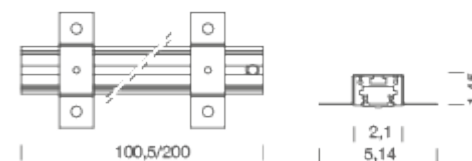

WALL MOUNTED



## PENDANT | 1M - 3000K

### LAMPING

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                             |
| Total power                     | 15W                                                                                                                                   |
| Emission                        | diffused                                                                                                                              |
| Switching                       | according to driver                                                                                                                   |
| Tension                         | 24VDC                                                                                                                                 |
| Color temperature               | 3000K                                                                                                                                 |
| Luminous flux                   | 860lm                                                                                                                                 |
| Initial luminaire efficacy      | 57lm/W                                                                                                                                |
| Initial chromaticity            | SDCM <3                                                                                                                               |
| Typ CRI                         | 97                                                                                                                                    |
| IP class                        | 40                                                                                                                                    |
| Dimensions                      | 2,1x1,35x99,5cm                                                                                                                       |
| Materials                       | anodized aluminum                                                                                                                     |
| Ambient temperature range       | - 20°C / 35°C                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                  |
| Notes                           | driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version |
| Customization options           | CCT 2700K, body length                                                                                                                |
| Energy class                    | F                                                                                                                                     |
| Accessories                     | Drivers 24VDC + DALI interface,                                                                                                       |
| Net lamp weight                 | 0,45 kg                                                                                                                               |

### Codes

BSLA0310G26WAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg


### Certificazioni




SUSPENDED

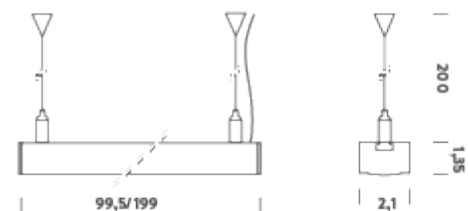

CEILING



RECESSED

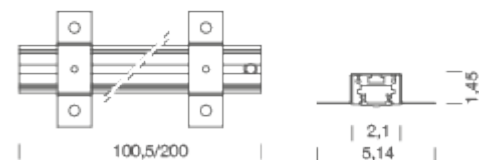

WALL MOUNTED



PENDANT | 1M - 4000K

LAMPING

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                             |
| Total power                     | 15W                                                                                                                                   |
| Emission                        | diffused                                                                                                                              |
| Switching                       | according to driver                                                                                                                   |
| Tension                         | 24VDC                                                                                                                                 |
| Color temperature               | 4000K                                                                                                                                 |
| Luminous flux                   | 890lm                                                                                                                                 |
| Initial luminaire efficacy      | 59lm/W                                                                                                                                |
| Initial chromaticity            | SDCM <3                                                                                                                               |
| Typ CRI                         | 94                                                                                                                                    |
| IP class                        | 40                                                                                                                                    |
| Dimensions                      | 2,1x1,35x99,5cm                                                                                                                       |
| Materials                       | anodized aluminum                                                                                                                     |
| Ambient temperature range       | - 20°C / 35°C                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                  |
| Notes                           | driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version |
| Customization options           | CCT 2700K, body length                                                                                                                |
| Energy class                    | E                                                                                                                                     |
| Accessories                     | Drivers 24VDC + DALI interface,                                                                                                       |
| Net lamp weight                 | 0,45 kg                                                                                                                               |

Codes

BSLA0310G26NAA


Structure

grey

PACKAGE

Package 01 Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni

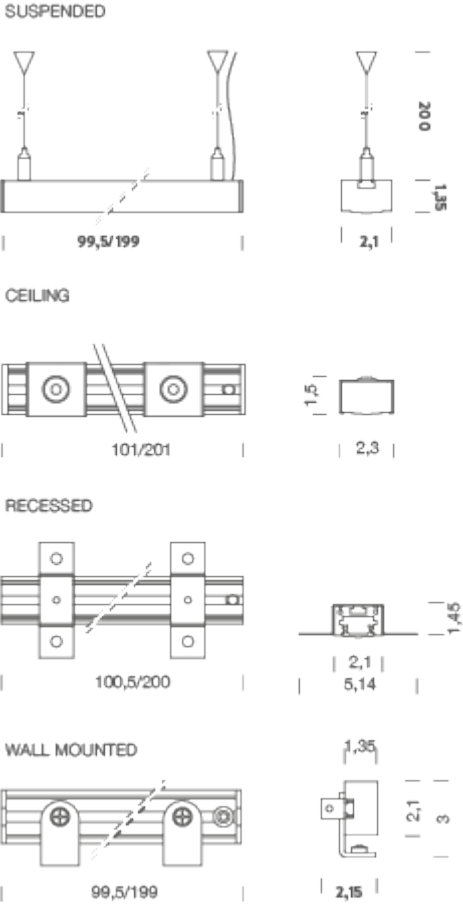

## PENDANT | 2M - 3000K

### LAMPING

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                             |
| Total power                     | 30W                                                                                                                                   |
| Emission                        | diffused                                                                                                                              |
| Switching                       | according to driver                                                                                                                   |
| Tension                         | 24VDC                                                                                                                                 |
| Color temperature               | 3000K                                                                                                                                 |
| Luminous flux                   | 1720lm                                                                                                                                |
| Initial luminaire efficacy      | 57lm/W                                                                                                                                |
| Initial chromaticity            | SDCM <3                                                                                                                               |
| Typ CRI                         | 97                                                                                                                                    |
| IP class                        | 40                                                                                                                                    |
| Dimensions                      | 2,1x1,35x199,5cm                                                                                                                      |
| Materials                       | anodized aluminum                                                                                                                     |
| Ambient temperature range       | - 20°C / 35°C                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                  |
| Notes                           | driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version |
| Customization options           | CCT 2700K, body length                                                                                                                |
| Energy class                    | F                                                                                                                                     |
| Accessories                     | Drivers 24VDC + DALI interface,                                                                                                       |
| Net lamp weight                 | 0,87 kg                                                                                                                               |

### Codes

BSLA0320G26WAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg


### Certificazioni




SUSPENDED

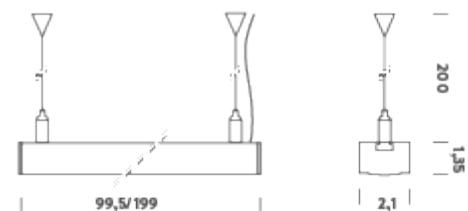

CEILING



RECESSED

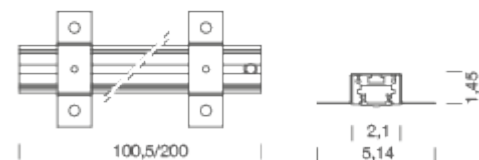

WALL MOUNTED



# PENDANT | 2M - 4000K

## LAMPING

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                             |
| Total power                     | 30W                                                                                                                                   |
| Emission                        | diffused                                                                                                                              |
| Switching                       | according do driver                                                                                                                   |
| Tension                         | 24VDC                                                                                                                                 |
| Color temperature               | 4000K                                                                                                                                 |
| Luminous flux                   | 1780lm                                                                                                                                |
| Initial luminaire efficacy      | 59lm/W                                                                                                                                |
| Initial chromaticity            | SDCM <3                                                                                                                               |
| Typ CRI                         | 94                                                                                                                                    |
| IP class                        | 40                                                                                                                                    |
| Dimensions                      | 2,1x1,35x199,5cm                                                                                                                      |
| Materials                       | anodized aluminum                                                                                                                     |
| Ambient temperature range       | - 20°C / 35°C                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                  |
| Notes                           | driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version |
| Customization options           | CCT 2700K, body length                                                                                                                |
| Energy class                    | E                                                                                                                                     |
| Accessories                     | Drivers 24VDC + DALI interface,                                                                                                       |
| Net lamp weight                 | 0,87 kg                                                                                                                               |

## Codes

BSLA0320G26NAA

## Structure

grey

## PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

## Certificazioni




SUSPENDED

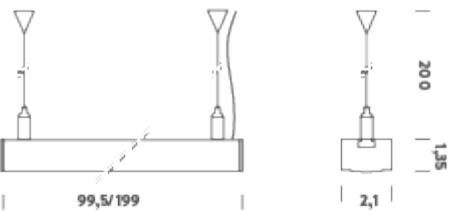


CEILING



RECESSED

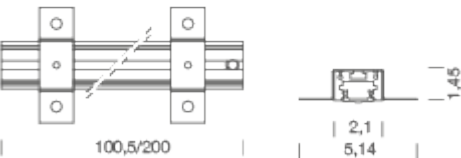

WALL MOUNTED



## CEILING | 1M - 3000K

### LAMPING

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                             |
| Total power                     | 15W                                                                                                                                   |
| Emission                        | diffused                                                                                                                              |
| Switching                       | according to driver                                                                                                                   |
| Tension                         | 24VDC                                                                                                                                 |
| Color temperature               | 3000K                                                                                                                                 |
| Luminous flux                   | 860lm                                                                                                                                 |
| Initial luminaire efficacy      | 57lm/W                                                                                                                                |
| Initial chromaticity            | SDCM <3                                                                                                                               |
| Typ CRI                         | 97                                                                                                                                    |
| IP class                        | 40                                                                                                                                    |
| Dimensions                      | 2,3x1,5x101cm                                                                                                                         |
| Materials                       | anodized aluminum                                                                                                                     |
| Ambient temperature range       | - 20°C / 35°C                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                  |
| Notes                           | driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version |
| Customization options           | CCT 2700K, body length                                                                                                                |
| Energy class                    | F                                                                                                                                     |
| Accessories                     | Drivers 24VDC + DALI interface,                                                                                                       |
| Net lamp weight                 | 0,45 kg                                                                                                                               |

### Codes

BSLA0410G26WAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg


### Certificazioni




SUSPENDED

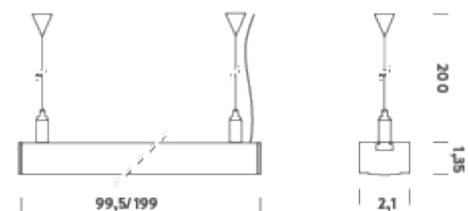

CEILING



RECESSED

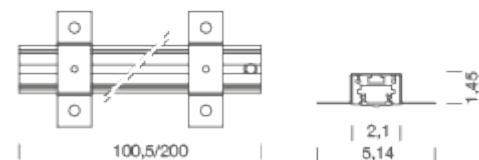

WALL MOUNTED



## CEILING | 1M - 4000K

### LAMPING

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                             |
| Total power                     | 15W                                                                                                                                   |
| Emission                        | diffused                                                                                                                              |
| Switching                       | according to driver                                                                                                                   |
| Tension                         | 24VDC                                                                                                                                 |
| Color temperature               | 4000K                                                                                                                                 |
| Luminous flux                   | 890lm                                                                                                                                 |
| Initial luminaire efficacy      | 59lm/W                                                                                                                                |
| Initial chromaticity            | SDCM <3                                                                                                                               |
| Typ CRI                         | 94                                                                                                                                    |
| IP class                        | 40                                                                                                                                    |
| Dimensions                      | 2,3x1,5x101cm                                                                                                                         |
| Materials                       | anodized aluminum                                                                                                                     |
| Ambient temperature range       | - 20°C / 35°C                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                  |
| Notes                           | driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version |
| Customization options           | CCT 2700K, body length                                                                                                                |
| Energy class                    | E                                                                                                                                     |
| Accessories                     | Drivers 24VDC + DALI interface,                                                                                                       |
| Net lamp weight                 | 0,45 kg                                                                                                                               |

### Codes

BSLA0410G26NAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

### Certificazioni




SUSPENDED

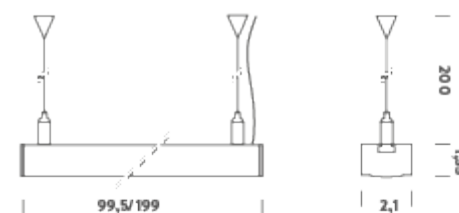


CEILING



RECESSED

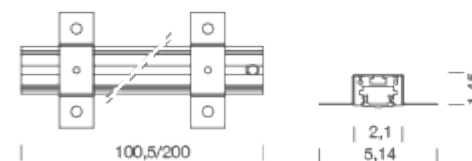

WALL MOUNTED



## CEILING | 2M - 3000K

### LAMPING

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                             |
| Total power                     | 30W                                                                                                                                   |
| Emission                        | diffused                                                                                                                              |
| Switching                       | according to driver                                                                                                                   |
| Tension                         | 24VDC                                                                                                                                 |
| Color temperature               | 3000K                                                                                                                                 |
| Luminous flux                   | 1720lm                                                                                                                                |
| Initial luminaire efficacy      | 57lm/W                                                                                                                                |
| Initial chromaticity            | SDCM <3                                                                                                                               |
| Typ CRI                         | 97                                                                                                                                    |
| IP class                        | 40                                                                                                                                    |
| Dimensions                      | 2,3x1,5x201cm                                                                                                                         |
| Materials                       | anodized aluminum                                                                                                                     |
| Ambient temperature range       | - 20°C / 35°C                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                  |
| Notes                           | driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version |
| Customization options           | CCT 2700K, body length                                                                                                                |
| Energy class                    | F                                                                                                                                     |
| Accessories                     | Drivers 24VDC + DALI interface,                                                                                                       |
| Net lamp weight                 | 0,87 kg                                                                                                                               |

### Codes

BSLA0420G26WAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg


### Certificazioni




SUSPENDED

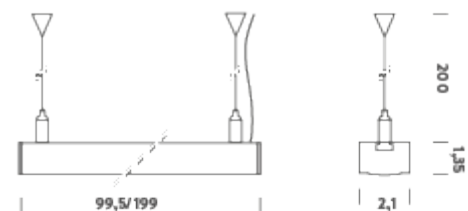

CEILING



RECESSED

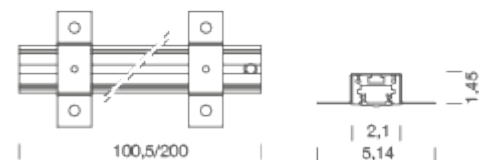

WALL MOUNTED



## CEILING | 2M - 4000K

### LAMPING

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                             |
| Total power                     | 30W                                                                                                                                   |
| Emission                        | diffused                                                                                                                              |
| Switching                       | according to driver                                                                                                                   |
| Tension                         | 24VDC                                                                                                                                 |
| Color temperature               | 4000K                                                                                                                                 |
| Luminous flux                   | 1780lm                                                                                                                                |
| Initial luminaire efficacy      | 59lm/W                                                                                                                                |
| Initial chromaticity            | SDCM <3                                                                                                                               |
| Typ CRI                         | 94                                                                                                                                    |
| IP class                        | 40                                                                                                                                    |
| Dimensions                      | 2,3x1,5x201cm                                                                                                                         |
| Materials                       | anodized aluminum                                                                                                                     |
| Ambient temperature range       | - 20°C / 35°C                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                  |
| Notes                           | driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version |
| Customization options           | CCT 2700K, body length                                                                                                                |
| Energy class                    | E                                                                                                                                     |
| Accessories                     | Drivers 24VDC + DALI interface,                                                                                                       |
| Net lamp weight                 | 0,87 kg                                                                                                                               |

### Codes

BSLA0420G26NAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg


### Certificazioni




SUSPENDED

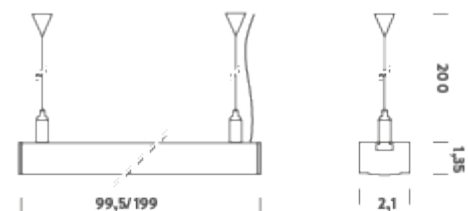

CEILING



RECESSED

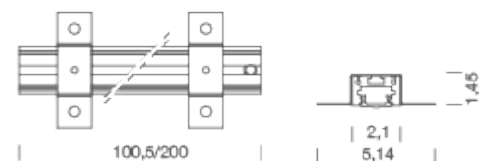

WALL MOUNTED



## WALL | 1M - 3000K

### LAMPING

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                             |
| Total power                     | 15W                                                                                                                                   |
| Emission                        | diffused                                                                                                                              |
| Switching                       | according to driver                                                                                                                   |
| Tension                         | 24VDC                                                                                                                                 |
| Color temperature               | 3000K                                                                                                                                 |
| Luminous flux                   | 860lm                                                                                                                                 |
| Initial luminaire efficacy      | 57lm/W                                                                                                                                |
| Initial chromaticity            | SDCM <3                                                                                                                               |
| Typ CRI                         | 97                                                                                                                                    |
| IP class                        | 40                                                                                                                                    |
| Dimensions                      | 2,25x2,15x99,5cm                                                                                                                      |
| Materials                       | anodized aluminum                                                                                                                     |
| Ambient temperature range       | - 20°C / 35°C                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                  |
| Notes                           | driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version |
| Customization options           | CCT 2700K, body length                                                                                                                |
| Energy class                    | F                                                                                                                                     |
| Accessories                     | Drivers 24VDC + DALI interface,                                                                                                       |
| Net lamp weight                 | 0,45 kg                                                                                                                               |

### Codes

BSLA4010G26WAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg


### Certificazioni




#### SUSPENDED

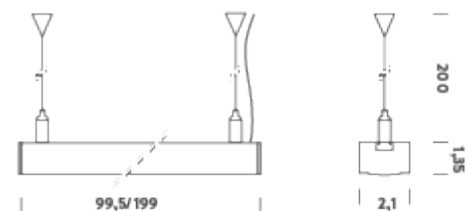

#### CEILING



#### RECESSED

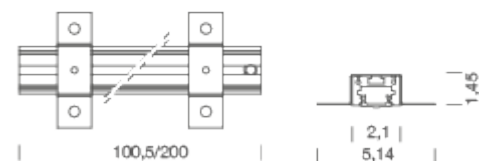

#### WALL MOUNTED



## WALL | 1M - 4000K

### LAMPING

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                             |
| Total power                     | 15W                                                                                                                                   |
| Emission                        | diffused                                                                                                                              |
| Switching                       | according to driver                                                                                                                   |
| Tension                         | 24VDC                                                                                                                                 |
| Color temperature               | 4000K                                                                                                                                 |
| Luminous flux                   | 890lm                                                                                                                                 |
| Initial luminaire efficacy      | 59lm/W                                                                                                                                |
| Initial chromaticity            | SDCM <3                                                                                                                               |
| Typ CRI                         | 94                                                                                                                                    |
| IP class                        | 40                                                                                                                                    |
| Dimensions                      | 2,25x2,15x99,5cm                                                                                                                      |
| Materials                       | anodized aluminum                                                                                                                     |
| Ambient temperature range       | - 20°C / 35°C                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                  |
| Notes                           | driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version |
| Customization options           | CCT 2700K, body length                                                                                                                |
| Energy class                    | E                                                                                                                                     |
| Accessories                     | Drivers 24VDC + DALI interface,                                                                                                       |
| Net lamp weight                 | 0,45 kg                                                                                                                               |

### Codes

BSLA4010G26NAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg


### Certificazioni




SUSPENDED

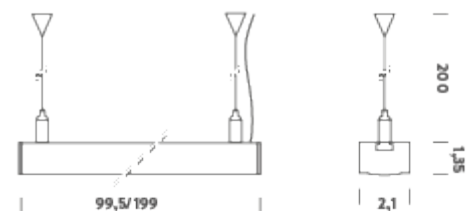

CEILING



RECESSED

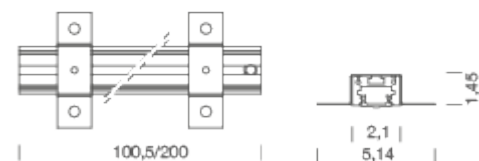

WALL MOUNTED



## WALL | 2M - 3000K

### LAMPING

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                             |
| Total power                     | 30W                                                                                                                                   |
| Emission                        | diffused                                                                                                                              |
| Switching                       | according to driver                                                                                                                   |
| Tension                         | 24VDC                                                                                                                                 |
| Color temperature               | 3000K                                                                                                                                 |
| Luminous flux                   | 1720lm                                                                                                                                |
| Initial luminaire efficacy      | 57lm/W                                                                                                                                |
| Initial chromaticity            | SDCM <3                                                                                                                               |
| Typ CRI                         | 97                                                                                                                                    |
| IP class                        | 40                                                                                                                                    |
| Dimensions                      | 2,25x2,15x199cm                                                                                                                       |
| Materials                       | anodized aluminum                                                                                                                     |
| Ambient temperature range       | - 20°C / 35°C                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                  |
| Notes                           | driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version |
| Customization options           | CCT 2700K, body length                                                                                                                |
| Energy class                    | F                                                                                                                                     |
| Accessories                     | Drivers 24VDC + DALI interface,                                                                                                       |
| Net lamp weight                 | 0,87 kg                                                                                                                               |

### Codes

BSLA4020G26WAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg


### Certificazioni




SUSPENDED

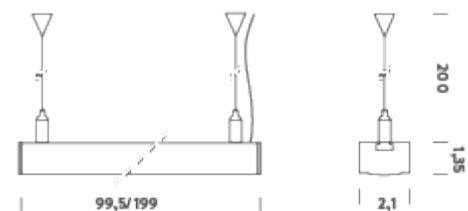

CEILING



RECESSED

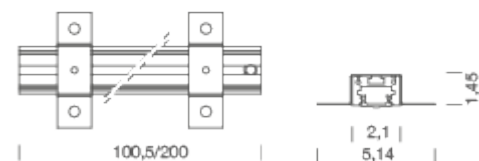

WALL MOUNTED



## WALL | 2M - 4000K

### LAMPING

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                             |
| Total power                     | 30W                                                                                                                                   |
| Emission                        | diffused                                                                                                                              |
| Switching                       | according to driver                                                                                                                   |
| Tension                         | 24VDC                                                                                                                                 |
| Color temperature               | 4000K                                                                                                                                 |
| Luminous flux                   | 1780lm                                                                                                                                |
| Initial luminaire efficacy      | 59lm/W                                                                                                                                |
| Initial chromaticity            | SDCM <3                                                                                                                               |
| Typ CRI                         | 94                                                                                                                                    |
| IP class                        | 40                                                                                                                                    |
| Dimensions                      | 2,25x2,15x199cm                                                                                                                       |
| Materials                       | anodized aluminum                                                                                                                     |
| Ambient temperature range       | - 20°C / 35°C                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                  |
| Notes                           | driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version |
| Customization options           | CCT 2700K, body length                                                                                                                |
| Energy class                    | E                                                                                                                                     |
| Accessories                     | Drivers 24VDC + DALI interface,                                                                                                       |
| Net lamp weight                 | 0,87 kg                                                                                                                               |

### Codes

BSLA4020G26NAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg


### Certificazioni




SUSPENDED

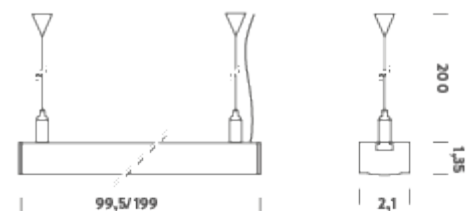

CEILING



RECESSED

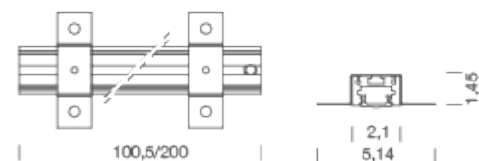

WALL MOUNTED

