


TWIG

An essential and clean design that interacts discreetly with the space. A thin line that ends with a point of light. It illuminates the vegetation or paths, almost disappearing into the environment in which it is installed.

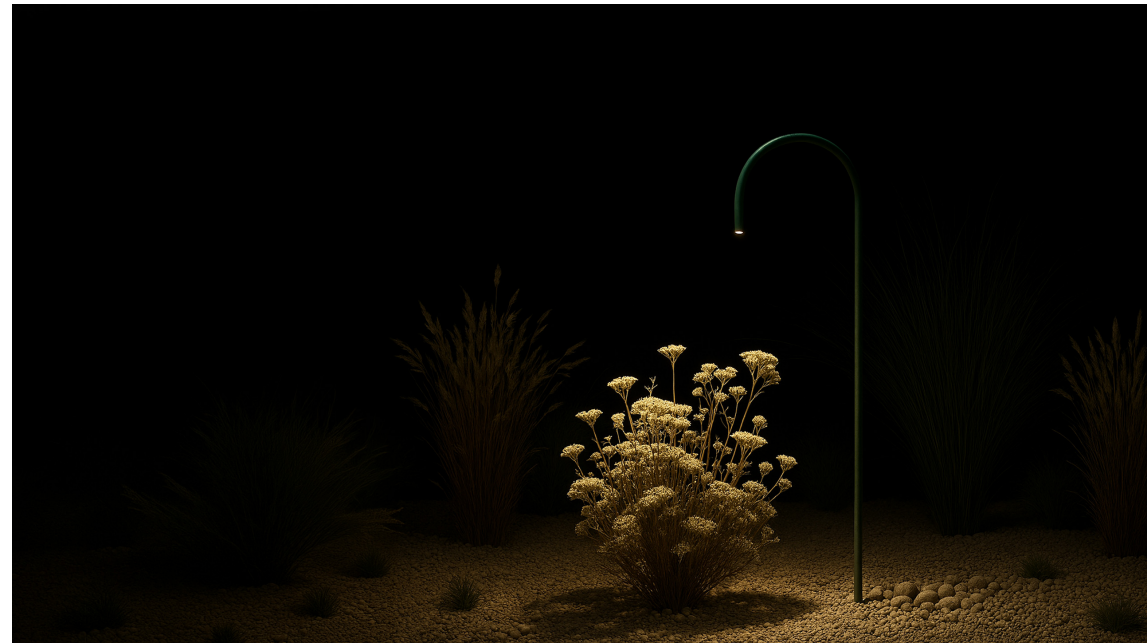

2700K | 650MM

LAMPING

Source	LED
Total power	1W
Emission	symmetric 36°
Switching	according to driver
Tension	max 350mA
Color temperature	2700K
Luminous flux	96lm
Initial luminaire efficacy	96lm/W
Typ CRI	>90
IP class	65
Dimensions	215x650mm
Materials	aluminium / brass
Accessories	Peg, Peg About outdoors

Codes



TWD000111DANE
TWD000111DAVE

Certificazioni

UK
CA

Structure

ink black
pine green

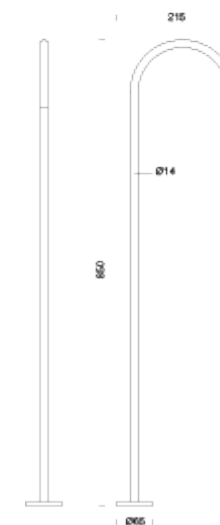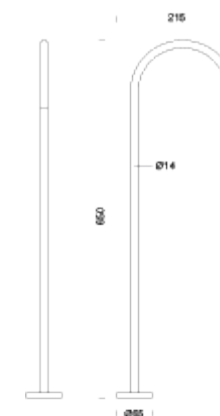

2700K | 850MM

LAMPING

Source	LED
Total power	1W
Emission	symmetric 36°
Switching	according to driver
Tension	max 350mA
Color temperature	2700K
Luminous flux	96lm
Typ CRI	>90
IP class	65
Dimensions	215x850mm
Materials	aluminium / brass
Accessories	Peg, Peg About outdoors

Codes



TWD000111DBNE
TWD000111DBVE

Certificazioni

UK
CA

Structure

ink black
pine green

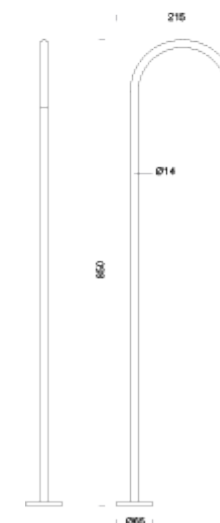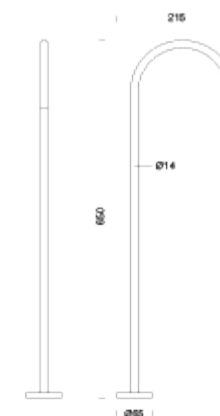

3000K | 650MM

LAMPING

Source	LED
Total power	1W
Emission	symmetric 36°
Switching	accordin to driver
Tension	max 350mA
Color temperature	3000K
Luminous flux	96lm
Typ CRI	>90
IP class	65
Dimensions	215x850mm
Materials	aluminium / brass
Accessories	Peg, Peg About outdoors

Codes


TWD000111WANE
TWD000111WAVE

Structure

ink black
pine green

Certificazioni

UK
CA

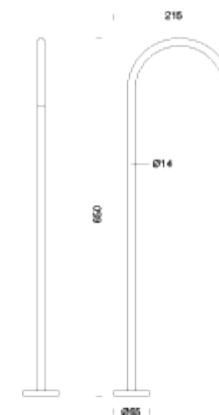

3000K | 850MM

LAMPING

Source	LED
Total power	1W
Emission	symmetric 36°
Switching	according to driver
Tension	max 350mA
Color temperature	3000K
Luminous flux	96lm
Typ CRI	>90
IP class	65
Dimensions	215x850mm
Materials	aluminium / brass
Accessories	Peg, Peg About outdoors

Codes

TWD000111WBNE
TWD000111WBVE

Structure

ink black
pine green

Certificazioni

UK
CA

