

# ZIRKOL SPOT

The ZIRKOL family represents the optimal balance between design and lighting, making it essential in the world of architecture. Each model is available in different sizes and finishes. All ZIRKOL shapes are made from the same aluminum profile to unify design and aesthetic. It is suitable for any kind of application, both in residential and public spaces. Available with downlight emission and LED orientable SPOT.



## 1M | 2700K - DALI

### LAMPING

Source	strip LED + spot
Total power	60W
Emission	direct downlight
Switching	DALI
Tension	110/240V
Color temperature	2700K
Luminous flux	3955lm
Typ CRI	90
IP class	40
Dimensions	ø100x5cm
Materials	aluminium
Notes	

included: round canopy with 1 driver 75W  
(110/240V) | 1x dimmer DALI | 1 electrical cable 4m  
| 3x adjustable spots up to 90° | 3x adjustable  
metal cables (length from 3m to 0,5m) ceiling  
attachment included | RAL 9005 black | RAL 9016  
white | 396lm for single spot | Shipped assembled


### Codes

BZRCF610G15DBO  
BZRCF610G15DNE  
BZRCF610G15DOR

### Structure

white  
black  
gold

### Certificazioni

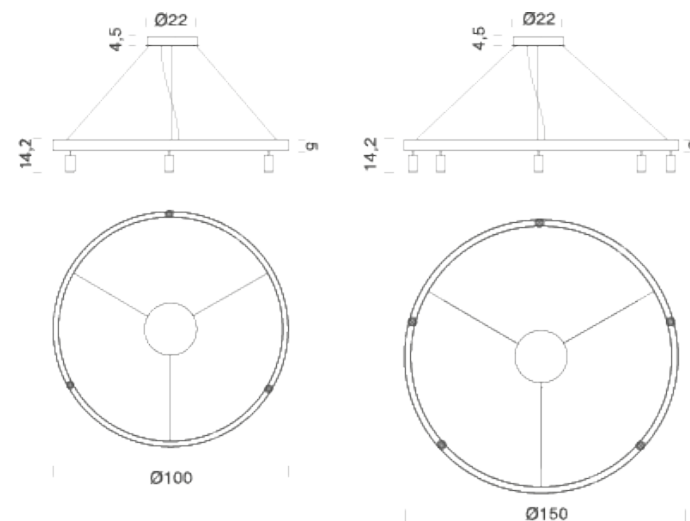

## 1M | 3000K - DALI

### LAMPING

Source	strip LED + spot
Total power	60W
Emission	direct downlight
Switching	DALI
Tension	110/240V
Color temperature	3000K
Luminous flux	4393lm
Typ CRI	90
IP class	40
Dimensions	ø100x5cm
Materials	aluminium
Notes	

included: round canopy with 1 driver 75W  
(110/240V) | 1x dimmer DALI | 1 electrical cable 4m  
| 3x adjustable spots up to 90° | 3x adjustable  
metal cables (length from 3m to 0,5m) ceiling  
attachment included | RAL 9005 black | RAL 9016  
white | 396lm for single spot | Shipped assembled


### Codes

BZRCF610G15WBO  
BZRCF610G15WNE  
BZRCF610G15WOR

### Structure

white  
black  
gold

### Certificazioni

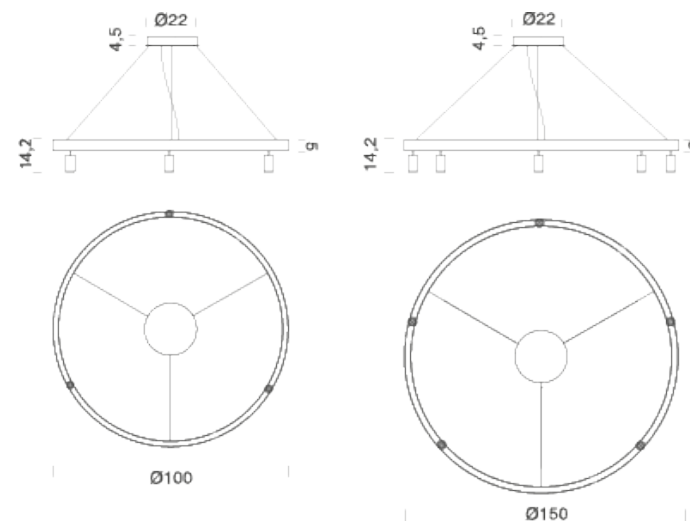

## 1,5M | 2700K - DALI

### LAMPING

Source	strip LED + spot
Total power	93W
Emission	direct downlight
Switching	DALI
Tension	110/240V
Color temperature	2700K
Luminous flux	5515lm
Typ CRI	90
IP class	40
Dimensions	ø150x5cm
Materials	aluminium
Notes	

included: round canopy with 1 driver 100W  
(110/240V) | 1x dimmer DALI | 1 electrical cable 4m  
| 5x adjustable spots up to 90° | 3x adjustable  
metal cables (length from 3m to 0,5m) ceiling  
attachment included | RAL 9005 black | RAL 9016  
white | 396lm for single spot | Shipped assembled


### Codes

BZRCF615G15DBO  
BZRCF615G15DNE  
BZRCF615G15DOR

### Structure

white  
black  
gold

### Certificazioni

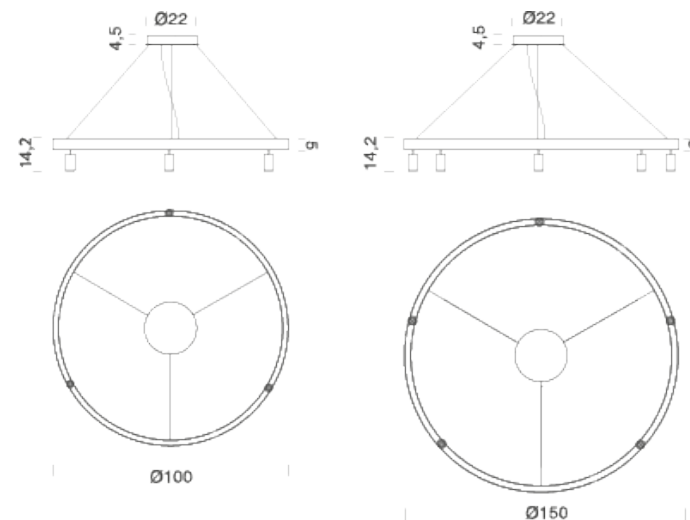

## 1,5M | 3000K - DALI

### LAMPING

Source	strip LED + spot
Total power	93W
Emission	direct downlight
Switching	DALI
Tension	110/240V
Color temperature	3000K
Luminous flux	6130lm
Typ CRI	90
IP class	40
Dimensions	ø150x5cm
Materials	aluminium
Notes	included: round canopy with 1 driver 100W (110/240V)   1x dimmer DALI   1 electrical cable 4m   5x adjustable spots up to 90°   3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included   RAL 9005 black   RAL 9016 white   396lm for single spot   Shipped assembled

### Codes

BZRCF615G15WBO  
BZRCF615G15WNE  
BZRCF615G15WOR

### Structure

white  
black  
gold

### Certificazioni

