

ZIRKOL TRACK OPAL

New addition to the collection, Zirkol Track Opal features a linear aluminium profile available in the finishes black and white. Opal screen for a homogeneous downlight emission. LED colour temperature of 3000K or 4000K. Driver on-board.



0,84M | 3000K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	ON/OFF
Tension	220/240V
Color temperature	3000K
Luminous flux	1680lm
Typ CRI	>90
IP class	40
Dimensions	84x3,5x10cm
Materials	aluminium
Notes	included: 1 x driver Ultraslim 60W (220/240V) integrated driver RAL 9005 black RAL 9016 white compatible with TRACK 3C/0-10V length
Customization options	


Codes

BZRL54084G15WBO
BZRL54084G15WNE

Structure

white
black

Certificazioni

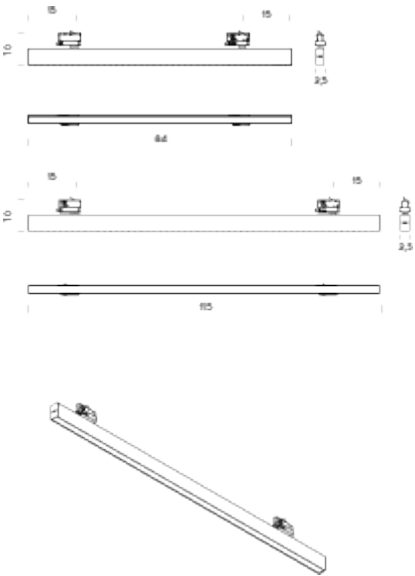

0,84M | 4000K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	ON/OFF
Tension	220/240V
Color temperature	4000K
Luminous flux	1764lm
Typ CRI	>90
IP class	40
Dimensions	84x3,5x10cm
Materials	aluminium
Notes	included: 1 x driver Ultraslim 60W (220/240V) integrated driver RAL 9005 black RAL 9016 white compatible with TRACK 3C/0-10V length
Customization options	


Codes

BZRL54084G15NBO
BZRL54084G15NNE

Structure

white
black

Certificazioni

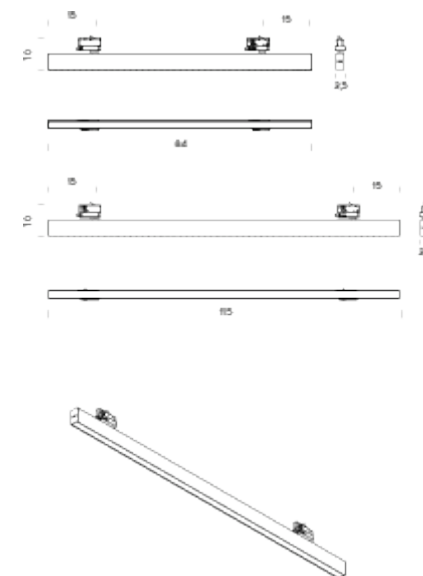

1,15M | 3000K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	ON/OFF
Tension	220/240V
Color temperature	3000K
Typ CRI	>90
IP class	40
Dimensions	115x3,5x5cm
Materials	aluminium
Notes	included: 1 x driver Ultraslim 60W (220/240V) integrated driver RAL 9005 black RAL 9016 white compatible with TRACK 3C/0-10V length
Customization options	


Codes

BZRL54115G15WBO
BZRL54115G15WNE

Structure

white
black

Certificazioni

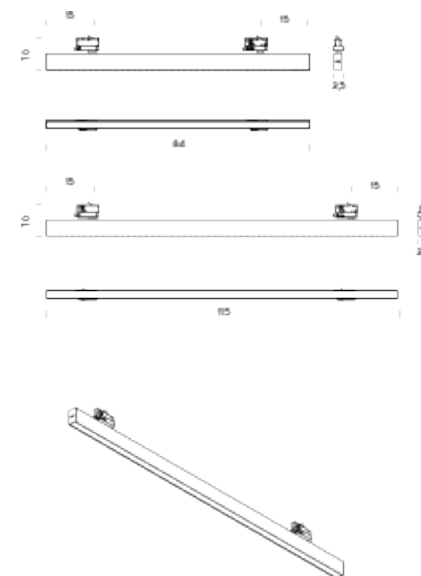

1,15M | 4000K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	ON/OFF
Tension	220/240V
Color temperature	4000K
Luminous flux	2415lm
Typ CRI	>90
IP class	40
Dimensions	115x3,5x10cm
Materials	aluminium
Notes	included: 1 x driver Ultraslim 60W (220/240V) integrated driver RAL 9005 black RAL 9016 white compatible with TRACK 3C/0-10V length
Customization options	

Codes

BZRL54115G15NBO
BZRL54115G15NNE

Structure

white
black

Certificazioni

