

MINIFLUX OPAL

MINIFLUX est un système à LED modulaire pour intérieurs/extérieurs adapté à un éclairage de corniche, décoratif et d'accentuation. Corps en profilé en aluminium sur lequel est positionné un ruban de LED 24V DC à haut rendement, Diffuseur en polycarbonate opale pour une diffusion homogène de la lumière. L'installation est réalisée à l'aide de clips en polycarbonate transparent qui permettent l'orientation du produit. Miniflux est disponible dans diverses longueurs et température de couleur. Alimentation non incluse.



1M | 3000K

LAMPING


Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	905lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
IP class	65
Dimensions	ø2x103cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,32 kg

Codes
BBOK0910G26WPO

PACKAGE

Package 01	Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg
------------	---

Certificazioni



1M | 4000K


LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1005lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
IP class	65
Dimensions	ø2x103cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,32 kg

Codes
BBOK0910G26NPO

PACKAGE
Package 01

Certificazioni

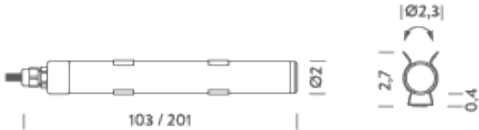

Structure
opal white

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

2M | 3000K

LAMPING


Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1800lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	97
IP class	65
Dimensions	ø2x201cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes
BBOK0920G26WPO

PACKAGE

Package 01 Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

Certificazioni

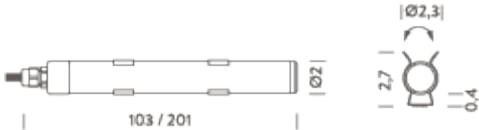

2M | 4000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2000lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM < 3
Typ CRI	94
IP class	65
Dimensions	ø2x201cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes

BBOK0920G26NPO


Structure

opal white

PACKAGE

Package 01	Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg
------------	--

Certificazioni

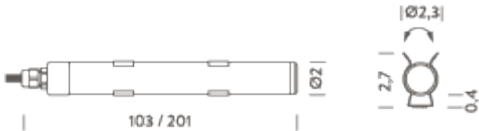

3M | 3000K

LAMPING


Source	LED strip
Total power	45W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2700lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM<3
Typ CRI	97
IP class	65
Dimensions	ø2x201cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes
BBOK0930G26WPO

PACKAGE

Package 01	Dimension: 310x8,5x4 cm / Gross weight: 0,72 kg
------------	---

Certificazioni

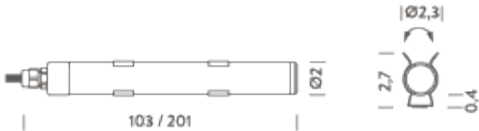

3M | 4000K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3000lm
Initial luminaire efficacy	67lm/m
Initial chromaticity	SDCM<3
Typ CRI	94
IP class	65
Dimensions	ø2x201cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes

BBOK0930G26NPO

Structure

opal white

PACKAGE

Package 01	Dimension: 310x8,5x4 cm / Gross weight: 0,72 kg
------------	---

Certificazioni

