

RIGA TRANSPARENT

RIGA est une famille de produits qui comprend une sélection de rubans LED flexibles pour extérieurs, particulièrement adaptée pour un éclairage décoratif. Riga est composé d'un ruban LED à 24V gainé dans un profilé en PVC blanc et encapsulé dans une résine polyuréthane transparente, extrêmement résistant aux agents atmosphériques et avec un excellent degré de stabilité si exposé aux rayons UV. Dans la version de la résine transparente la lumière est diffusé de face. Riga est disponible dans différentes longueurs.



1M | 2700K

LAMPING

Source	Flexible LED strip
Total power	9,6W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	1650lm
Initial luminaire efficacy	146lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x100cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,22 kg

Codes

MRIG0910035DRE

PACKAGE

Package 01

Certificazioni



Flexible LED strip

9,6W

direct 120°

according to driver

24VDC

2700K

1650lm

146lm/W

SDCM <3

85

68

1,5x0,7x100cm

resin + PVC

-20°C / +50°C

25°C

driver not included, cable length 2m

body length, CCT 2700K


Connectors kit IP68, | Drivers 24VDC + DALI interface,

0,22 kg


Structure

white

Dimension: 22x19x8 cm / Gross weight: 0,55 kg

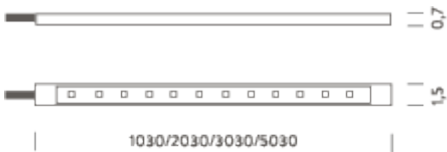

BRACKETS (included)



2M | 2700K

LAMPING

Source	Flexible LED strip
Total power	19,2W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	3300lm
Initial luminaire efficacy	146lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x200cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,48 kg

Codes

MRIG0920035DRE

PACKAGE

Package 01

Certificazioni



Flexible LED strip

19,2W

direct 120°

according to driver

24VDC

2700K

3300lm

146lm/W

SDCM <3

85

68

1,5x0,7x200cm

resin + PVC

-20°C / +50°C

25°C

driver not included, cable length 2m

body length, CCT 2700K


Connectors kit IP68, | Drivers 24VDC + DALI interface,

0,48 kg


Structure

white

Dimension: 22x19x4,5 cm / Gross weight: 0,81 kg

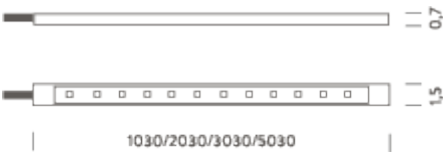

BRACKETS (included)



3M | 2700K

LAMPING

Source	Flexible LED strip
Total power	28,8W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	4950lm
Initial luminaire efficacy	146lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x300cm
Materials	esin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes

MRIG0930035DRE

PACKAGE

Package 01


Certificazioni




Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 0,84 kg

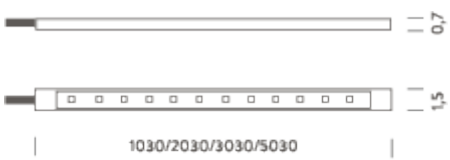

BRACKETS (included)



4M | 2700K

LAMPING

Source	Flexible LED strip
Total power	38,4W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	6600lm
Initial luminaire efficacy	146lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x400cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,96 kg

Codes

MRIG0940035DRE

Structure


white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,08 kg

Certificazioni

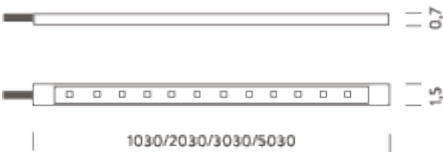

BRACKETS (included)



5M | 2700K

LAMPING

Source	Flexible LED strip
Total power	48W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	8250lm
Initial luminaire efficacy	146lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x500cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,2 kg


Codes

MRIG0950035DRE

PACKAGE

Package 01

Certificazioni

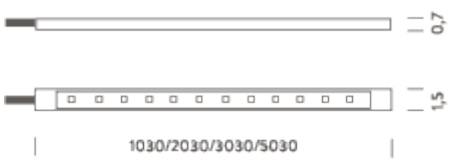

BRACKETS (included)

