

SALINA CEILING

Famille de spots downlight pour l'éclairage intérieur. La structure modulaire compose l'appareil avec plusieurs parties indépendantes. Les anneaux extérieurs avec plusieurs finitions sont faciles à assembler. Salina Ceiling est proposé avec différentes optiques accessoires, pour répondre à différents besoins d'éclairage.



15° | 2700K

LAMPING

Source	1x LED COB
Total power	12W
Emission	direct 15°
Switching	ON/OFF
Tension	220/250V
Color temperature	2700K
Luminous flux	640lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,2x15cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	ring not included, anti light loss system
Net lamp weight	0,48 kg

Codes

SALLN241
SALLW241

Structure


black
white

PACKAGE

Package 01

Dimension: 19x9x8 cm / Gross weight: 0,55 kg

Certificazioni

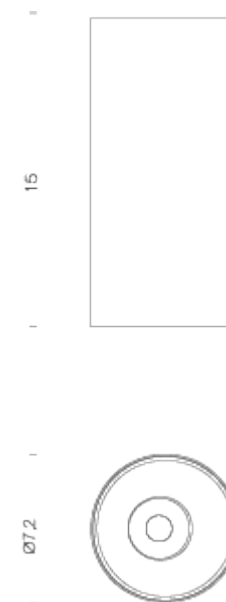

15° | 3000K

LAMPING

Source	1x LED COB
Total power	12W
Emission	direct 15°
Switching	ON/OFF
Tension	220/250V
Color temperature	3000K
Luminous flux	740lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,2x15cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	ring not included, anti light loss system
Net lamp weight	0,44 kg

Codes

SALLN243
SALLW243

Structure


black
white

PACKAGE

Package 01

Dimension: 19x9x8 cm / Gross weight: 0,55 kg

Certificazioni

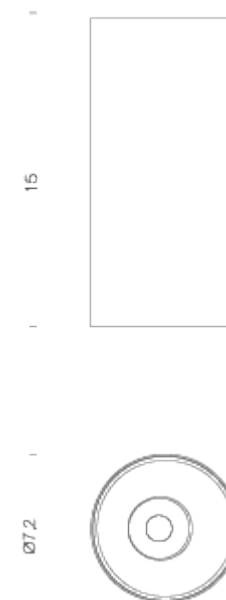

35° | 2700K

LAMPING

Source	1x LED COB
Total power	12W
Emission	direct 35°
Switching	ON/OFF
Tension	220/250V
Color temperature	2700K
Luminous flux	670lm
Initial luminaire efficacy	56lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,2x15cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	ring not included, anti light loss system
Net lamp weight	0,8 kg

Codes

SALLN243
SALLW243

Structure


black
white

PACKAGE

Package 01

Dimension: 19x9x8 cm / Gross weight: 0,55 kg

Certificazioni

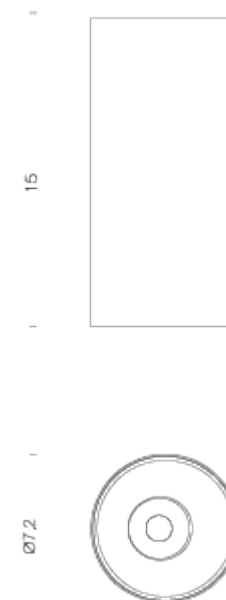

35° | 3000K

LAMPING

Source	1x LED COB
Total power	12W
Emission	direct 35°
Switching	ON/OFF
Tension	220/250V
Color temperature	3000K
Luminous flux	770lm
Initial luminaire efficacy	64lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,2x15cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	ring not included, anti light loss system
Net lamp weight	0,48 kg

Codes

SALLN343
SALLW343

Structure

black
white

PACKAGE

Package 01

Dimension: 19x9x8 cm / Gross weight: 0,55 kg

Certificazioni

