

SALINA

Familie von Downlight-Einbauleuchten für
Akzentbeleuchtung.

Die Leuchte kann um 30° vertikal und um 355° horizontal
rotiert werden, um die Beleuchtung in jede beliebige
Ausrichtung zu lenken.

Modulare Leuchte mit Aussenringen in verschiedenen
Oberflächen, leicht montier- und austauschbar mit
verschiedenen Abstrahlwinkeln.



RECESSED TRIMLESS 15° | 2700K

LAMPING

Source	LED
Total power	10W
Emission	direct adjustable 15°
Switching	according to driver
Tension	max 270mA
Color temperature	2700K
Luminous flux	640lm
Initial luminaire efficacy	64lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,1x9,5cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	driver and ring not included, orientable spot, trimless recessed hole Ø 77mm, depth 150mm, trim recessed hole Ø 75mm, cable length 0,4m

Energy class
Accessories
Net lamp weight

F
Drivers, Salina | Ring,
0,27 kg

Codes

SAL LW2 61

Structure

white

PACKAGE


Package 01

Dimension: 46x42x22 cm / Gross weight: 0,31 kg


Certificazioni



SALINA TRIMLESS

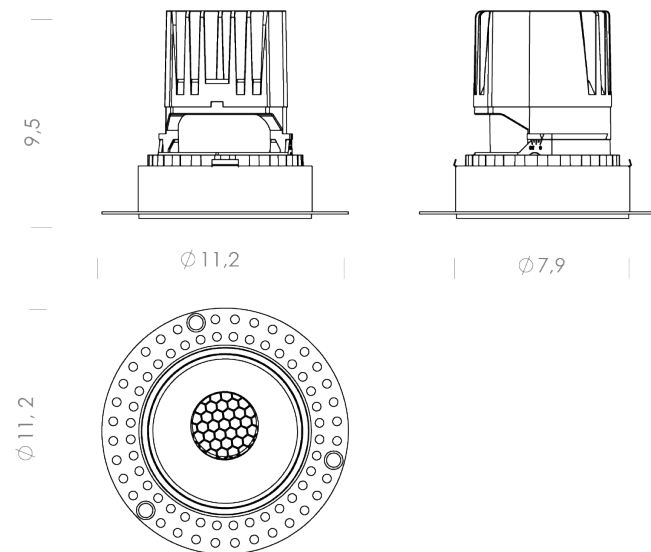

SALINA TRIM

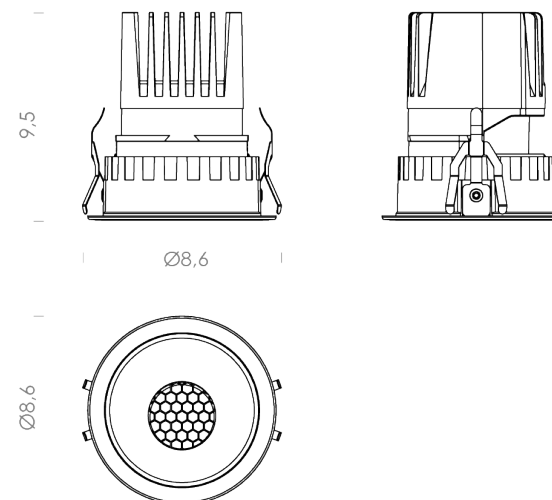

RECESSED TRIMLESS 15° | 3000K

LAMPING

Source	LED
Total power	10W
Emission	direct adjustable 15°
Switching	according to driver
Tension	max 270mA
Color temperature	2700K
Luminous flux	740lm
Initial luminaire efficacy	74lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,1x9,5cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	driver and ring not included, orientable spot, trimless recessed hole Ø 77mm, depth 150mm, trim recessed hole Ø 75mm, cable length 0,4m

Energy class	F
Accessories	Drivers, Salina Ring,
Net lamp weight	0,27 kg

Codes

SAL LW3 61

PACKAGE

Package 01

Certificazioni




LED
10W
direct adjustable 15°
according to driver
max 270mA
2700K
740lm
74lm/W
SDCM<3
90
20
ø7,1x9,5cm
0°C / +35°C
25°C
driver and ring not included, orientable spot, trimless recessed hole Ø 77mm, depth 150mm, trim recessed hole Ø 75mm, cable length 0,4m
F
Drivers, Salina Ring,
0,27 kg

Structure


white

Dimension: 46x42x22 cm / Gross weight: 0,31 kg

SALINA TRIMLESS

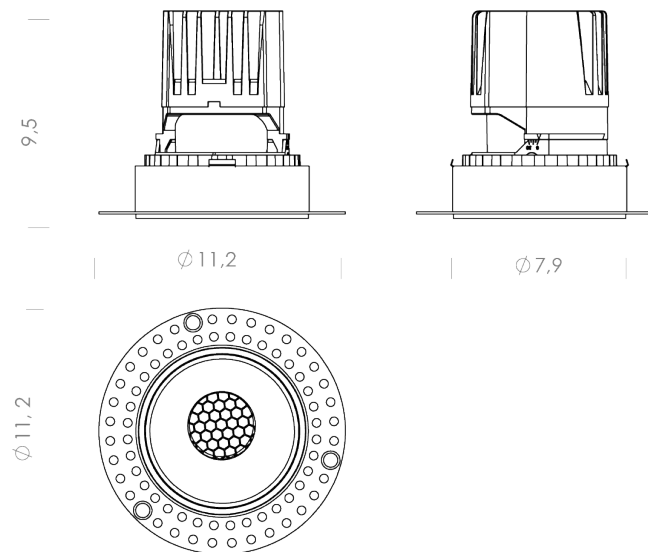

SALINA TRIM

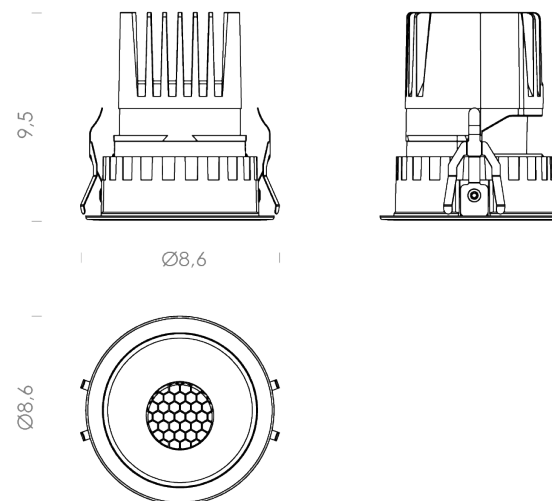

RECESSED TRIMLESS 35° | 3000K

LAMPING

Source	LED
Total power	10W
Emission	direct adjustable 35°
Switching	according to driver
Tension	max 270mA
Color temperature	3000K
Luminous flux	770lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,1x9,5cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	driver and ring not included, orientable spot, trimless recessed hole Ø 77mm, depth 150mm, trim recessed hole Ø 75mm, cable length 0,4m

Energy class	F
Accessories	Drivers, Salina Ring,
Net lamp weight	0,27 kg

Codes

SAL LW3 63

PACKAGE

Package 01

Certificazioni




LED
10W
direct adjustable 35°
according to driver
max 270mA
3000K
770lm
77lm/W
SDCM<3
90
20
ø7,1x9,5cm
0°C / +35°C
25°C
driver and ring not included, orientable spot, trimless recessed hole Ø 77mm, depth 150mm, trim recessed hole Ø 75mm, cable length 0,4m
F
Drivers, Salina Ring,
0,27 kg

Structure


white

Dimension: 46x42x22 cm / Gross weight: 0,31 kg

SALINA TRIMLESS

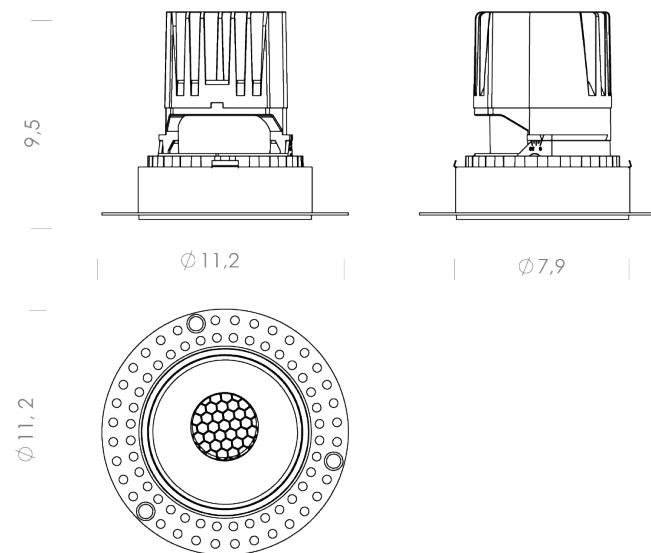

SALINA TRIM

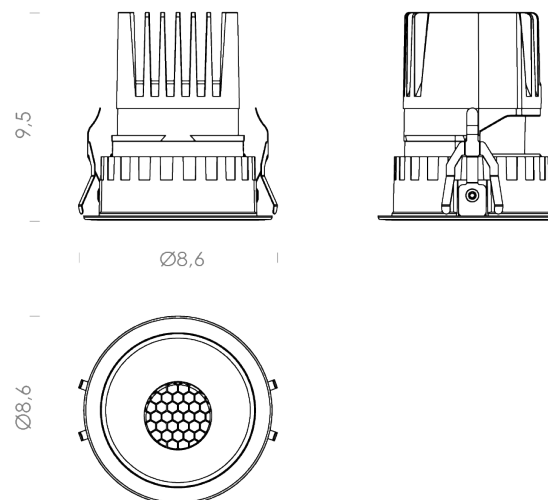

RECESSED TRIMLESS 35° | 2700K

LAMPING

Source	LED
Total power	10W
Emission	direct adjustable 35°
Switching	according to driver
Tension	max 270mA
Color temperature	2700K
Luminous flux	670lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,1x9,5cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Energy class
Accessories
Net lamp weight

driver and ring not included, orientable spot,
trimless recessed hole Ø 77mm, depth 150mm,
trim recessed hole Ø 75mm, cable length 0,4m
F
Drivers, Salina | Ring,
0,27 kg

Codes

SAL LW2 63

Structure

white

PACKAGE


Package 01

Dimension: 46x42x22 cm / Gross weight: 0,31 kg


Certificazioni



SALINA TRIMLESS

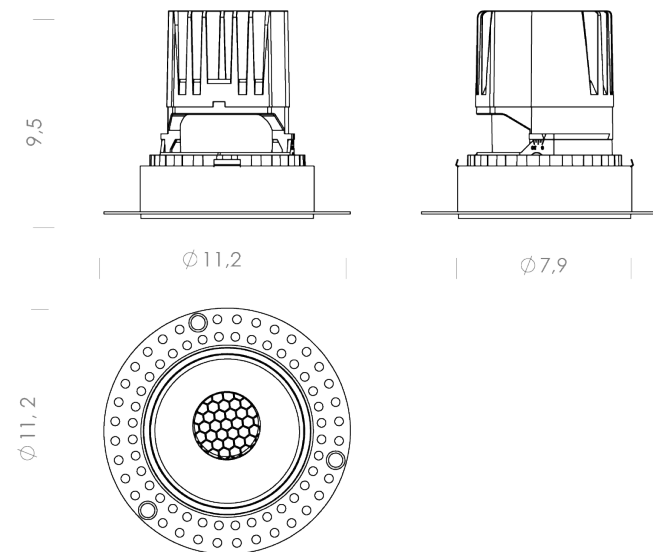

SALINA TRIM

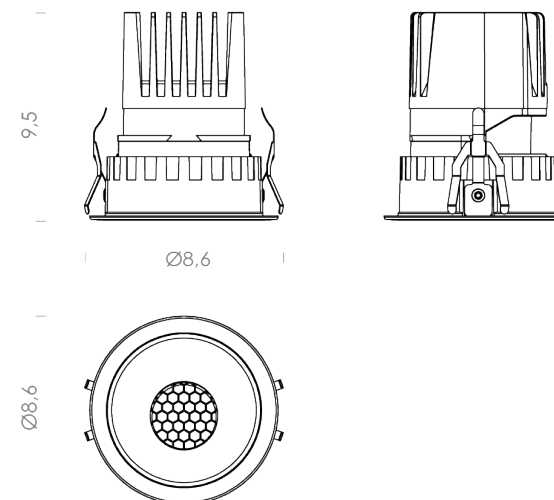

RECESSED TRIM 15° | 2700K

LAMPING

Source	LED
Total power	10W
Emission	direct adjustable 15°
Switching	according to driver
Tension	max 270mA
Color temperature	2700K
Luminous flux	700lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,1x9,5cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	driver and ring not included, orientable spot, trimless recessed hole Ø 77mm, depth 150mm, trim recessed hole Ø 75mm, cable length 0,4m

Energy class
Accessories
Net lamp weight

F
Drivers, Salina | Ring,
0,31 kg

Codes

SAT LW2 61
SAT LN2 61

Structure

white
black

PACKAGE


Package 01

Dimension: 46x42x22 cm / Gross weight: 0,34 kg


Certificazioni



SALINA TRIMLESS

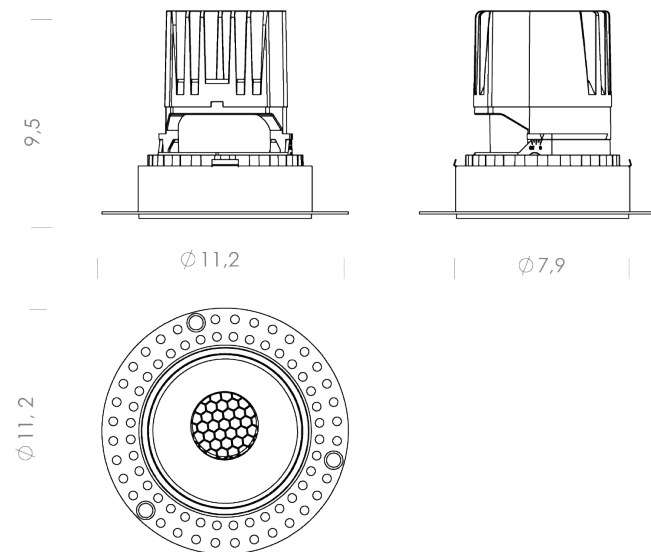

SALINA TRIM

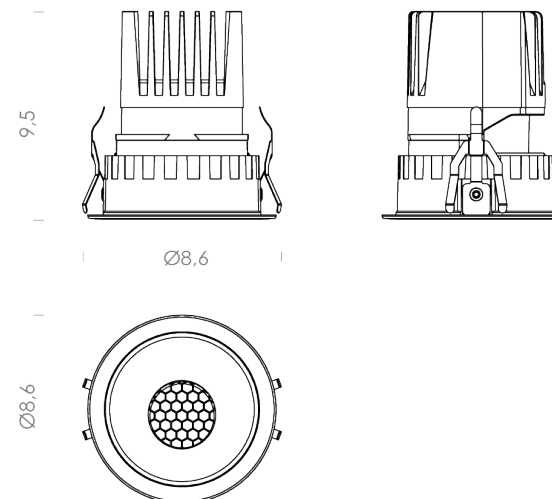

RECESSED TRIM 15° | 3000K

LAMPING

Source	LED
Total power	10W
Emission	direct adjustable 15°
Switching	according to driver
Tension	max270mA
Color temperature	3000K
Luminous flux	740lm
Initial luminaire efficacy	74lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø9x9,5cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Energy class
Accessories
Net lamp weight

driver and ring not included, orientable spot,
trimless recessed hole Ø 77mm, depth 150mm,
trim recessed hole Ø 75mm, cable length 0,4m
F
Drivers, Salina | Ring,
0,31 kg

Codes

SAT LW3 61
SAT LN3 61

Structure

white
black

PACKAGE


Package 01

Dimension: 46x42x22 cm / Gross weight: 0,34 kg


Certificazioni



SALINA TRIMLESS

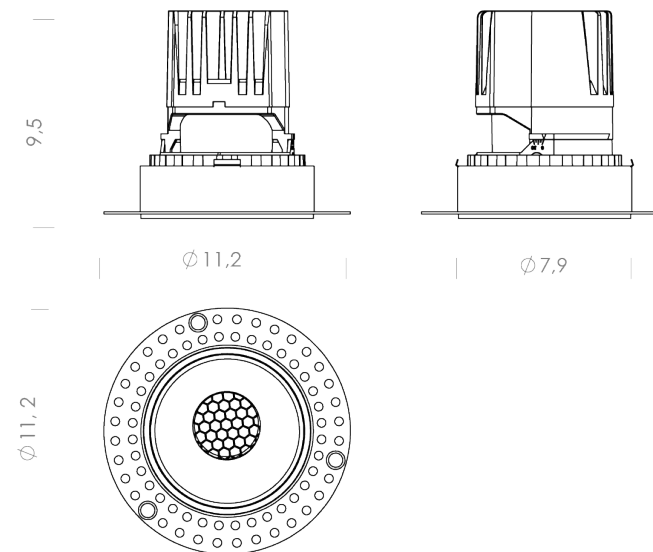

SALINA TRIM

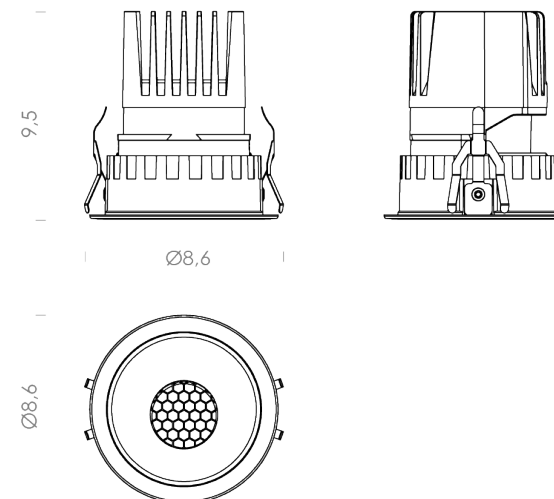

RECESSED TRIM 35° | 3000K

LAMPING

Source	LED
Total power	10W
Emission	direct adjustable 35°
Switching	according to driver
Tension	max 270mA
Color temperature	3000K
Luminous flux	770lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø9x9,5cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	driver and ring not included, orientable spot, trimless recessed hole Ø 77mm, depth 150mm, trim recessed hole Ø 75mm, cable length 0,4m

Energy class	F
Accessories	Drivers, Salina Ring,
Net lamp weight	0,31 kg

Codes

SAT LW3 63
SAT LN3 63

Structure

white
black

PACKAGE


Package 01

Dimension: 46x42x22 cm / Gross weight: 0,34 kg


Certificazioni



SALINA TRIMLESS

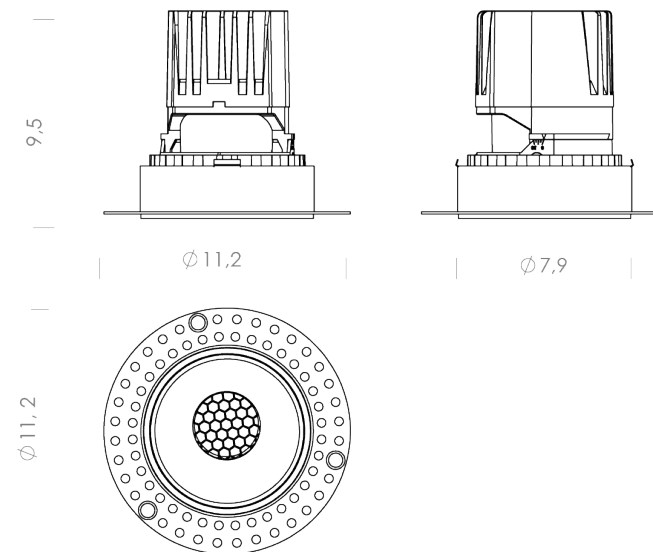

SALINA TRIM

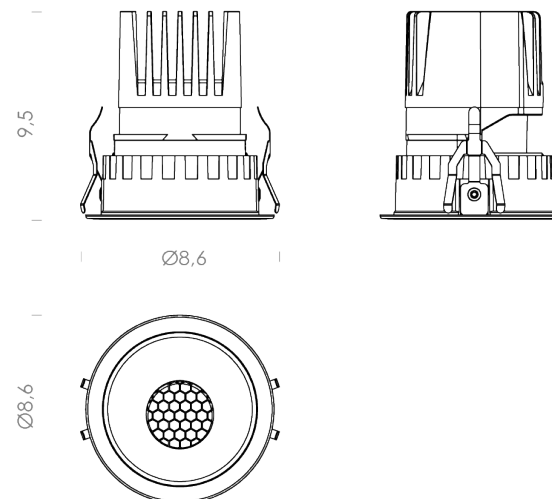

RECESSED TRIM 35° | 2700K

LAMPING

Source	LED
Total power	10W
Emission	direct adjustable 35°
Switching	according to driver
Tension	max 270mA
Color temperature	2700K
Luminous flux	670lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø9x9,5cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	driver and ring not included, orientable spot, trimless recessed hole Ø 77mm, depth 150mm, trim recessed hole Ø 75mm, cable length 0,4m

Energy class
Accessories
Net lamp weight

F
Drivers, Salina | Ring,
0,31 kg

Codes

SAT LW2 63
SAT LN2 63

Structure

white
black

PACKAGE


Package 01

Dimension: 46x42x22 cm / Gross weight: 0,34 kg

Certificazioni



SALINA TRIMLESS

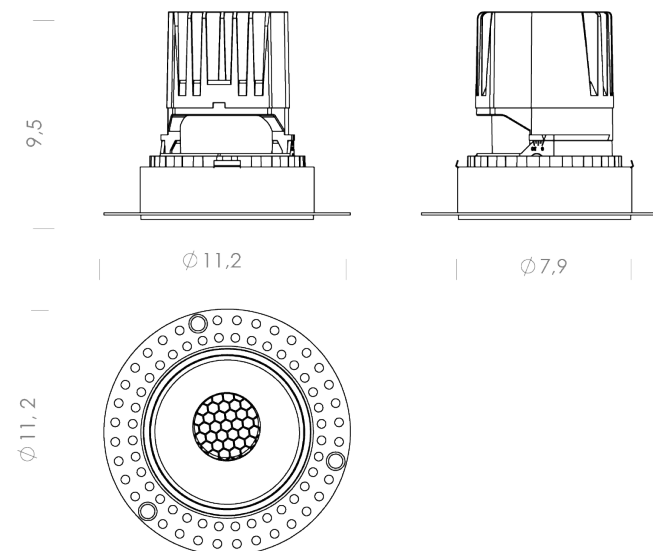

SALINA TRIM

