


SLACKLINE IP67

La famille Slackline est complétée par la version IP67 dédiée à l'éclairage extérieur ponctuel et de signalisation. Caractérisé par un design essentiel et le revêtement en résine opale du ruban LED garantissant le degré IP indiqué, Slackline est proposé en différentes longueurs et avec deux températures de couleur. Slackline IP67 représente le produit idéal pour créer des solutions de ligne continue, répondant aux besoins spécifiques de projets en extérieur ou dans des environnements nécessitant un degré de protection plus élevé. La fixation au plafond s'effectue via les supports inclus.

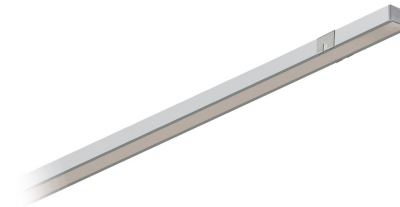

1M | 3000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	457lm
Initial luminaire efficacy	30lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	101x2,3x1,5cm
Materials	aluminium
Performance ambient temperature	25°C
Notes	driver not included cable length 0,5m
Customization options	CCT 2700K, body length recessed, suspended, wall version

Codes

BSLAS810G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm

Certificazioni



SLACKLINE IP67

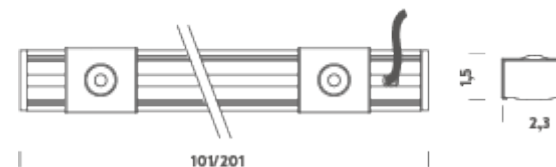

1M | 4000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	540lm
Initial luminaire efficacy	36lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	101x2,3x1,5cm
Materials	aluminium
Performance ambient temperature	25°C
Notes	driver not included cable length 0,5m
Customization options	CCT 2700K, body length recessed, suspended, wall version

Codes

BSLAS810G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm

Certificazioni



SLACKLINE IP67

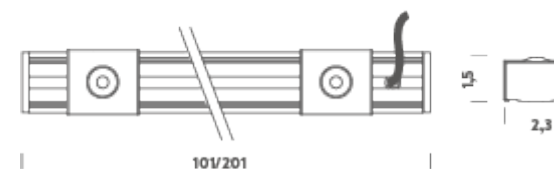

2M | 3000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	914lm
Initial luminaire efficacy	30lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	201x2,3x1,5cm
Materials	aluminium
Performance ambient temperature	25°C
Notes	driver not included cable length 0,5m
Customization options	CCT 2700K, body length recessed, suspended, wall version

Codes

BSLAS820G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm

Certificazioni



SLACKLINE IP67

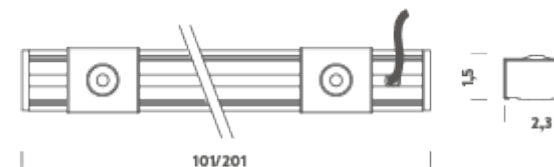

2M | 4000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1080lm
Initial luminaire efficacy	36lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	201x2,3x1,5cm
Materials	aluminium
Performance ambient temperature	25°C
Notes	driver not included cable length 0,5m
Customization options	CCT 2700K, body length recessed, suspended, wall version

Codes

BSLAS820G26NAA

Structure

grey

PACKAGE

Package 01

Dimension: 205x11x2,5 cm

Certificazioni



SLACKLINE IP67

