


# SLACKLINE MICRO

La famille SLACKLINE est composé d'une ample sélection de profilés en aluminium avec différents types de fixation, dotés de la même source lumineuse: Slackline Trim, Slackline Regular et Slackline Micro. Ces caractéristiques rendent l'utilisation du Slackline très flexible pour chaque contexte. Design minimal et grande qualité de la lumière. Slackline représente la solution idéale pour réaliser une ligne continue (sur demande). Selon le type de montage, diverses longueurs standard sont disponibles et avec un IRC>94.

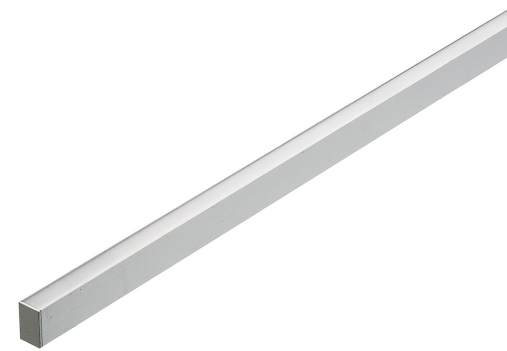

# 1M - 3000K

## LAMPING

|                                 |                                        |
|---------------------------------|----------------------------------------|
| Source                          | LED strip                              |
| Total power                     | 15W                                    |
| Emission                        | diffused                               |
| Switching                       | according to driver                    |
| Tension                         | 24VDC                                  |
| Color temperature               | 3000K                                  |
| Luminous flux                   | 457lm                                  |
| Initial luminaire efficacy      | 30lm/W                                 |
| Initial chromaticity            | SDCM <3                                |
| Typ CRI                         | 90                                     |
| IP class                        | 40                                     |
| Dimensions                      | 1,5x1x98,5cm                           |
| Materials                       | anodized aluminum                      |
| Ambient temperature range       | - 20°C / 35°C                          |
| Performance ambient temperature | 25°C                                   |
| Notes                           | driver not included, cable length 0,5m |
| Customization options           | CCT 2700K, body length                 |
| Accessories                     | Drivers 24VDC + DALI interface,        |
| Net lamp weight                 | 0,2 kg                                 |

## Codes

BSLM0410G65WAA

## Structure

grey

## PACKAGE

Package 01      Dimension: 100x5x5 cm / Gross weight: 0,2 kg

## Certificazioni



## 1M - 4000K

### LAMPING

|                                 |                                        |
|---------------------------------|----------------------------------------|
| Source                          | LED strip                              |
| Total power                     | 15W                                    |
| Emission                        | diffused                               |
| Switching                       | according to driver                    |
| Tension                         | 24VDC                                  |
| Color temperature               | 4000K                                  |
| Luminous flux                   | 540lm                                  |
| Initial luminaire efficacy      | 36lm/W                                 |
| Initial chromaticity            | SDCM <3                                |
| Typ CRI                         | 90                                     |
| IP class                        | 40                                     |
| Dimensions                      | 1,5x1x98,5cm                           |
| Materials                       | anodized aluminum                      |
| Ambient temperature range       | - 20°C / 35°C                          |
| Performance ambient temperature | 25°C                                   |
| Notes                           | driver not included, cable length 0,5m |
| Customization options           | CCT 2700K, body length                 |
| Accessories                     | Drivers 24VDC + DALI interface,        |
| Net lamp weight                 | 0,2 kg                                 |

### Codes

BSLM0410G65NAA

### Structure

grey

### PACKAGE

Package 01

Dimension: 100x5x5 cm / Gross weight: 0,2 kg

### Certificazioni



2M - 3000K

LAMPING

|                                 |                                        |
|---------------------------------|----------------------------------------|
| Source                          | LED strip                              |
| Total power                     | 30W                                    |
| Emission                        | diffused                               |
| Switching                       | according to driver                    |
| Tension                         | 24VDC                                  |
| Color temperature               | 3000K                                  |
| Luminous flux                   | 914lm                                  |
| Initial luminaire efficacy      | 30lm/W                                 |
| Initial chromaticity            | SDCM <3                                |
| Typ CRI                         | 90                                     |
| IP class                        | 40                                     |
| Dimensions                      | 1,5x1x198,5cm                          |
| Materials                       | anodized aluminum                      |
| Ambient temperature range       | - 20°C / 35°C                          |
| Performance ambient temperature | 25°C                                   |
| Notes                           | driver not included, cable length 0,5m |
| Customization options           | CCT 2700K, body length                 |
| Accessories                     | Drivers 24VDC + DALI interface,        |
| Net lamp weight                 | 0,4 kg                                 |

Codes

BSLM0420G65WAA

Structure

grey

PACKAGE

Package 01

Dimension: 200x5x5 cm / Gross weight: 0,4 kg

Certificazioni



2M - 4000K

LAMPING

|                                 |                                        |
|---------------------------------|----------------------------------------|
| Source                          | LED strip                              |
| Total power                     | 30W                                    |
| Emission                        | diffused                               |
| Switching                       | according to driver                    |
| Tension                         | 24VDC                                  |
| Color temperature               | 4000K                                  |
| Luminous flux                   | 1080lm                                 |
| Initial luminaire efficacy      | 36lm/W                                 |
| Initial chromaticity            | SDCM <3                                |
| Typ CRI                         | 90                                     |
| IP class                        | 40                                     |
| Dimensions                      | 1,5x1x198,5cm                          |
| Materials                       | anodized aluminum                      |
| Ambient temperature range       | - 20°C / 35°C                          |
| Performance ambient temperature | 25°C                                   |
| Notes                           | driver not included, cable length 0,5m |
| Customization options           | CCT 2700K, body length                 |
| Accessories                     | Drivers 24VDC + DALI interface,        |
| Net lamp weight                 | 0,4 kg                                 |

Codes

BSLM0420G65NAA

Structure

grey

PACKAGE

Package 01      Dimension: 200x5x5 cm / Gross weight: 0,4 kg

Certificazioni



LAMPING

|                                 |                                        |
|---------------------------------|----------------------------------------|
| Source                          | LED strip                              |
| Total power                     | 45W                                    |
| Emission                        | diffused                               |
| Switching                       | according to driver                    |
| Tension                         | 24VDC                                  |
| Color temperature               | 3000K                                  |
| Luminous flux                   | 1377lm                                 |
| Initial luminaire efficacy      | 31lm/W                                 |
| Initial chromaticity            | SDCM<3                                 |
| Typ CRI                         | 90                                     |
| IP class                        | 40                                     |
| Dimensions                      | 1,5x1x298,5cm                          |
| Materials                       | anodized aluminium                     |
| Ambient temperature range       | - 20°C / 35°C                          |
| Performance ambient temperature | 25°C                                   |
| Notes                           | driver not included, cable length 0,5m |
| Customization options           | CCT 2700K, body length                 |
| Accessories                     | Drivers 24VDC + DALI interface,        |
| Net lamp weight                 | 0,60 kg                                |

Codes

BSLM0430G65WAA

Structure

grey

PACKAGE

Package 01      Dimension: 300x5x5 cm / Gross weight: 0,60 kg

Certificazioni



3M | 4000K

LAMPING

|                                 |                                        |
|---------------------------------|----------------------------------------|
| Source                          | LED strip                              |
| Total power                     | 45W                                    |
| Emission                        | diffused                               |
| Switching                       | according to driver                    |
| Tension                         | 24VDC                                  |
| Color temperature               | 4000K                                  |
| Luminous flux                   | 4000K                                  |
| Initial luminaire efficacy      | 36lm/W                                 |
| Initial chromaticity            | SDCM<3                                 |
| Typ CRI                         | 90                                     |
| IP class                        | 40                                     |
| Dimensions                      | 1,5x1x298,5cm                          |
| Materials                       | anodized aluminium                     |
| Ambient temperature range       | - 20°C / 35°C                          |
| Performance ambient temperature | 25°C                                   |
| Notes                           | driver not included, cable length 0,5m |
| Customization options           | CCT 2700K, body length                 |
| Accessories                     | Drivers 24VDC + DALI interface,        |
| Net lamp weight                 | 0,6 kg                                 |

Codes

BSLM0430G65NAA

PACKAGE

Package 01

Certificazioni



Structure

grey

Dimension: 300x5x5 cm / Gross weight: 0,6 kg