

WALKLINE WALL WASHER

WALKLINE est un système d'éclairage extérieur à LED linéaire de 24 V CC.

Proposé en deux versions dédiées respectivement à un éclairage homogène obtenu grâce à une surface en résine opale, ou wall-washer équipé d'une optique spécifique. La famille WALKLINE est proposée en différentes longueurs et températures de couleur. Dimmable 1-10V, DALI ou DMX. Installation via le boîtier d'encastrement (inclus). WALKLINE et WALKLINE WALL-WASHER ont un indice de résistance élevé: ils sont à la fois piétonniers et carrossables. Ils trouvent leur application dans les environnements extérieurs pour du balisage ou éclairage décoratif.



0,61M | 3000K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Mechanical impact protection code
Notes

Customization options
Accessories
Net lamp weight

LED strip
12W
asymmetric 45°
according to driver
24VDC
3000K
1030lm
86lm/W
SDCM<3
90
67
61x3x9,25cm
aluminium
-20°C / +35°C
25°C
IK10

driver not included, cable length 1m, certified
500kg static load, 3500kg dynamic load
body length
Drivers 24VDC + DALI interface,
1,75 kg

Codes

BWLK0206W52WAA

Structure


grey

PACKAGE

Package 01

Dimension: 52x3x9 cm / Gross weight: 1,75 kg

Certificazioni

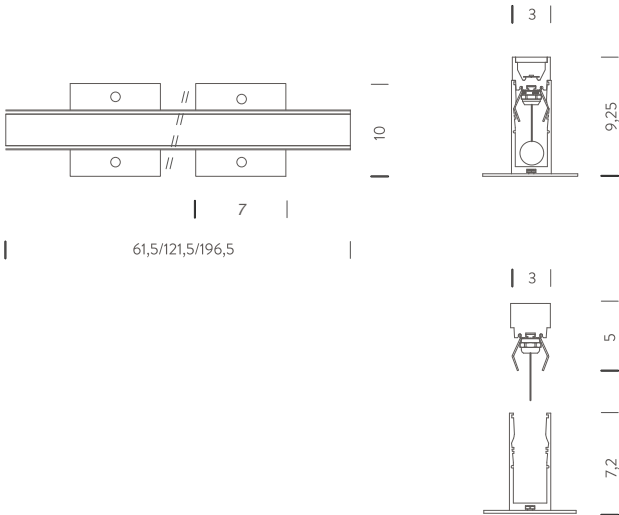

0,61M | 4000K

LAMPING

Source	LED strip
Total power	12W
Emission	asymmetric 45°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1144lm
Initial luminaire efficacy	95lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	61x3x9,25cm
Materials	aluminium
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load

Customization options
Accessories
Net lamp weight

body length
Drivers 24VDC + DALI interface,
1,75 kg

Codes

BWLK0206W52NAA

Structure


grey

PACKAGE

Package 01

Dimension: 52x3x9 cm / Gross weight: 1,75 kg

Certificazioni

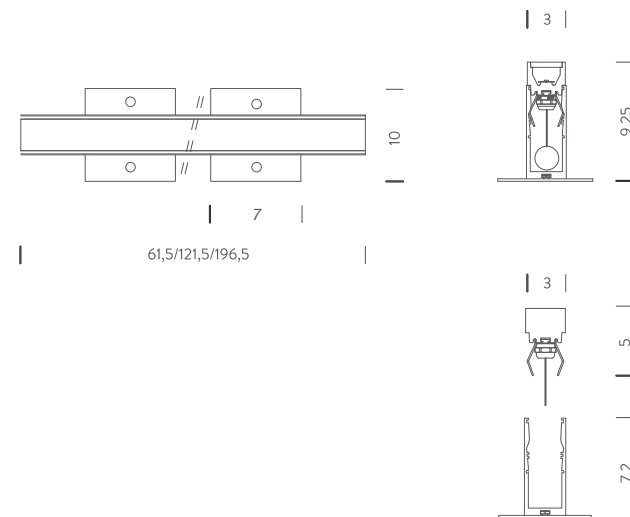

1,21M | 3000K

LAMPING

Source LED strip
Total power 24W
Emission asymmetric 45°
Switching according to driver
Tension 24VDC
Color temperature 3000K
Luminous flux 2060lm
Initial luminaire efficacy 86lm/W
Initial chromaticity SDCM<3
Typ CRI 90
IP class 67
Dimensions 121x3x9,25cm
Materials aluminium
Ambient temperature range -20°C / +35°C
Performance ambient temperature 25°C
Mechanical impact protection code IK10
Notes driver not included, cable length 1m, certified
500kg static load, 3500kg dynamic load
body length
Accessories Drivers 24VDC + DALI interface,
Net lamp weight 3,5 kg

Codes

BWLK0209W52WAA

PACKAGE

Package 01

Certificazioni




LED strip
24W
asymmetric 45°
according to driver
24VDC
3000K
2060lm
86lm/W
SDCM<3
90
67
121x3x9,25cm
aluminium
-20°C / +35°C
25°C
IK10
driver not included, cable length 1m, certified
500kg static load, 3500kg dynamic load
body length
Drivers 24VDC + DALI interface,
3,5 kg

Structure

grey

Dimension: 103x3x9 cm / Gross weight: 3,5 kg

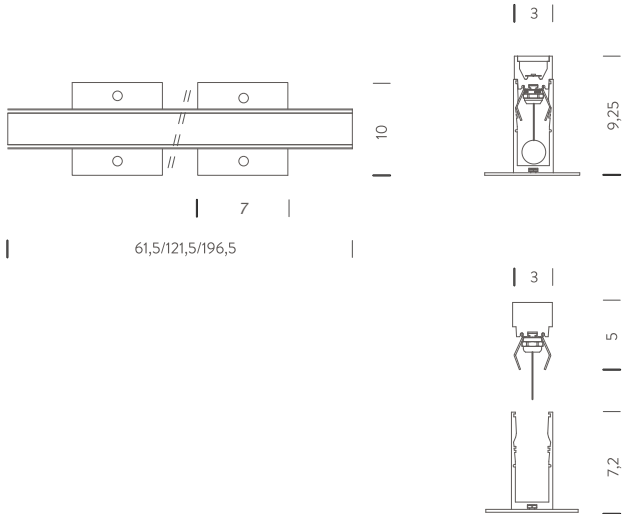

1,21M | 4000K

LAMPING

Source	LED strip
Total power	24W
Emission	asymmetric 45°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2288lm
Initial luminaire efficacy	95lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	121x3x9,25cm
Materials	aluminium
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load body length
Customization options	
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	3,5 kg

Codes

BWLK0209W52NAA

PACKAGE

Package 01

Certificazioni




LED strip
24W
asymmetric 45°
according to driver
24VDC
4000K
2288lm
95lm/W
SDCM<3
90
67
121x3x9,25cm
aluminium
-20°C / +35°C
25°C
IK10
driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load body length
Drivers 24VDC + DALI interface,
3,5 kg

Structure

grey

Dimension: 103x3x9 cm / Gross weight: 3,5 kg

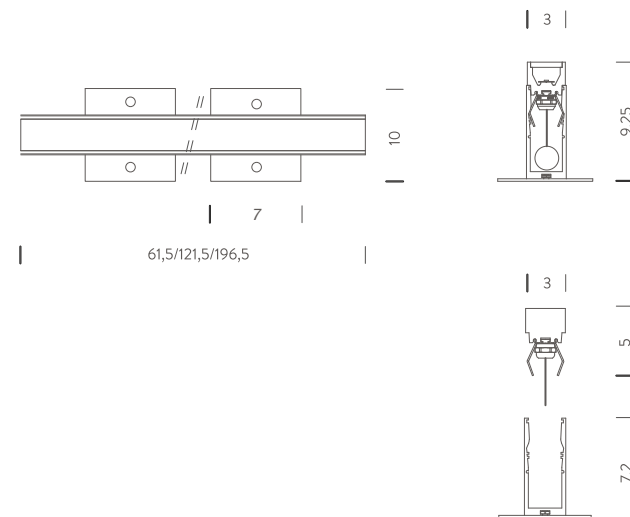

1,96M | 3000K

LAMPING

Source	LED strip
Total power	40W
Emission	asymmetric 45°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	3433lm
Initial luminaire efficacy	86lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	196x3x9,25cm
Materials	aluminium
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load body length
Customization options	
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	7 kg

Codes

BWLK0220W52WAA

PACKAGE

Package 01

Certificazioni




LED strip
40W
asymmetric 45°
according to driver
24VDC
3000K
3433lm
86lm/W
SDCM<3
90
67
196x3x9,25cm
aluminium
-20°C / +35°C
25°C
IK10
driver not included, cable length 1m, certified 500kg static load, 3500kg dynamic load body length
Drivers 24VDC + DALI interface,
7 kg

Structure

grey

Dimension: 200x3x9 cm / Gross weight: 7 kg

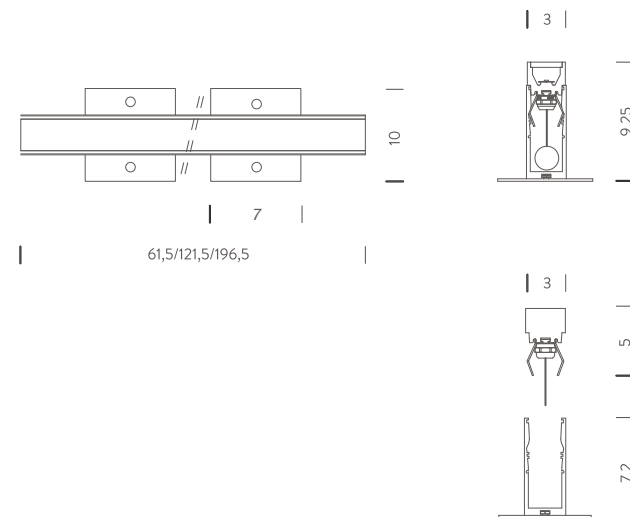

1,96M | 4000K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Mechanical impact protection code
Notes

Customization options
Accessories
Net lamp weight

LED strip
40W
asymmetric 45°
according to driver
24VDC
4000K
3815lm
95lm/W
SDCM<3
90
67
196x3x9,25cm
aluminium
-20°C / +35°C
25°C
IK10

driver not included, cable length 1m, certified
500kg static load, 3500kg dynamic load
body length
Drivers 24VDC + DALI interface,
7 kg

Codes

BWLK0220W52NAA

Structure

grey

PACKAGE

Package 01

Dimension: 200x3x9 cm / Gross weight: 7 kg

Certificazioni

