

# ZIRKOL CIRCLE

ZIRKOL C est une famille de circulaire luminaires suspendus idéale pour l'éclairage général et décoratif. Corps en aluminium anodisé et écran de protection opale pour un éclairage homogène. L'émission de la lumière peut être directe ou directe/indirecte avec un haut flux lumineux et trois différente température de couleur. Alimentation déportée et dimmer interface incluse.



## HOME Ø 0,85M | DOWNLIGHT - 2700K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                                    |
| Total power                     | 35W                                                                                                                                                                                                                                          |
| Emission                        | diffused orientable                                                                                                                                                                                                                          |
| Switching                       | DALI                                                                                                                                                                                                                                         |
| Tension                         | 24V                                                                                                                                                                                                                                          |
| Color temperature               | 2700K                                                                                                                                                                                                                                        |
| Luminous flux                   | 2000lm                                                                                                                                                                                                                                       |
| Initial luminaire efficacy      | 57lm/W                                                                                                                                                                                                                                       |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                                       |
| Typ CRI                         | 90                                                                                                                                                                                                                                           |
| IP class                        | 40                                                                                                                                                                                                                                           |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                                                      |
| Materials                       | aluminium                                                                                                                                                                                                                                    |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                                  |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                                         |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer CASAMBI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included   RAL 9005 black   RAL 9016 white   shipped assembled |

### Customization options

|                 |                              |
|-----------------|------------------------------|
| Energy class    | E                            |
| Accessories     | Canopy, for concrete ceiling |
| Net lamp weight | 3 kg                         |

### Codes

BZRC1608G15DBO  
BZRC1608G15DNE  
BZRC1608G15DOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

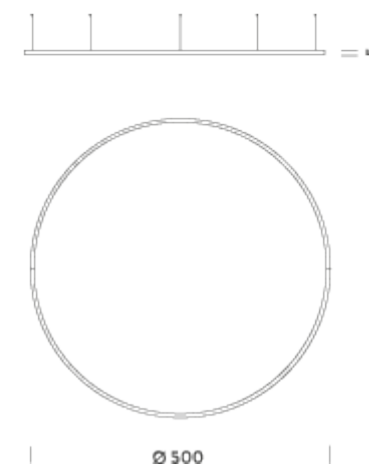

## HOME Ø 0,85M | DOWNLIGHT - 2700K - TRIAC

### LAMPING

|                                 |                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                            |
| Total power                     | 35W                                                                                                                                                                                                                  |
| Emission                        | diffused orientable                                                                                                                                                                                                  |
| Switching                       | TRIAC                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                  |
| Color temperature               | 2700K                                                                                                                                                                                                                |
| Luminous flux                   | 2000lm                                                                                                                                                                                                               |
| Initial luminaire efficacy      | 57lm/W                                                                                                                                                                                                               |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                               |
| Typ CRI                         | 90                                                                                                                                                                                                                   |
| IP class                        | 40                                                                                                                                                                                                                   |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                              |
| Materials                       | aluminium                                                                                                                                                                                                            |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                          |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                 |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

### Codes

BZRC2708G15DBO  
BZRC2708G15DNE  
BZRC2708G15DOR

### PACKAGE

Package 01

### Certificazioni




### Structure




white  
black

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

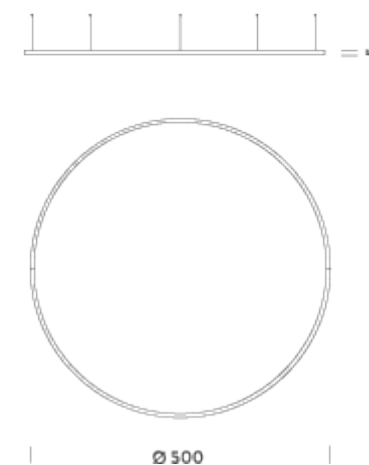

HOME Ø 0,85M | DOWNLIGHT - 2700K - CASAMBI

LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

strip LED  
35W  
diffused orientable  
CASAMBI  
24V  
2700K  
2000lm  
57lm/W  
SDCM<3  
90  
40  
ø85x5cm  
aluminium  
0°C / +35°C  
25°C  
included: round canopy with 1 driver 75W  
(110/240V) | 1 dimmer CASAMBI | 1 electrical cable  
4m | 3x adjustable metal cables (length from 3m to  
0,5m) | ceiling attachment included | RAL 9005  
black, RAL 9016 white | Shipped assembled  
light configurations, separate light control, control  
systems  
3 kg

Customization options

Net lamp weight

Codes

BZRC3308G15DBO  
BZRC3308G15DNE  
BZRC3308G15DOR

PACKAGE

Package 01

Structure


white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

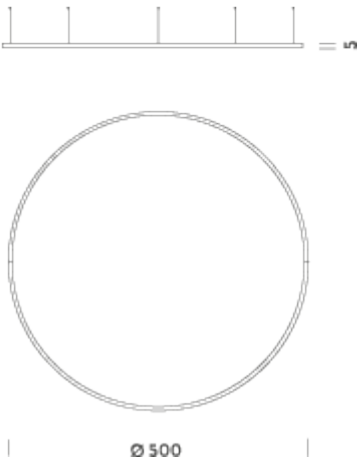

## HOME Ø 0,85M | UP-DOWNLIGHT - 2700K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                                  |
| Total power                     | 70W                                                                                                                                                                                                                                        |
| Emission                        | diffused orientable                                                                                                                                                                                                                        |
| Switching                       | DALI                                                                                                                                                                                                                                       |
| Tension                         | 24V                                                                                                                                                                                                                                        |
| Color temperature               | 2700K                                                                                                                                                                                                                                      |
| Luminous flux                   | 4000lm                                                                                                                                                                                                                                     |
| Initial luminaire efficacy      | 57lm/W                                                                                                                                                                                                                                     |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                                     |
| Typ CRI                         | 90                                                                                                                                                                                                                                         |
| IP class                        | 40                                                                                                                                                                                                                                         |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                                                    |
| Materials                       | aluminium                                                                                                                                                                                                                                  |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                                |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                                       |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included   RAL 9005 black   RAL 9016 white   shipped assembled |

### Customization options

|                 |                              |
|-----------------|------------------------------|
| Energy class    | E                            |
| Accessories     | Canopy, for concrete ceiling |
| Net lamp weight | 3 kg                         |

### Codes

BZRC1708G15DBO  
BZRC1708G15DNE  
BZRC1708G15DOR

### Structure

white  
black  
gold


### PACKAGE

|            |                                                 |
|------------|-------------------------------------------------|
| Package 01 | Dimension: 115x115x12 cm / Gross weight: 5,5 kg |
|------------|-------------------------------------------------|




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

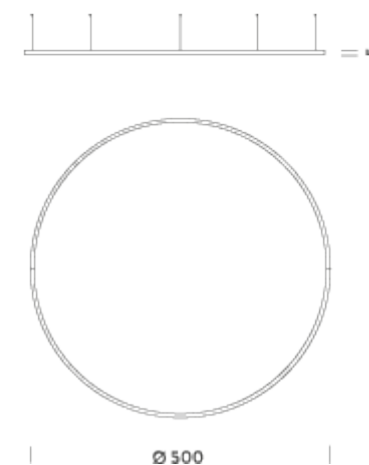

## HOME Ø 0,85M | UP-DOWNLIGHT - 2700K - TRIAC

### LAMPING

|                                 |                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                            |
| Total power                     | 70W                                                                                                                                                                                                                  |
| Emission                        | diffused orientable                                                                                                                                                                                                  |
| Switching                       | TRIAC                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                  |
| Color temperature               | 2700K                                                                                                                                                                                                                |
| Luminous flux                   | 4000lm                                                                                                                                                                                                               |
| Initial luminaire efficacy      | 57lm/W                                                                                                                                                                                                               |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                               |
| Typ CRI                         | 90                                                                                                                                                                                                                   |
| IP class                        | 40                                                                                                                                                                                                                   |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                              |
| Materials                       | aluminium                                                                                                                                                                                                            |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                          |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                 |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

### Codes

BZRC2808G15DBO  
BZRC2808G15DNE  
BZRC2808G15DOR

### PACKAGE

Package 01

### Certificazioni




### Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

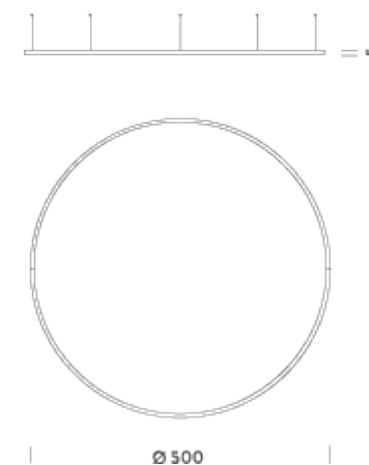

# HOME Ø 0,85M | UP-DOWNLIGHT - 2700K - CASAMBI

## LAMPING

|                                 |                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                                               |
| Total power                     | 70W                                                                                                                                                                                                                                     |
| Emission                        | diffused orientable                                                                                                                                                                                                                     |
| Switching                       | CASAMBI                                                                                                                                                                                                                                 |
| Tension                         | 24V                                                                                                                                                                                                                                     |
| Color temperature               | 2700K                                                                                                                                                                                                                                   |
| Luminous flux                   | 4000lm                                                                                                                                                                                                                                  |
| Initial luminaire efficacy      | 57lm/W                                                                                                                                                                                                                                  |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                                  |
| Typ CRI                         | 90                                                                                                                                                                                                                                      |
| IP class                        | 40                                                                                                                                                                                                                                      |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                                                 |
| Materials                       | aluminium                                                                                                                                                                                                                               |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                             |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                                    |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 dimmer CASAMBI   1 electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

## Codes

BZRC3408G15NBO  
BZRC3408G15NNE  
BZRC3408G15NOR

## PACKAGE

Package 01

## Certificazioni




## Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

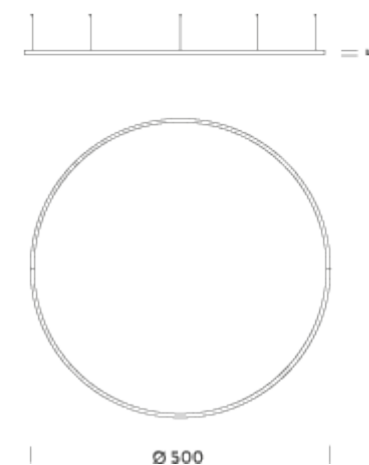

HOME Ø 0,85M | DOWNLIGHT - 3000K - DALI

LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

LED strip  
35W  
diffused orientable  
DALI  
24V  
3000K  
2200lm  
63lm/W  
SDCM<3  
90  
40  
ø85x5cm  
aluminium  
0°C / +35°C  
25°C  
included: round canopy with 1 x driver 75W  
(110/240V) | 1 x dimmer CASAMBI | 1 x electrical  
cable 4m | 3 x adjustable metal cable (length from  
3m to 0,5m) ceiling attachment included | RAL  
9005 black | RAL 9016 white | shipped assembled  
light configurations, separate light control, control  
systems  
Energy class  
Accessories  
Net lamp weight

Codes

BZRC1608G15WBO  
BZRC1608G15WNE  
BZRC1608G15WOR

Structure

white  
black  
gold

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

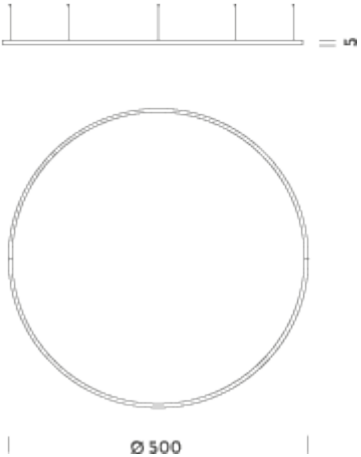

## HOME Ø 0,85M | DOWNLIGHT - 3000K - TRIAC

### LAMPING

|                                 |                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                            |
| Total power                     | 35W                                                                                                                                                                                                                  |
| Emission                        | diffused orientable                                                                                                                                                                                                  |
| Switching                       | TRIAC                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                  |
| Color temperature               | 3000K                                                                                                                                                                                                                |
| Luminous flux                   | 2200lm                                                                                                                                                                                                               |
| Initial luminaire efficacy      | 63lm/W                                                                                                                                                                                                               |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                               |
| Typ CRI                         | 90                                                                                                                                                                                                                   |
| IP class                        | 40                                                                                                                                                                                                                   |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                              |
| Materials                       | aluminium                                                                                                                                                                                                            |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                          |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                 |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

### Codes

BZRC2708G15WBO  
BZRC2708G15WNE  
BZRC2708G15WOR

### PACKAGE

Package 01

### Certificazioni




### Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

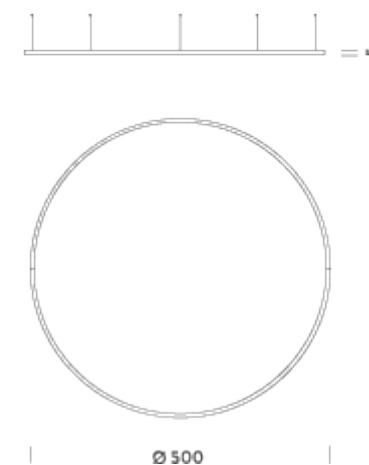

HOME Ø 0,85M | DOWNLIGHT - 3000K - CASAMBI

LAMPING

|                                 |                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                                               |
| Total power                     | 35W                                                                                                                                                                                                                                     |
| Emission                        | diffused orientable                                                                                                                                                                                                                     |
| Switching                       | CASAMBI                                                                                                                                                                                                                                 |
| Tension                         | 24V                                                                                                                                                                                                                                     |
| Color temperature               | 3000K                                                                                                                                                                                                                                   |
| Luminous flux                   | 2200lm                                                                                                                                                                                                                                  |
| Initial luminaire efficacy      | 63lm/W                                                                                                                                                                                                                                  |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                                  |
| Typ CRI                         | 90                                                                                                                                                                                                                                      |
| IP class                        | 40                                                                                                                                                                                                                                      |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                                                 |
| Materials                       | aluminium                                                                                                                                                                                                                               |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                             |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                                    |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 dimmer CASAMBI   1 electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |
| Customization options           | light configurations, separate light control, control systems                                                                                                                                                                           |
| Net lamp weight                 | 3 kg                                                                                                                                                                                                                                    |

Codes

BZRC3308G15WBO  
BZRC3308G15WNE  
BZRC3308G15WOR

PACKAGE

Package 01

Certificazioni




Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

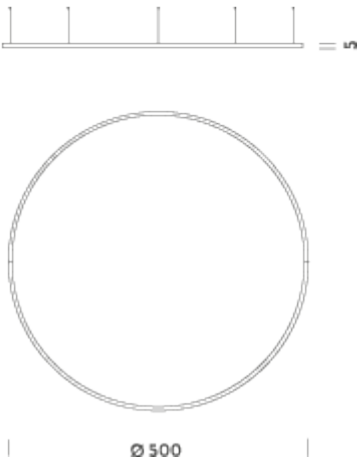

## HOME Ø 0,85M | UP-DOWNLIGHT - 3000K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                                  |
| Total power                     | 70W                                                                                                                                                                                                                                        |
| Emission                        | diffused orientable                                                                                                                                                                                                                        |
| Switching                       | DALI                                                                                                                                                                                                                                       |
| Tension                         | 24V                                                                                                                                                                                                                                        |
| Color temperature               | 3000K                                                                                                                                                                                                                                      |
| Luminous flux                   | 4400lm                                                                                                                                                                                                                                     |
| Initial luminaire efficacy      | 63lm/W                                                                                                                                                                                                                                     |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                                     |
| Typ CRI                         | 90                                                                                                                                                                                                                                         |
| IP class                        | 40                                                                                                                                                                                                                                         |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                                                    |
| Materials                       | aluminium                                                                                                                                                                                                                                  |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                                |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                                       |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included   RAL 9005 black   RAL 9016 white   shipped assembled |

### Customization options

|                 |                              |
|-----------------|------------------------------|
| Energy class    | E                            |
| Accessories     | Canopy, for concrete ceiling |
| Net lamp weight | 3 kg                         |

### Codes

BZRC1708G15WBO  
BZRC1708G15WNE  
BZRC1708G15WOR

### Structure

white  
black  
gold


### PACKAGE

|            |                                                 |
|------------|-------------------------------------------------|
| Package 01 | Dimension: 115x115x12 cm / Gross weight: 5,5 kg |
|------------|-------------------------------------------------|




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

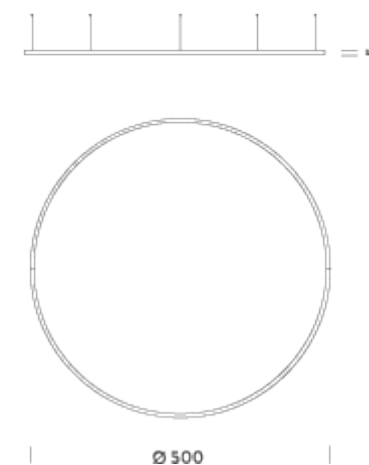

# HOME Ø 0,85M | UP-DOWNLIGHT - 3000K - TRIAC

## LAMPING

|                                 |                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                            |
| Total power                     | 70W                                                                                                                                                                                                                  |
| Emission                        | diffused orientable                                                                                                                                                                                                  |
| Switching                       | TRIAC                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                  |
| Color temperature               | 3000K                                                                                                                                                                                                                |
| Luminous flux                   | 4400lm                                                                                                                                                                                                               |
| Initial luminaire efficacy      | 63lm/W                                                                                                                                                                                                               |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                               |
| Typ CRI                         | 90                                                                                                                                                                                                                   |
| IP class                        | 40                                                                                                                                                                                                                   |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                              |
| Materials                       | aluminium                                                                                                                                                                                                            |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                          |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                 |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

## Codes

BZRC2808G15WBO  
BZRC2808G15WNE  
BZRC2808G15WOR

## PACKAGE

Package 01

## Certificazioni




## Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

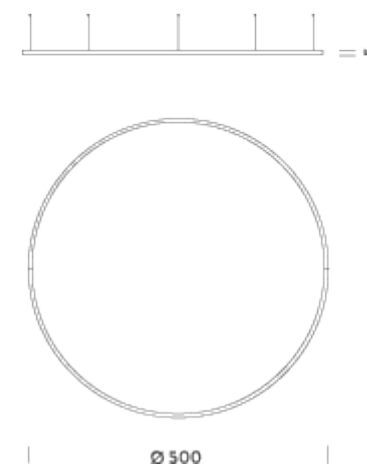

HOME Ø 0,85M | UP-DOWNLIGHT - 3000K - CASAMBI

LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

strip LED  
70W  
diffused orientable  
CASAMBI  
24V  
3000K  
4400lm  
63lm/W  
SDCM<3  
90  
40  
ø85x5cm  
aluminium  
0°C / +35°C  
25°C  
included: round canopy with 1 driver 75W  
(110/240V) | 1 dimmer CASAMBI | 1 electrical cable  
4m | 3x adjustable metal cables (length from 3m to  
0,5m) | ceiling attachment included | RAL 9005  
black, RAL 9016 white | Shipped assembled  
light configurations, separate light control, control  
systems  
3 kg

Customization options

Net lamp weight

Codes

BZRC3408G15WBO  
BZRC3408G15WNE  
BZRC3408G15WOR

PACKAGE

Package 01

Structure


white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

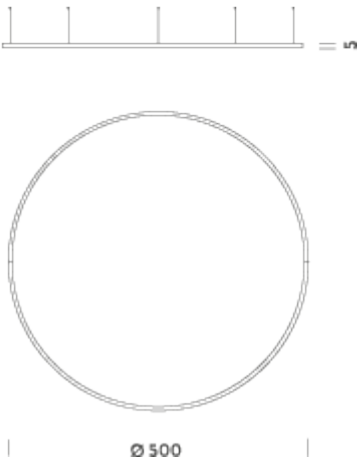

# HOME Ø 0,85M | DOWNLIGHT - 4000K - DALI

## LAMPING

|                                   |                                                               |
|-----------------------------------|---------------------------------------------------------------|
| Source                            | LED strip                                                     |
| Total power                       | 35W                                                           |
| Emission                          | diffused orientable                                           |
| Switching                         | DALI                                                          |
| Tension                           | 24V                                                           |
| Color temperature                 | 4000K                                                         |
| Luminous flux                     | 2360lm                                                        |
| Initial luminaire efficacy        | 67lm/W                                                        |
| Initial chromaticity              | SDCM<3                                                        |
| Typ CRI                           | 90                                                            |
| IP class                          | 40                                                            |
| Dimensions                        | ø85x5cm                                                       |
| Materials                         | aluminium                                                     |
| Ambient temperature range         | 0°C / +35°C                                                   |
| Performance ambient temperature   | 25°C                                                          |
| Mechanical impact protection code | light configurations, separate light control, control systems |

|                       |                                                                                                                                                                                                                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Notes                 | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer CASAMBI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included   RAL 9005 black   RAL 9016 white   shipped assembled optional accessories and custom features |
| Customization options |                                                                                                                                                                                                                                                                                       |
| Energy class          | D                                                                                                                                                                                                                                                                                     |
| Accessories           | Canopy, for concrete ceiling                                                                                                                                                                                                                                                          |
| Net lamp weight       | 3 kg                                                                                                                                                                                                                                                                                  |

## Codes

BZRC1608G15NBO  
BZRC1608G15NNE  
BZRC1608G15NOR

## Structure

white  
black  
gold

## PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg




## Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

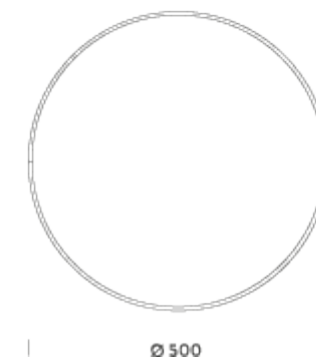

## HOME Ø 0,85M | DOWNLIGHT - 4000K - TRIAC

### LAMPING

|                                 |                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                            |
| Total power                     | 35W                                                                                                                                                                                                                  |
| Emission                        | diffused orientable                                                                                                                                                                                                  |
| Switching                       | TRIAC                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                  |
| Color temperature               | 4000K                                                                                                                                                                                                                |
| Luminous flux                   | 2360lm                                                                                                                                                                                                               |
| Initial luminaire efficacy      | 67lm/W                                                                                                                                                                                                               |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                               |
| Typ CRI                         | 90                                                                                                                                                                                                                   |
| IP class                        | 40                                                                                                                                                                                                                   |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                              |
| Materials                       | aluminium                                                                                                                                                                                                            |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                          |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                 |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

### Codes

BZRC2708G15NBO  
BZRC2708G15NNE  
BZRC2708G15NOR

### PACKAGE

Package 01

### Certificazioni




### Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

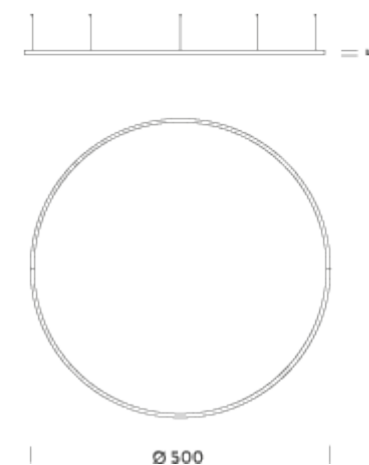

## HOME Ø 0,85M | DOWNLIGHT - 4000K - CASAMBI

### LAMPING

|                                 |                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                                               |
| Total power                     | 35W                                                                                                                                                                                                                                     |
| Emission                        | diffused orientable                                                                                                                                                                                                                     |
| Switching                       | CASAMBI                                                                                                                                                                                                                                 |
| Tension                         | 24V                                                                                                                                                                                                                                     |
| Color temperature               | 4000K                                                                                                                                                                                                                                   |
| Luminous flux                   | 2360lm                                                                                                                                                                                                                                  |
| Initial luminaire efficacy      | 67lm/W                                                                                                                                                                                                                                  |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                                  |
| Typ CRI                         | 90                                                                                                                                                                                                                                      |
| IP class                        | 40                                                                                                                                                                                                                                      |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                                                 |
| Materials                       | aluminium                                                                                                                                                                                                                               |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                             |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                                    |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 dimmer CASAMBI   1 electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

### Codes

BZRC3308G15NBO  
BZRC3308G15NNE  
BZRC3308G15NOR

### PACKAGE

Package 01

### Certificazioni



included: round canopy with 1 driver 75W (110/240V) | 1 dimmer CASAMBI | 1 electrical cable 4m | 3x adjustable metal cables (length from 3m to 0,5m) | ceiling attachment included | RAL 9005 black, RAL 9016 white | Shipped assembled

light configurations, separate light control, control systems


3 kg

### Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

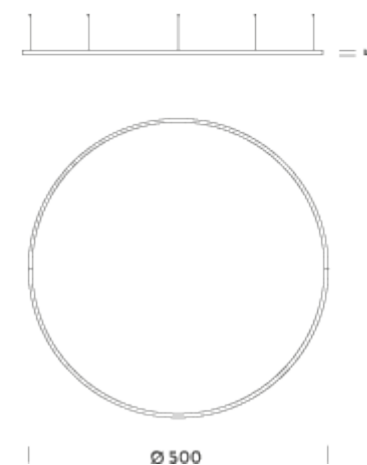

## HOME Ø 0,85M | UP-DOWNLIGHT - 4000K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                                  |
| Total power                     | 70W                                                                                                                                                                                                                                        |
| Emission                        | diffused orientable                                                                                                                                                                                                                        |
| Switching                       | DALI                                                                                                                                                                                                                                       |
| Tension                         | 24V                                                                                                                                                                                                                                        |
| Color temperature               | 4000K                                                                                                                                                                                                                                      |
| Luminous flux                   | 4720lm                                                                                                                                                                                                                                     |
| Initial luminaire efficacy      | 67lm/W                                                                                                                                                                                                                                     |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                                     |
| Typ CRI                         | 90                                                                                                                                                                                                                                         |
| IP class                        | 40                                                                                                                                                                                                                                         |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                                                    |
| Materials                       | aluminium                                                                                                                                                                                                                                  |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                                |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                                       |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included   RAL 9005 black   RAL 9016 white   shipped assembled |

### Customization options

|                 |                              |
|-----------------|------------------------------|
| Energy class    | D                            |
| Accessories     | Canopy, for concrete ceiling |
| Net lamp weight | 3 kg                         |

### Codes

BZRC1708G15NBO  
BZRC1708G15NNE  
BZRC1708G15NOR

### Structure

white  
black  
gold


### PACKAGE

|            |                                                 |
|------------|-------------------------------------------------|
| Package 01 | Dimension: 115x115x12 cm / Gross weight: 5,5 kg |
|------------|-------------------------------------------------|




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

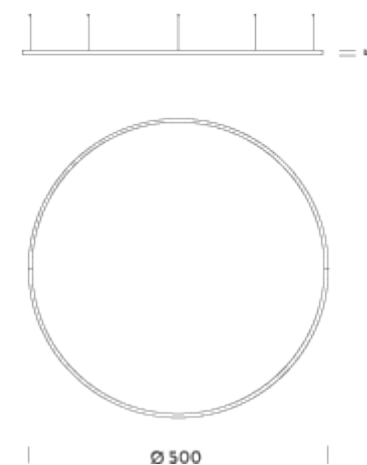

## HOME Ø 0,85M | UP-DOWNLIGHT - 4000K - TRIAC

### LAMPING

|                                 |                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                            |
| Total power                     | 70W                                                                                                                                                                                                                  |
| Emission                        | diffused orientable                                                                                                                                                                                                  |
| Switching                       | TRIAC                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                  |
| Color temperature               | 4000K                                                                                                                                                                                                                |
| Luminous flux                   | 4720lm                                                                                                                                                                                                               |
| Initial luminaire efficacy      | 67lm/W                                                                                                                                                                                                               |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                               |
| Typ CRI                         | 90                                                                                                                                                                                                                   |
| IP class                        | 40                                                                                                                                                                                                                   |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                              |
| Materials                       | aluminium                                                                                                                                                                                                            |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                          |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                 |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

### Codes

BZRC2808G15NBO  
BZRC2808G15NNE  
BZRC2808G15NOR

### PACKAGE

Package 01

### Certificazioni




### Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

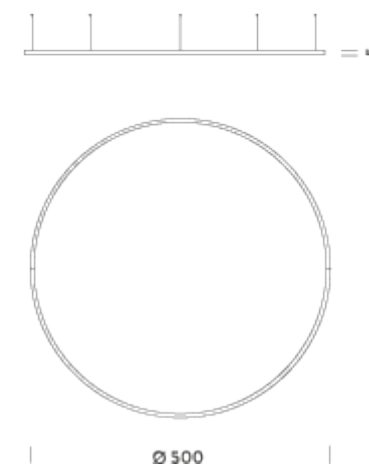

## HOME Ø 0,85M | UP-DOWNLIGHT - 4000K - CASAMBI

### LAMPING

|                                 |                                                                                                                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                                               |
| Total power                     | 70W                                                                                                                                                                                                                                     |
| Emission                        | diffused orientable                                                                                                                                                                                                                     |
| Switching                       | CASAMBI                                                                                                                                                                                                                                 |
| Tension                         | 24V                                                                                                                                                                                                                                     |
| Color temperature               | 4000K                                                                                                                                                                                                                                   |
| Luminous flux                   | 4720lm                                                                                                                                                                                                                                  |
| Initial luminaire efficacy      | 67lm/W                                                                                                                                                                                                                                  |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                                  |
| Typ CRI                         | 90                                                                                                                                                                                                                                      |
| IP class                        | 40                                                                                                                                                                                                                                      |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                                                 |
| Materials                       | aluminium                                                                                                                                                                                                                               |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                             |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                                    |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 dimmer CASAMBI   1 electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

### Codes

BZRC3408G15NBO  
BZRC3408G15NNE  
BZRC3408G15NOR

### PACKAGE

Package 01

### Certificazioni



included: round canopy with 1 driver 75W (110/240V) | 1 dimmer CASAMBI | 1 electrical cable 4m | 3x adjustable metal cables (length from 3m to 0,5m) | ceiling attachment included | RAL 9005 black, RAL 9016 white | Shipped assembled

light configurations, separate light control, control systems


3 kg

### Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

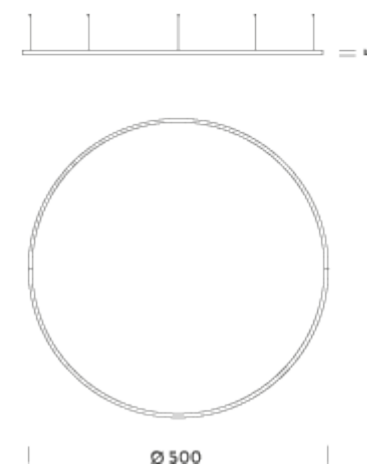

# HOME Ø 1M | DOWNLIGHT - 2700K - DALI

## LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

LED strip  
45W  
Diffused orientable  
DALI  
24V  
2700K  
2616lm  
58lm/W  
SDCM<3  
90  
40  
Ø100x5cm  
aluminium  
0°C / +35°C  
25°C

included: round canopy with 1 x driver 75W  
(110/240V) | 1 x dimmer DALI | 1 x electrical cable  
4m | 3 x adjustable metal cable (length from 3m to  
0,5m) ceiling attachment | RAL 9005 black | RAL  
9016 white | shipped assembled

Customization options

light configurations, separate light control, control  
systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Ceiling attachment,  
for metal cable | Ceiling plate, for false ceiling

Net lamp weight

3 kg

## Codes

BZRC1610G15DBO  
BZRC1610G15DNE  
BZRC1610G15DOR

## Structure

white  
black  
gold

## PACKAGE

Package 01





Dimension: 115x115x12 cm / Gross weight: 5,5 kg

## Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

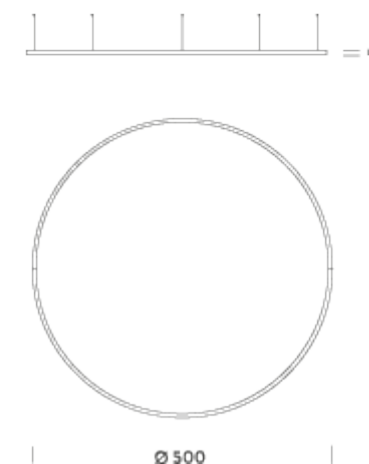

## HOME Ø 1M | DOWNLIGHT - 2700K - TRIAC

### LAMPING

|                                 |                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                            |
| Total power                     | 45W                                                                                                                                                                                                                  |
| Emission                        | diffused orientable                                                                                                                                                                                                  |
| Switching                       | TRIAC                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                  |
| Color temperature               | 2700K                                                                                                                                                                                                                |
| Luminous flux                   | 2616lm                                                                                                                                                                                                               |
| Initial luminaire efficacy      | 68lm/W                                                                                                                                                                                                               |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                               |
| Typ CRI                         | 90                                                                                                                                                                                                                   |
| IP class                        | 40                                                                                                                                                                                                                   |
| Dimensions                      | Ø100x5cm                                                                                                                                                                                                             |
| Materials                       | aluminium                                                                                                                                                                                                            |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                          |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                 |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

### Codes

BZRC2710G15DBO  
BZRC2710G15DNE  
BZRC2710G15DOR

### PACKAGE

Package 01

### Certificazioni




|                                                               |
|---------------------------------------------------------------|
| light configurations, separate light control, control systems |
| 3 kg                                                          |

### Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

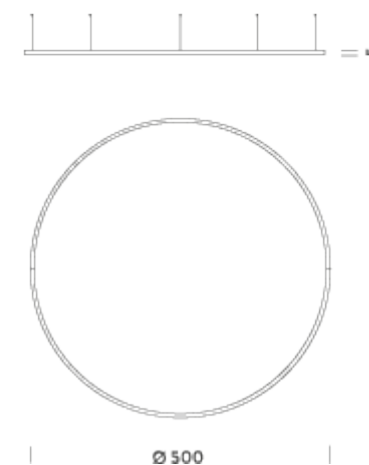

## HOME Ø 1M | DOWNLIGHT - 2700K - CASAMBI

### LAMPING

|                                 |                                                                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                                                |
| Total power                     | 45W                                                                                                                                                                                                                                      |
| Emission                        | diffused orientable                                                                                                                                                                                                                      |
| Switching                       | CASAMBI                                                                                                                                                                                                                                  |
| Tension                         | 24V                                                                                                                                                                                                                                      |
| Color temperature               | 2700K                                                                                                                                                                                                                                    |
| Luminous flux                   | 2616lm                                                                                                                                                                                                                                   |
| Initial luminaire efficacy      | 58lm/W                                                                                                                                                                                                                                   |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                                   |
| Typ CRI                         | 90                                                                                                                                                                                                                                       |
| IP class                        | 40                                                                                                                                                                                                                                       |
| Dimensions                      | Ø100x5cm                                                                                                                                                                                                                                 |
| Materials                       | aluminium                                                                                                                                                                                                                                |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                              |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                                     |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 dimmer CASAMBI   1x electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

### Codes

BZRC3310G15DBO  
BZRC3310G15DNE  
BZRC3310G15DOR

### PACKAGE

Package 01

### Certificazioni




|                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| strip LED                                                                                                                                                                                                                                |
| 45W                                                                                                                                                                                                                                      |
| diffused orientable                                                                                                                                                                                                                      |
| CASAMBI                                                                                                                                                                                                                                  |
| 24V                                                                                                                                                                                                                                      |
| 2700K                                                                                                                                                                                                                                    |
| 2616lm                                                                                                                                                                                                                                   |
| 58lm/W                                                                                                                                                                                                                                   |
| SDCM<3                                                                                                                                                                                                                                   |
| 90                                                                                                                                                                                                                                       |
| 40                                                                                                                                                                                                                                       |
| Ø100x5cm                                                                                                                                                                                                                                 |
| aluminium                                                                                                                                                                                                                                |
| 0°C / +35°C                                                                                                                                                                                                                              |
| 25°C                                                                                                                                                                                                                                     |
| included: round canopy with 1 driver 75W (110/240V)   1 dimmer CASAMBI   1x electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |
| light configurations, separate light control, control systems                                                                                                                                                                            |
| 3 kg                                                                                                                                                                                                                                     |

### Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

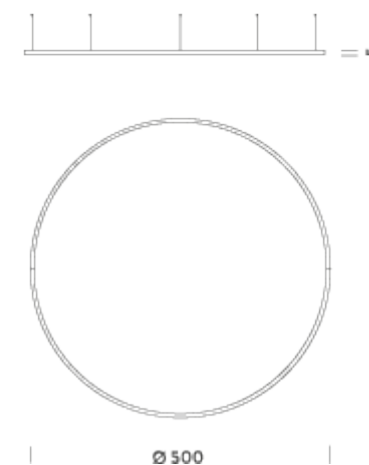

# HOME Ø 1M | UP-DOWNLIGHT - 2700K - DALI

## LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

LED strip  
90W  
Diffused orientable  
DALI  
24V  
2700K  
5231lm  
58lm/W  
SDCM<3  
90  
40  
Ø100x5cm  
aluminium  
0°C / +35°C  
25°C  
included: round canopy with 1 x driver 100W (110-240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

Light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Ceiling attachment, for metal cable | Ceiling plate, for false ceiling

Net lamp weight

4 kg

## Codes

BZRC1710G15DBO  
BZRC1710G15DNE  
BZRC1710G15DOR

## Structure

white  
black  
gold

## PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg




## Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

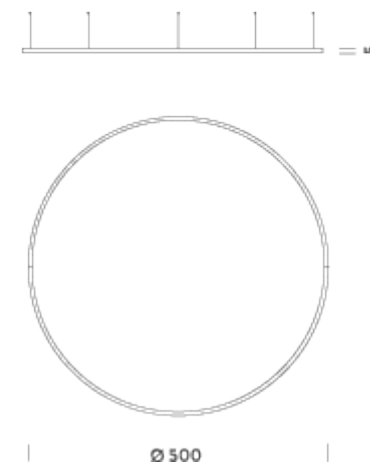

## HOME Ø 1M | UP-DOWNLIGHT - 2700K - TRIAC

### LAMPING

|                                 |                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                            |
| Total power                     | 90W                                                                                                                                                                                                                  |
| Emission                        | diffused orientable                                                                                                                                                                                                  |
| Switching                       | TRIAC                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                  |
| Color temperature               | 2700K                                                                                                                                                                                                                |
| Luminous flux                   | 5231lm                                                                                                                                                                                                               |
| Initial luminaire efficacy      | 58lm/W                                                                                                                                                                                                               |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                               |
| Typ CRI                         | 90                                                                                                                                                                                                                   |
| IP class                        | 40                                                                                                                                                                                                                   |
| Dimensions                      | Ø100x5cm                                                                                                                                                                                                             |
| Materials                       | aluminium                                                                                                                                                                                                            |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                          |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                 |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

### Codes

BZRC2810G15DBO  
BZRC2810G15DNE  
BZRC2810G15DOR

### PACKAGE

Package 01

### Certificazioni




### Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

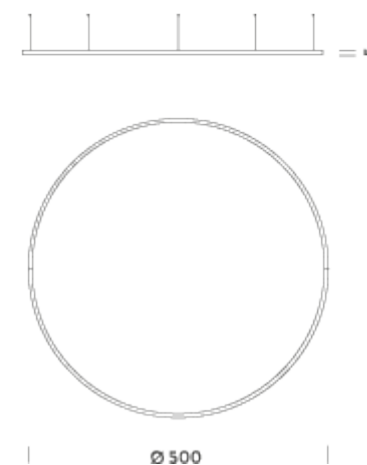

# HOME Ø 1M | UP-DOWNLIGHT - 2700K - CASAMBI

## LAMPING

|                                 |                                                                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                                                 |
| Total power                     | 90W                                                                                                                                                                                                                                       |
| Emission                        | diffused orientable                                                                                                                                                                                                                       |
| Switching                       | CASAMBI                                                                                                                                                                                                                                   |
| Tension                         | 24V                                                                                                                                                                                                                                       |
| Color temperature               | 2700K                                                                                                                                                                                                                                     |
| Luminous flux                   | 5231lm                                                                                                                                                                                                                                    |
| Initial luminaire efficacy      | 58lm/W                                                                                                                                                                                                                                    |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                                    |
| Typ CRI                         | 90                                                                                                                                                                                                                                        |
| IP class                        | 40                                                                                                                                                                                                                                        |
| Dimensions                      | Ø100x5cm                                                                                                                                                                                                                                  |
| Materials                       | aluminium                                                                                                                                                                                                                                 |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                               |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                                      |
| Notes                           | included: round canopy with 1 driver 100W (110/240V)   1 dimmer CASAMBI   1x electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

## Codes

BZRC3410G15DBO  
BZRC3410G15DNE  
BZRC3410G15DOR

## PACKAGE

Package 01

## Certificazioni




## Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

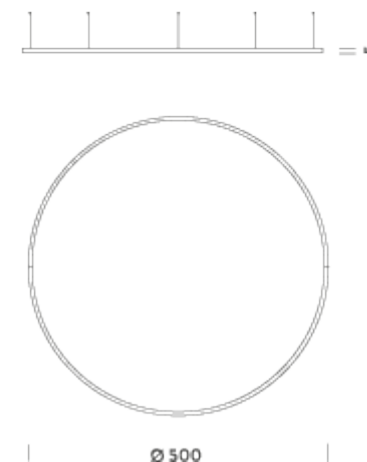

# HOME Ø 1M | DOWNLIGHT - 3000K - DALI

## LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

LED strip  
45W  
Diffused orientable  
DALI  
24V  
3000K  
2769lm  
62lm/W  
SDCM<3  
90  
40  
Ø100x5cm  
aluminium  
0°C / +35°C  
25°C

included: round canopy with 1 x driver 75W (110/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

Light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Ceiling attachment, for metal cable | Ceiling plate, for false ceiling

Net lamp weight

3 kg

## Codes

BZRC1610G15WBO  
BZRC1610G15WNE  
BZRC1610G15WOR

## Structure

white  
black  
gold

## PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg




## Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

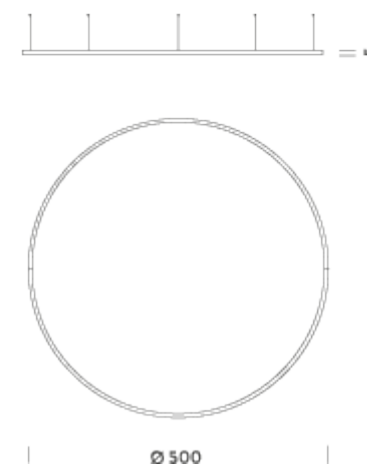

## HOME Ø 1M | DOWNLIGHT - 3000K - TRIAC

### LAMPING

|                                 |                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                            |
| Total power                     | 45W                                                                                                                                                                                                                  |
| Emission                        | diffused orientable                                                                                                                                                                                                  |
| Switching                       | TRIAC                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                  |
| Color temperature               | 3000K                                                                                                                                                                                                                |
| Luminous flux                   | 2769lm                                                                                                                                                                                                               |
| Initial luminaire efficacy      | 62lm/W                                                                                                                                                                                                               |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                               |
| Typ CRI                         | 90                                                                                                                                                                                                                   |
| IP class                        | 40                                                                                                                                                                                                                   |
| Dimensions                      | Ø100x5cm                                                                                                                                                                                                             |
| Materials                       | aluminium                                                                                                                                                                                                            |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                          |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                 |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

### Codes

BZRC2710G15WBO  
BZRC2710G15WNE  
BZRC2710G15WOR

### PACKAGE

Package 01

### Certificazioni




|                                                                                                                                                                                                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| strip LED                                                                                                                                                                                                            |
| 45W                                                                                                                                                                                                                  |
| diffused orientable                                                                                                                                                                                                  |
| TRIAC                                                                                                                                                                                                                |
| 24V                                                                                                                                                                                                                  |
| 3000K                                                                                                                                                                                                                |
| 2769lm                                                                                                                                                                                                               |
| 62lm/W                                                                                                                                                                                                               |
| SDCM<3                                                                                                                                                                                                               |
| 90                                                                                                                                                                                                                   |
| 40                                                                                                                                                                                                                   |
| Ø100x5cm                                                                                                                                                                                                             |
| aluminium                                                                                                                                                                                                            |
| 0°C / +35°C                                                                                                                                                                                                          |
| 25°C                                                                                                                                                                                                                 |
| included: round canopy with 1 driver 75W (110/240V)   1 electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |
| Light configurations, separate light control, control systems                                                                                                                                                        |
| 3 kg                                                                                                                                                                                                                 |

### Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

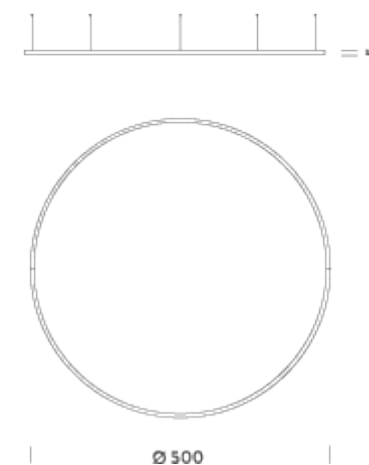

## HOME Ø 1M | DOWNLIGHT - 3000K - CASAMBI

### LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

strip LED  
45W  
diffused orientable  
CASAMBI  
24V  
3000K  
2769lm  
62lm/W  
SDCM<3  
90  
40  
Ø100x5cm  
aluminium  
0°C / +35°C  
25°C

included: round canopy with 1 driver 75W  
(110/240V) | 1 dimmer CASAMBI | 1x electrical  
cable 4m | 3x adjustable metal cables (length from  
3m to 0,5m) | ceiling attachment included | RAL  
9005 black, RAL 9016 white | Shipped assembled

Customization options

Light configurations, separate light control, control  
systems

Net lamp weight

3 kg

### Codes

BZRC3310G15WBO  
BZRC3310G15WNE  
BZRC3310G15WOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

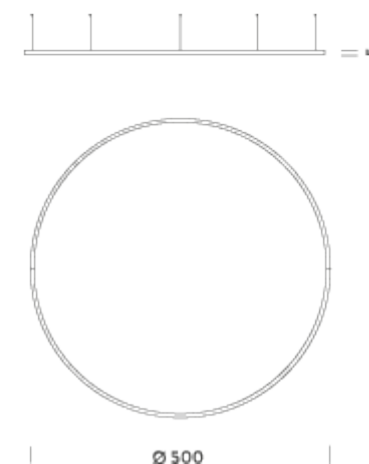

# HOME Ø 1M | UP-DOWNLIGHT - 3000K - DALI

## LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

LED strip  
90W  
Diffused orientable  
DALI  
24V

3000K  
5539lm  
62lm/W  
SDCM<3  
90  
40  
ø100x5cm  
aluminium  
0°C / +35°C  
25°C

included: round canopy with 1 x driver 100W (110-240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

Light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Ceiling attachment, for metal cable | Ceiling plate, for false ceiling

Net lamp weight

4 kg

## Codes

BZRC1710G15WBO  
BZRC1710G15WNE  
BZRC1710G15WOR

## Structure

white  
black  
gold

## PACKAGE

Package 01





Dimension: 115x115x12 cm / Gross weight: 6,5 kg

## Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

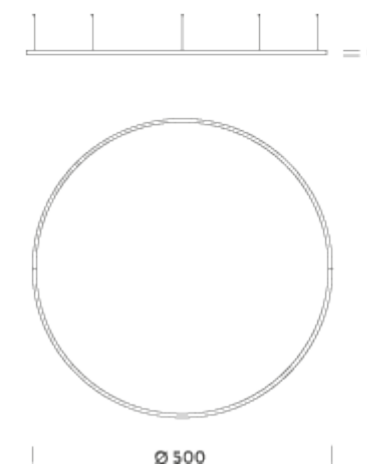

## HOME Ø 1M | UP-DOWNLIGHT - 3000K - TRIAC

### LAMPING

|                                 |                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                            |
| Total power                     | 90W                                                                                                                                                                                                                  |
| Emission                        | diffused orientable                                                                                                                                                                                                  |
| Switching                       | TRIAC                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                  |
| Color temperature               | 3000K                                                                                                                                                                                                                |
| Luminous flux                   | 5539lm                                                                                                                                                                                                               |
| Initial luminaire efficacy      | 62lm/W                                                                                                                                                                                                               |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                               |
| Typ CRI                         | 90                                                                                                                                                                                                                   |
| IP class                        | 40                                                                                                                                                                                                                   |
| Dimensions                      | Ø100x5cm                                                                                                                                                                                                             |
| Materials                       | aluminium                                                                                                                                                                                                            |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                          |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                 |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

### Codes

BZRC2810G15WBO  
BZRC2810G15WNE  
BZRC2810G15WOR

### PACKAGE

Package 01

### Certificazioni




### Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

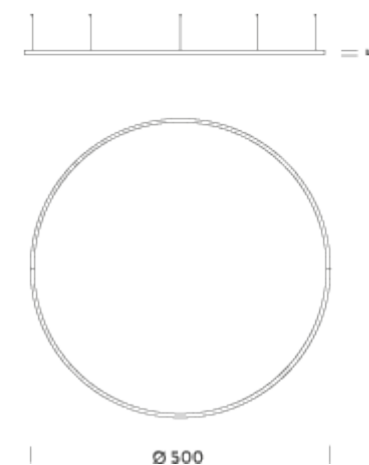

# HOME Ø 1M | UP-DOWNLIGHT - 3000K - CASAMBI

## LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

strip LED  
90W  
diffused orientable  
CASAMBI  
24V  
3000K  
5539lm  
62lm/W  
SDCM<3  
90  
40  
Ø100x5cm  
aluminium  
0°C / +35°C  
25°C

included: round canopy with 1 driver 100W  
(110/240V) | 1 dimmer CASAMBI | 1x electrical  
cable 4m | 3x adjustable metal cables (length from  
3m to 0,5m) | ceiling attachment included | RAL  
9005 black, RAL 9016 white | Shipped assembled

Customization options

Light configurations, separate light control, control  
systems

Net lamp weight

4 kg

## Codes

BZRC3410G15WBO  
BZRC3410G15WNE  
BZRC3410G15WOR

## Structure

white  
black  
gold

## PACKAGE

Package 01





Dimension: 115x115x12 cm / Gross weight: 6,5 kg

## Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

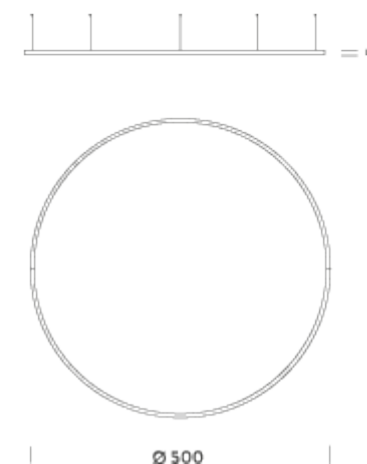

# HOME Ø 1M | DOWNLIGHT - 4000K - DALI

## LAMPING

|                                 |                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                        |
| Total power                     | 45W                                                                                                                                                                                                                              |
| Emission                        | Diffused orientable                                                                                                                                                                                                              |
| Switching                       | DALI                                                                                                                                                                                                                             |
| Tension                         | 24V                                                                                                                                                                                                                              |
| Color temperature               | 4000K                                                                                                                                                                                                                            |
| Luminous flux                   | 3077lm                                                                                                                                                                                                                           |
| Initial luminaire efficacy      | 68lm/W                                                                                                                                                                                                                           |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                           |
| Typ CRI                         | 90                                                                                                                                                                                                                               |
| IP class                        | 40                                                                                                                                                                                                                               |
| Dimensions                      | Ø100x5cm                                                                                                                                                                                                                         |
| Materials                       | aluminium                                                                                                                                                                                                                        |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                      |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                             |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |

## Customization options

### Energy class

### Accessories

### Net lamp weight

## Codes

BZRC1610G15NBO

BZRC1610G15NNE

BZRC1610G15NOR

## PACKAGE

Package 01

Light configurations, separate light control, control systems

D

Canopy, for concrete ceiling | Ceiling attachment, for metal cable | Ceiling plate, for false ceiling

3 kg

## Structure


white

black




gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

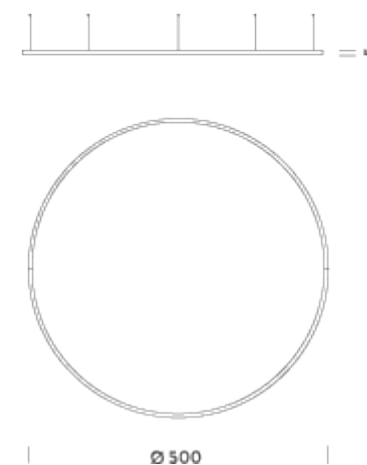

## HOME Ø 1M | DOWNLIGHT - 4000K - TRIAC

### LAMPING

|                                 |                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                            |
| Total power                     | 45W                                                                                                                                                                                                                  |
| Emission                        | diffused orientable                                                                                                                                                                                                  |
| Switching                       | TRIAC                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                  |
| Color temperature               | 4000K                                                                                                                                                                                                                |
| Luminous flux                   | 3077lm                                                                                                                                                                                                               |
| Initial luminaire efficacy      | 68lm/W                                                                                                                                                                                                               |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                               |
| Typ CRI                         | 90                                                                                                                                                                                                                   |
| IP class                        | 40                                                                                                                                                                                                                   |
| Dimensions                      | Ø100x5cm                                                                                                                                                                                                             |
| Materials                       | aluminium                                                                                                                                                                                                            |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                          |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                 |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

### Codes

BZRC2710G15NBO  
BZRC2710G15NNE  
BZRC2710G15NOR

### PACKAGE

Package 01

### Certificazioni




### Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

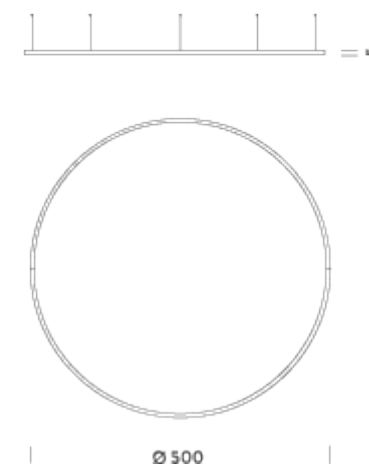

## HOME Ø 1M | DOWNLIGHT - 4000K - CASAMBI

### LAMPING

|                                 |                                                                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                                                |
| Total power                     | 45W                                                                                                                                                                                                                                      |
| Emission                        | diffused orientable                                                                                                                                                                                                                      |
| Switching                       | CASAMBI                                                                                                                                                                                                                                  |
| Tension                         | 24V                                                                                                                                                                                                                                      |
| Color temperature               | 4000K                                                                                                                                                                                                                                    |
| Luminous flux                   | 3077lm                                                                                                                                                                                                                                   |
| Initial luminaire efficacy      | 68lm/W                                                                                                                                                                                                                                   |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                                   |
| Typ CRI                         | 90                                                                                                                                                                                                                                       |
| IP class                        | 40                                                                                                                                                                                                                                       |
| Dimensions                      | Ø100x5cm                                                                                                                                                                                                                                 |
| Materials                       | aluminium                                                                                                                                                                                                                                |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                              |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                                     |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 dimmer CASAMBI   1x electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

Light configurations, separate light control, control systems

3 kg

### Codes

BZRC3310G15NBO  
BZRC3310G15NNE  
BZRC3310G15NOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

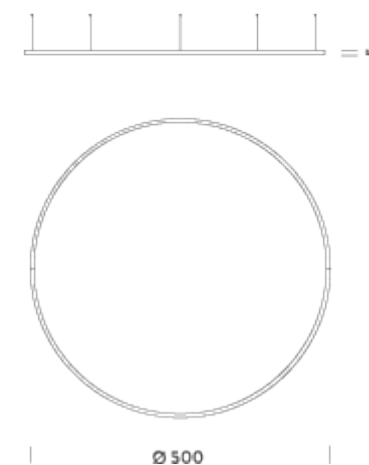

# HOME Ø 1M | UP-DOWNLIGHT - 4000K - DALI

## LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

LED strip  
90W  
Diffused orientable  
DALI  
24V  
4000K  
6154lm  
68lm/W  
SDCM<3  
90  
40  
Ø100x5cm  
aluminium  
0°C / +35°C  
25°C  
included: round canopy with 1 x driver 100W (110-240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

Light configurations, separate light control, control systems

Energy class

D

Accessories

Canopy, for concrete ceiling | Ceiling attachment, for metal cable | Ceiling plate, for false ceiling

Net lamp weight

4 kg

## Codes

BZRC1710G15NBO  
BZRC1710G15NNE  
BZRC1710G15NOR

## Structure

white  
black  
gold

## PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg




## Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

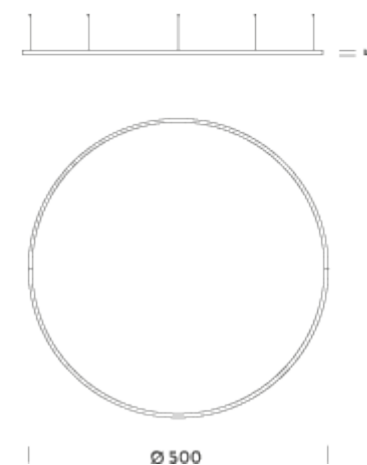

## HOME Ø 1M | UP-DOWNLIGHT - 4000K - TRIAC

### LAMPING

|                                 |                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                            |
| Total power                     | 90W                                                                                                                                                                                                                  |
| Emission                        | diffused orientable                                                                                                                                                                                                  |
| Switching                       | TRIAC                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                  |
| Color temperature               | 4000K                                                                                                                                                                                                                |
| Luminous flux                   | 6154lm                                                                                                                                                                                                               |
| Initial luminaire efficacy      | 68lm/W                                                                                                                                                                                                               |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                               |
| Typ CRI                         | 90                                                                                                                                                                                                                   |
| IP class                        | 40                                                                                                                                                                                                                   |
| Dimensions                      | Ø100x5cm                                                                                                                                                                                                             |
| Materials                       | aluminium                                                                                                                                                                                                            |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                          |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                 |
| Notes                           | included: round canopy with 1 driver 75W (110/240V)   1 electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

### Codes

BZRC2810G15NBO  
BZRC2810G15NNE  
BZRC2810G15NOR

### PACKAGE

Package 01

### Certificazioni



included: round canopy with 1 driver 75W (110/240V) | 1 electrical cable 4m | 3x adjustable metal cables (length from 3m to 0,5m) | ceiling attachment included | RAL 9005 black, RAL 9016 white | Shipped assembled

Light configurations, separate light control, control systems


4 kg

### Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

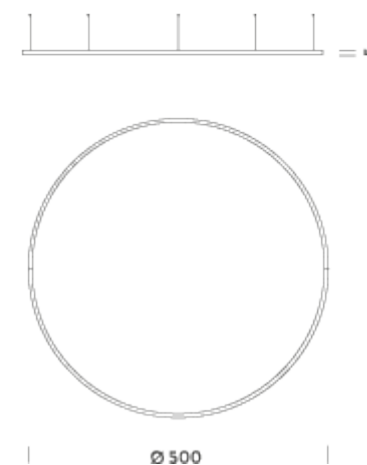

# HOME Ø 1M | UP-DOWNLIGHT - 4000K - CASAMBI

## LAMPING

|                                 |                                                                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | strip LED                                                                                                                                                                                                                                 |
| Total power                     | 90W                                                                                                                                                                                                                                       |
| Emission                        | diffused orientable                                                                                                                                                                                                                       |
| Switching                       | CASAMBI                                                                                                                                                                                                                                   |
| Tension                         | 24V                                                                                                                                                                                                                                       |
| Color temperature               | 4000K                                                                                                                                                                                                                                     |
| Luminous flux                   | 6154lm                                                                                                                                                                                                                                    |
| Initial luminaire efficacy      | 68lm/W                                                                                                                                                                                                                                    |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                                    |
| Typ CRI                         | 90                                                                                                                                                                                                                                        |
| IP class                        | 40                                                                                                                                                                                                                                        |
| Dimensions                      | Ø100x5cm                                                                                                                                                                                                                                  |
| Materials                       | aluminium                                                                                                                                                                                                                                 |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                               |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                                      |
| Notes                           | included: round canopy with 1 driver 100W (110/240V)   1 dimmer CASAMBI   1x electrical cable 4m   3x adjustable metal cables (length from 3m to 0,5m)   ceiling attachment included   RAL 9005 black, RAL 9016 white   Shipped assembled |

Customization options

Net lamp weight

## Codes

BZRC3410G15NBO  
BZRC3410G15NNE  
BZRC3410G15NOR

## PACKAGE

Package 01

## Certificazioni




## Structure




white  
black  
gold

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

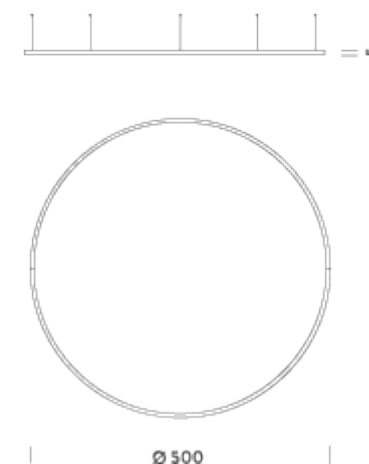

## HOME Ø 1,5M | DOWNLIGHT - 2700K - DALI

### LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

LED strip  
68W  
Diffused orientable  
DALI  
24V  
2700K  
3923lm  
57lm/W  
SDCM<3  
90  
40  
Ø150x5cm  
aluminium  
0°C / +35°C  
25°C

included: round canopy with 1 x driver 75W  
(110/24V) | 1 x dimmer DALI | 1 x electrical cable  
4m | 3 x adjustable metal cable (length from 3m to  
0,5m) ceiling attachment | RAL 9005 black | RAL  
9016 white | shipped assembled

Customization options

light configurations, separate light control, control  
systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Ceiling attachment,  
for metal cable | Ceiling plate, for false ceiling

Net lamp weight

4 kg

### Codes

BZRC1615G15DBO  
BZRC1615G15DNE  
BZRC1615G15DOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 165x165x12 cm / Gross weight: 7,9 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

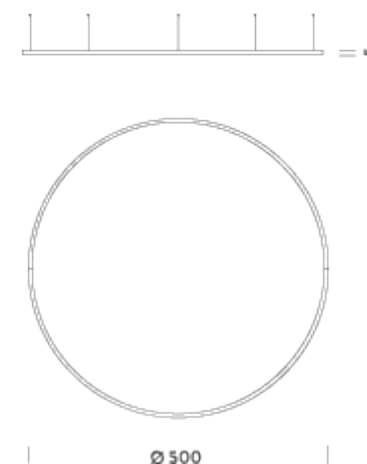

# HOME Ø 1,5M | UP-DOWNLIGHT - 2700K

## LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

LED strip  
136W  
Diffused orientable  
DALI  
24V  
2700K  
7847lm  
58lm/W  
SDCM<3  
90  
40  
Ø150x5cm  
aluminium  
0°C / +35°C  
25°C

included: round canopy with 1 x driver 150W (220/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Ceiling attachment, for metal cable | Ceiling plate, for false ceiling

Net lamp weight

5,4 kg

## Codes

BZRC1715G15DBO  
BZRC1715G15DNE  
BZRC1715G15DOR

## Structure

white  
black  
gold

## PACKAGE


Package 01

Dimension: 165x165x12 cm / Gross weight: 8,9 kg




## Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

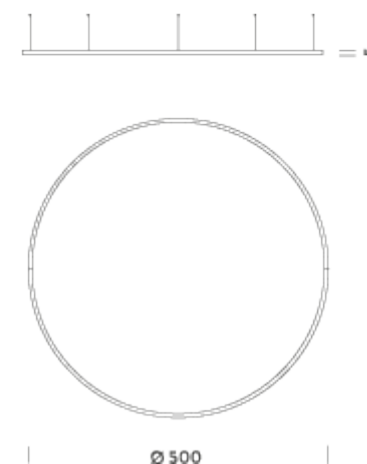

## HOME Ø 1,5M | DOWNLIGHT - 3000K - DALI

### LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

LED strip  
68W  
Diffused orientable  
DALI  
24V  
3000K  
4154lm  
61lm/W  
SDCM<3  
90  
40  
Ø150x5cm  
aluminium  
0°C / +35°C  
25°C

included: round canopy with 1 x driver 75W (110/24V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Ceiling attachment, for metal cable | Ceiling plate, for false ceiling

Net lamp weight

4 kg

### Codes

BZRC1615G15WBO  
BZRC1615G15WNE  
BZRC1615G15WOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 165x165x12 cm / Gross weight: 7,9 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

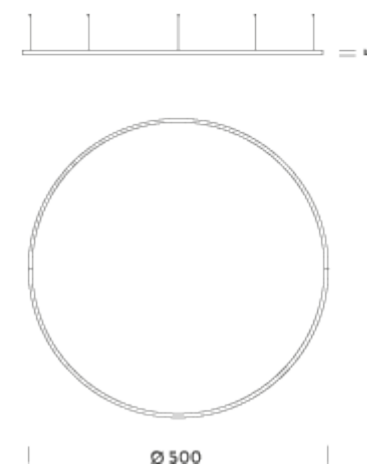

# HOME Ø 1,5M | UP-DOWNLIGHT - 3000K - DALI

## LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

LED strip  
136W  
Diffused orientable  
DALI  
24V  
3000K  
8308lm  
61lm/W  
SDCM<3  
90  
40  
Ø150x5cm  
aluminium  
0°C / +35°C  
25°C

included: round canopy with 1 x driver 150W (220/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

light configurations, separate light control, control systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Ceiling attachment, for metal cable | Ceiling plate, for false ceiling

Net lamp weight

5,4 kg

## Codes

BZRC1715G15WBO  
BZRC1715G15WNE  
BZRC1715G15WOR

## Structure

white  
black  
gold

## PACKAGE


Package 01

Dimension: 165x165x12 cm / Gross weight: 8,9 kg




## Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

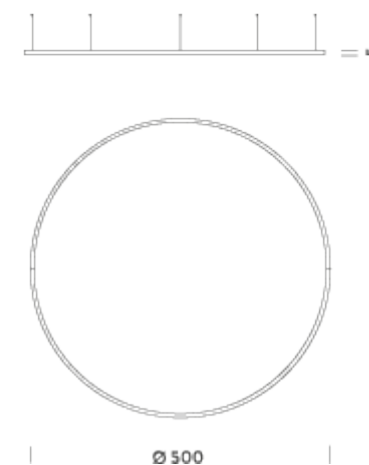

## HOME Ø 1,5M | DOWNLIGHT - 4000K - DALI

### LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

LED strip  
68W  
Diffused orientable  
DALI  
24V  
4000K  
4616lm  
68lm/W  
SDCM<3  
90  
40  
Ø150x5cm  
aluminium  
0°C / +35°C  
25°C

included: round canopy with 1 x driver 75W  
(110/24V) | 1 x dimmer DALI | 1 x electrical cable  
4m | 3 x adjustable metal cable (length from 3m to  
0,5m) ceiling attachment | RAL 9005 black | RAL  
9016 white | shipped assembled

Customization options

light configurations, separate light control, control  
systems

Energy class

D

Accessories

Canopy, for concrete ceiling | Ceiling attachment,  
for metal cable | Ceiling plate, for false ceiling

Net lamp weight

4 kg

### Codes

BZRC1615G15NBO  
BZRC1615G15NNE  
BZRC1615G15NOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 165x165x12 cm / Gross weight: 7,9 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

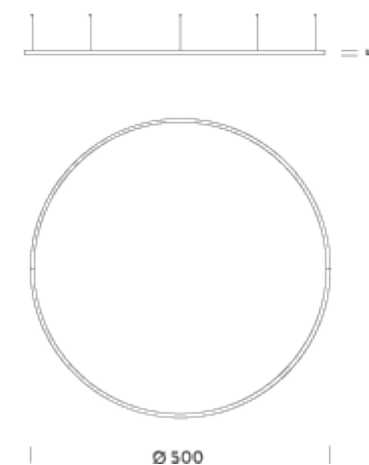

# HOME Ø 1,5M | UP-DOWNLIGHT - 4000K - DALI

## LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

LED strip  
136W  
Diffused orientable  
DALI  
24V  
4000K  
9232lm  
68lm/W  
SDCM<3  
90  
40  
Ø150x5cm  
aluminium  
0°C / +35°C  
25°C

included: round canopy with 1 x driver 150W (220/240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

light configurations, separate light control, control systems

Energy class

D

Accessories

Canopy, for concrete ceiling | Ceiling attachment, for metal cable | Ceiling plate, for false ceiling

Net lamp weight

5,4 kg

## Codes

BZRC1715G15NBO  
BZRC1715G15NNE  
BZRC1715G15NOR

## Structure

white  
black  
gold

## PACKAGE


Package 01

Dimension: 165x165x12 cm / Gross weight: 8,9 kg




## Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

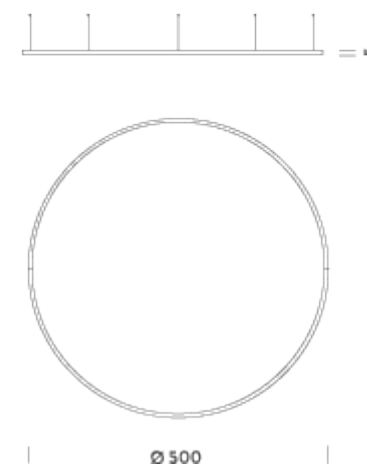

## Ø 2M | DOWNLIGHT - 2700K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                           |
| Total power                     | 90W                                                                                                                                                                                                                 |
| Emission                        | Diffused orientable                                                                                                                                                                                                 |
| Switching                       | DALI                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                 |
| Color temperature               | 2700K                                                                                                                                                                                                               |
| Luminous flux                   | 5260lm                                                                                                                                                                                                              |
| Initial luminaire efficacy      | 58lm/W                                                                                                                                                                                                              |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                              |
| Typ CRI                         | 90                                                                                                                                                                                                                  |
| IP class                        | 40                                                                                                                                                                                                                  |
| Dimensions                      | ø200x5cm                                                                                                                                                                                                            |
| Materials                       | aluminium                                                                                                                                                                                                           |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                |
| Notes                           | included: 1 x driver 100W (110/240V)   1 x dimmer DALI   1 x electrical cable 5m   4 x adjustable metal cable length 3m, ceiling attachment   remote driver   RAL 9005 black   RAL 9016 white   shipped in 2 pieces |

### Customization options

light configurations, separate light control, control systems

### Energy class

E

### Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

### Net lamp weight

7 kg

### Codes

BZRC1620G15DBO  
BZRC1620G15DNE  
BZRC1620G15DOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 210x110x15 cm / Gross weight: 12,4 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

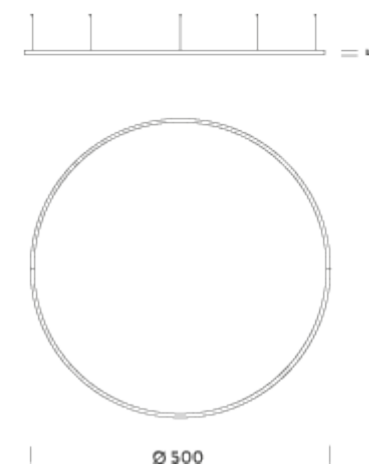

## Ø 2M | UP-DOWNLIGHT - 2700K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                           |
| Total power                     | 180W                                                                                                                                                                                                                |
| Emission                        | Diffused orientable                                                                                                                                                                                                 |
| Switching                       | DALI                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                 |
| Color temperature               | 2700K                                                                                                                                                                                                               |
| Luminous flux                   | 10500lm                                                                                                                                                                                                             |
| Initial luminaire efficacy      | 58lm/W                                                                                                                                                                                                              |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                              |
| Typ CRI                         | 90                                                                                                                                                                                                                  |
| IP class                        | 40                                                                                                                                                                                                                  |
| Dimensions                      | ø200x5cm                                                                                                                                                                                                            |
| Materials                       | aluminium                                                                                                                                                                                                           |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                |
| Notes                           | included: 1 x driver 250W (220/240V)   1 x dimmer DALI   2 x electrical cable 5m   4 x adjustable metal cable length 3m, ceiling attachment   remote driver   RAL 9005 black   RAL 9016 white   shipped in 2 pieces |

### Customization options

light configurations, separate light control, control systems

### Energy class

E

### Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

### Net lamp weight

7,2 kg

### Codes

BZRC1720G15DBO  
BZRC1720G15DNE  
BZRC1720G15DOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 210x110x15 cm / Gross weight: 12,6 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

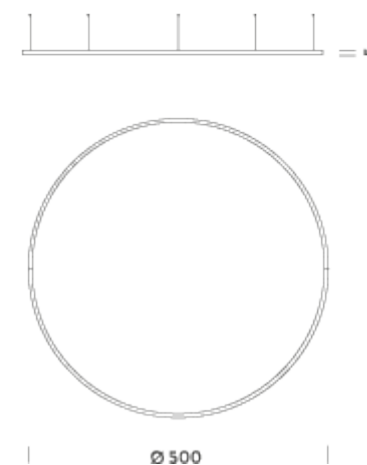

## Ø 2M | DOWNLIGHT - 3000K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                           |
| Total power                     | 90W                                                                                                                                                                                                                 |
| Emission                        | Diffused orientable                                                                                                                                                                                                 |
| Switching                       | DALI                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                 |
| Color temperature               | 3000K                                                                                                                                                                                                               |
| Luminous flux                   | 5539lm                                                                                                                                                                                                              |
| Initial luminaire efficacy      | 62lm/W                                                                                                                                                                                                              |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                              |
| Typ CRI                         | 90                                                                                                                                                                                                                  |
| IP class                        | 40                                                                                                                                                                                                                  |
| Dimensions                      | ø200x5cm                                                                                                                                                                                                            |
| Materials                       | aluminium                                                                                                                                                                                                           |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                |
| Notes                           | included: 1 x driver 100W (110/240V)   1 x dimmer DALI   1 x electrical cable 5m   4 x adjustable metal cable length 3m, ceiling attachment   remote driver   RAL 9005 black   RAL 9016 white   shipped in 2 pieces |

### Customization options

light configurations, separate light control, control systems

### Energy class

E

### Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

### Net lamp weight

7 kg

### Codes

BZRC1620G15WBO  
BZRC1620G15WNE  
BZRC1620G15WOR

### Structure

white  
black  
matte gold

### PACKAGE


Package 01

Dimension: 210x110x15 cm / Gross weight: 12,4 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

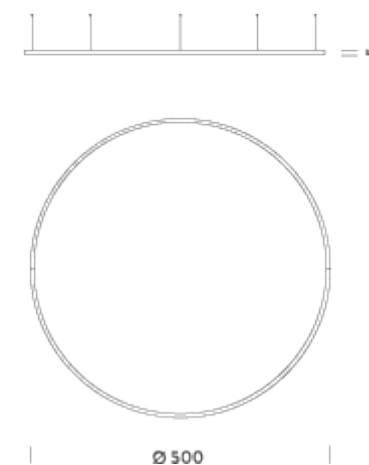

## Ø 2M | UP-DOWNLIGHT - 3000K - DALI

### LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

LED strip  
180W  
Diffused orientable  
DALI  
24V

3000K  
11078lm  
62lm/W  
SDCM<3  
90  
40  
ø200x5cm  
aluminium  
0°C / +35°C  
25°C

included: 1 x driver 250W (220/240V) | 1 x dimmer  
DALI | 2 x electrical cable 5m | 4 x adjustable metal  
cable length 3m, ceiling attachment | remote driver  
| RAL 9005 black | RAL 9016 white | shipped in 2  
pieces

Customization options

light configurations, separate light control, control  
systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Canopy box, 1  
driver, 2 electrical cables | Ceiling plate, for false  
ceiling

Net lamp weight

7,2 kg

### Codes

BZRC1720G15WBO  
BZRC1720G15WNE  
BZRC1720G15WOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 210x110x15 cm / Gross weight: 12,6 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

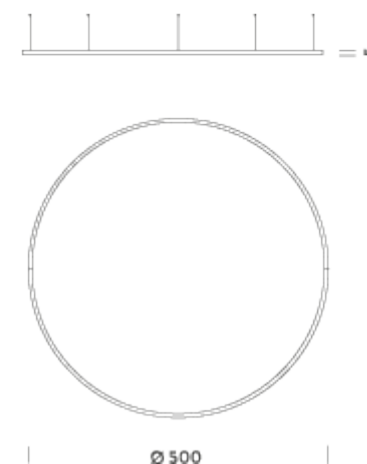

## Ø 2M | DOWNLIGHT - 4000K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                           |
| Total power                     | 90W                                                                                                                                                                                                                 |
| Emission                        | Diffused orientable                                                                                                                                                                                                 |
| Switching                       | DALI                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                 |
| Color temperature               | 4000K                                                                                                                                                                                                               |
| Luminous flux                   | 6154lm                                                                                                                                                                                                              |
| Initial luminaire efficacy      | 68lm/W                                                                                                                                                                                                              |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                              |
| Typ CRI                         | 90                                                                                                                                                                                                                  |
| IP class                        | 40                                                                                                                                                                                                                  |
| Dimensions                      | ø200x5cm                                                                                                                                                                                                            |
| Materials                       | aluminium                                                                                                                                                                                                           |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                |
| Notes                           | included: 1 x driver 100W (110/240V)   1 x dimmer DALI   1 x electrical cable 5m   4 x adjustable metal cable length 3m, ceiling attachment   remote driver   RAL 9005 black   RAL 9016 white   shipped in 2 pieces |

### Customization options

light configurations, separate light control, control systems

### Energy class

D

### Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

### Net lamp weight

7 kg

### Codes

BZRC1620G15NBO  
BZRC1620G15NNE  
BZRC1620G15NOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 210x110x15 cm / Gross weight: 12,4 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

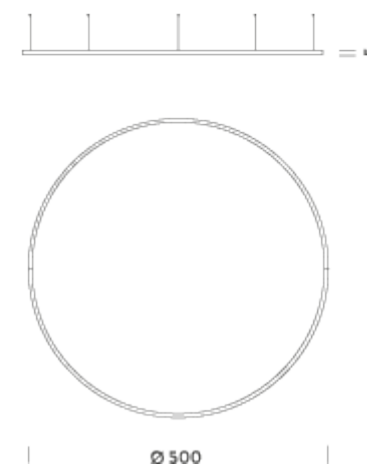

## Ø 2M | UP-DOWNLIGHT - 4000K - DALI

### LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

LED strip  
180W  
Diffused orientable  
DALI  
24V  
4000K  
12309lm  
68lm/W  
SDCM<3  
90  
40  
ø200x5cm  
aluminium  
0°C / +35°C  
25°C

included: 1 x driver 250W (220/240V) | 1 x dimmer  
DALI | 2 x electrical cable 5m | 4 x adjustable metal  
cable length 3m, ceiling attachment | remote driver  
| RAL 9005 black | RAL 9016 white | shipped in 2  
pieces

Customization options

light configurations, separate light control, control  
systems

Energy class

D

Accessories

Canopy, for concrete ceiling | Canopy box, 1  
driver, 2 electrical cables | Ceiling plate, for false  
ceiling

Net lamp weight

7,2 kg

### Codes

BZRC1720G15NBO  
BZRC1720G15NNE  
BZRC1720G15NOR

### Structure

white  
black  
gold

### PACKAGE

Package 01





Dimension: 210x110x15 cm / Gross weight: 12,6 kg

### Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

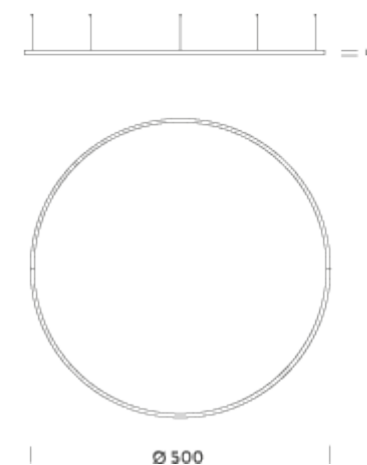

## Ø 3M | DOWNLIGHT - 2700K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                    |
| Total power                     | 134W                                                                                                                                                                                                                         |
| Emission                        | Diffused orientable                                                                                                                                                                                                          |
| Switching                       | DALI                                                                                                                                                                                                                         |
| Tension                         | 24V                                                                                                                                                                                                                          |
| Color temperature               | 2700K                                                                                                                                                                                                                        |
| Luminous flux                   | 7820lm                                                                                                                                                                                                                       |
| Initial luminaire efficacy      | 58lm/W                                                                                                                                                                                                                       |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                       |
| Typ CRI                         | 90                                                                                                                                                                                                                           |
| IP class                        | 40                                                                                                                                                                                                                           |
| Dimensions                      | ø300x5cm                                                                                                                                                                                                                     |
| Materials                       | aluminium                                                                                                                                                                                                                    |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                  |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                         |
| Notes                           | included: 1 x driver 150W (220/240V)   1 x dimmer DALI   1 x electrical cable 5m   6 x adjustable metal cable length 3m, ceiling attachment included   remote driver   RAL 9005 black   RAL 9016 white   shipped in 3 pieces |

### Customization options

light configurations, separate light control, control systems

### Energy class

E

### Accessories

Canopy, for concrete ceiling | Ceiling plate, for false ceiling

### Net lamp weight

9,8 kg

### Codes

BZRC1630G15DBO  
BZRC1630G15DNE  
BZRC1630G15DOR

### Structure

white  
black  
gold

### PACKAGE

Package 01





Dimension: 310x110x15 cm / Gross weight: 17,8 kg

### Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

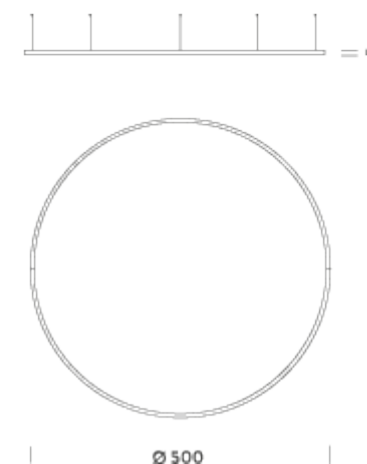

## Ø 3M | UP-DOWNLIGHT - 2700K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                           |
| Total power                     | 268W                                                                                                                                                                                                                |
| Emission                        | Diffused orientable                                                                                                                                                                                                 |
| Switching                       | DALI                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                 |
| Color temperature               | 2700K                                                                                                                                                                                                               |
| Luminous flux                   | 15640lm                                                                                                                                                                                                             |
| Initial luminaire efficacy      | 58lm/W                                                                                                                                                                                                              |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                              |
| Typ CRI                         | 90                                                                                                                                                                                                                  |
| IP class                        | 40                                                                                                                                                                                                                  |
| Dimensions                      | ø300x5cm                                                                                                                                                                                                            |
| Materials                       | aluminium                                                                                                                                                                                                           |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                |
| Notes                           | included: 3 x drivers 100 (110/240V)   3 x dimmer DALI   3 x electrical cable 5m   6 x adjustable metal cable length 3m, ceiling attachment   remote driver   RAL 9005 black   RAL 9016 white   shipped in 3 pieces |

### Customization options

light configurations, separate light control, control systems

### Energy class

E

### Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

### Net lamp weight

12,3 kg

### Codes

BZRC1730G15DBO  
BZRC1730G15DNE  
BZRC1730G15DOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 20,3 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

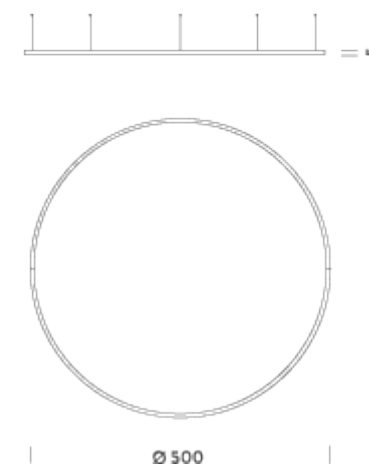

## Ø 3M | DOWNLIGHT - 3000K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                    |
| Total power                     | 134W                                                                                                                                                                                                                         |
| Emission                        | Diffused orientable                                                                                                                                                                                                          |
| Switching                       | DALI                                                                                                                                                                                                                         |
| Tension                         | 24V                                                                                                                                                                                                                          |
| Color temperature               | 3000K                                                                                                                                                                                                                        |
| Luminous flux                   | 8238lm                                                                                                                                                                                                                       |
| Initial luminaire efficacy      | 61lm/W                                                                                                                                                                                                                       |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                       |
| Typ CRI                         | 90                                                                                                                                                                                                                           |
| IP class                        | 40                                                                                                                                                                                                                           |
| Dimensions                      | ø300x5cm                                                                                                                                                                                                                     |
| Materials                       | aluminium                                                                                                                                                                                                                    |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                  |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                         |
| Notes                           | included: 1 x driver 150W (220/240V)   1 x dimmer DALI   1 x electrical cable 5m   6 x adjustable metal cable length 3m, ceiling attachment included   remote driver   RAL 9005 black   RAL 9016 white   shipped in 3 pieces |

### Customization options

light configurations, separate light control, control systems

### Energy class

E

### Accessories

Canopy, for concrete ceiling | Ceiling plate, for false ceiling

### Net lamp weight

9,8 kg

### Codes

BZRC1630G15WBO  
BZRC1630G15WNE  
BZRC1630G15WOR

### Structure

white  
black  
gold

### PACKAGE

Package 01





Dimension: 310x110x15 cm / Gross weight: 17,8 kg

### Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

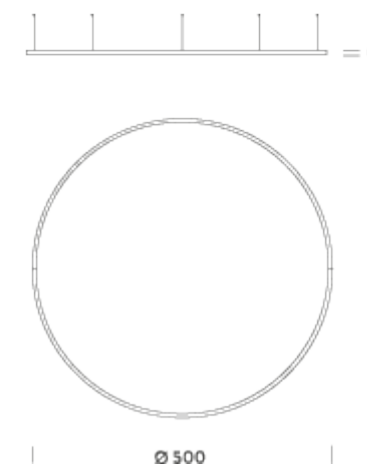

## Ø 3M | UP-DOWNLIGHT - 3000K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                           |
| Total power                     | 268W                                                                                                                                                                                                                |
| Emission                        | Diffused orientable                                                                                                                                                                                                 |
| Switching                       | DALI                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                 |
| Color temperature               | 3000K                                                                                                                                                                                                               |
| Luminous flux                   | 16476lm                                                                                                                                                                                                             |
| Initial luminaire efficacy      | 61lm/W                                                                                                                                                                                                              |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                              |
| Typ CRI                         | 90                                                                                                                                                                                                                  |
| IP class                        | 40                                                                                                                                                                                                                  |
| Dimensions                      | ø300x5cm                                                                                                                                                                                                            |
| Materials                       | aluminium                                                                                                                                                                                                           |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                |
| Notes                           | included: 3 x drivers 100 (110/240V)   3 x dimmer DALI   3 x electrical cable 5m   6 x adjustable metal cable length 3m, ceiling attachment   remote driver   RAL 9005 black   RAL 9016 white   shipped in 3 pieces |

### Customization options

light configurations, separate light control, control systems

### Energy class

E

### Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

### Net lamp weight

12,3 kg

### Codes

BZRC1730G15WBO  
BZRC1730G15WNE  
BZRC1730G15WOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 20,3 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

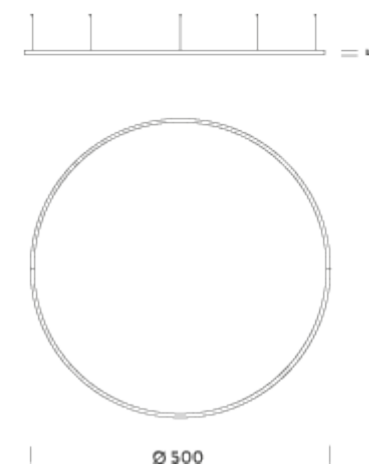

## Ø 3M | DOWNLIGHT - 4000K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                                              |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                    |
| Total power                     | 134W                                                                                                                                                                                                                         |
| Emission                        | Diffused orientable                                                                                                                                                                                                          |
| Switching                       | DALI                                                                                                                                                                                                                         |
| Tension                         | 24V                                                                                                                                                                                                                          |
| Color temperature               | 4000K                                                                                                                                                                                                                        |
| Luminous flux                   | 9153lm                                                                                                                                                                                                                       |
| Initial luminaire efficacy      | 68lm/W                                                                                                                                                                                                                       |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                       |
| Typ CRI                         | 90                                                                                                                                                                                                                           |
| IP class                        | 40                                                                                                                                                                                                                           |
| Dimensions                      | ø300x5cm                                                                                                                                                                                                                     |
| Materials                       | aluminium                                                                                                                                                                                                                    |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                  |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                         |
| Notes                           | included: 1 x driver 150W (220/240V)   1 x dimmer DALI   1 x electrical cable 5m   6 x adjustable metal cable length 3m, ceiling attachment included   remote driver   RAL 9005 black   RAL 9016 white   shipped in 3 pieces |

### Customization options

### Energy class

### Accessories

### Net lamp weight

### Codes

BZRC1630G15NBO  
BZRC1630G15NNE  
BZRC1630G15NOR

### Structure

white  
black  
gold

### PACKAGE

Package 01





Dimension: 310x110x15 cm / Gross weight: 17,8 kg

### Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

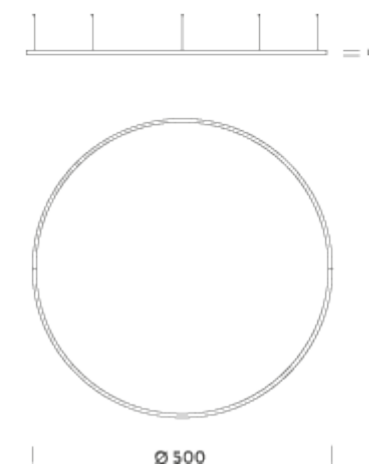

## Ø 3M | UP-DOWNLIGHT - 4000K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                           |
| Total power                     | 268W                                                                                                                                                                                                                |
| Emission                        | Diffused orientable                                                                                                                                                                                                 |
| Switching                       | DALI                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                 |
| Color temperature               | 4000K                                                                                                                                                                                                               |
| Luminous flux                   | 18306lm                                                                                                                                                                                                             |
| Initial luminaire efficacy      | 68lm/W                                                                                                                                                                                                              |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                              |
| Typ CRI                         | 90                                                                                                                                                                                                                  |
| IP class                        | 40                                                                                                                                                                                                                  |
| Dimensions                      | ø300x5cm                                                                                                                                                                                                            |
| Materials                       | aluminium                                                                                                                                                                                                           |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                |
| Notes                           | included: 3 x drivers 100 (110/240V)   3 x dimmer DALI   3 x electrical cable 5m   6 x adjustable metal cable length 3m, ceiling attachment   remote driver   RAL 9005 black   RAL 9016 white   shipped in 3 pieces |

### Customization options

light configurations, separate light control, control systems

### Energy class

D

### Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

### Net lamp weight

12,3 kg

### Codes

BZRC1730G15NBO  
BZRC1730G15NNE  
BZRC1730G15NOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 20,3 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

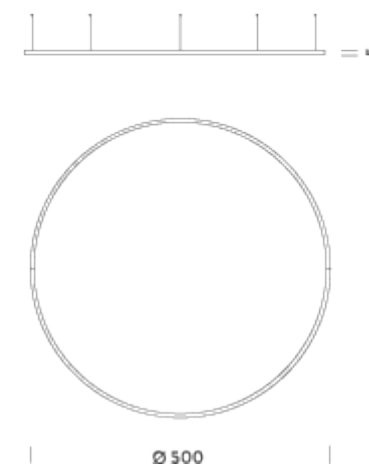

## Ø 5M | DOWNLIGHT -2700K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                            |
| Total power                     | 226W                                                                                                                                                                                                                 |
| Emission                        | Diffused orientable                                                                                                                                                                                                  |
| Switching                       | DALI                                                                                                                                                                                                                 |
| Tension                         | 24V                                                                                                                                                                                                                  |
| Color temperature               | 2700K                                                                                                                                                                                                                |
| Luminous flux                   | 13100lm                                                                                                                                                                                                              |
| Initial luminaire efficacy      | 58lm/W                                                                                                                                                                                                               |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                               |
| Typ CRI                         | 90                                                                                                                                                                                                                   |
| IP class                        | 40                                                                                                                                                                                                                   |
| Dimensions                      | ø500x5cm                                                                                                                                                                                                             |
| Materials                       | aluminum                                                                                                                                                                                                             |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                          |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                 |
| Notes                           | included: 1 x driver 250W (220/240V)   1 x dimmer DALI   2 x electrical cable 5m   10 x adjustable metal cable length 3m, ceiling attachment   remote driver   RAL 9005 black   RAL 9016 white   shipped in 5 pieces |

### Customization options

light configurations, separate light control, control systems

### Energy class

E

### Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

### Net lamp weight

15,9 kg

### Codes

BZRC1650G15DBO  
BZRC1650G15DNE  
BZRC1650G15DOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 23,9 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

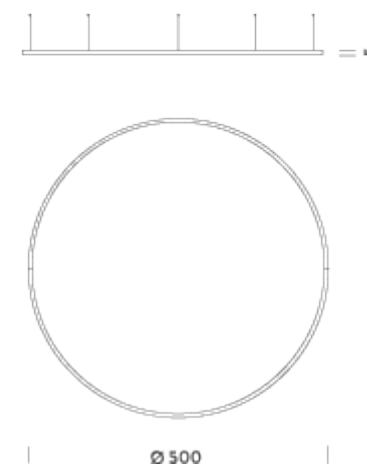

## Ø 5M | UP-DOWNLIGHT - 2700K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                     |
| Total power                     | 452W                                                                                                                                                                                                          |
| Emission                        | Diffused orientable                                                                                                                                                                                           |
| Switching                       | DALI                                                                                                                                                                                                          |
| Tension                         | 24V                                                                                                                                                                                                           |
| Color temperature               | 2700K                                                                                                                                                                                                         |
| Luminous flux                   | 26100lm                                                                                                                                                                                                       |
| Initial luminaire efficacy      | 58lm/W                                                                                                                                                                                                        |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                        |
| Typ CRI                         | 90                                                                                                                                                                                                            |
| IP class                        | 40                                                                                                                                                                                                            |
| Dimensions                      | ø500x5cm                                                                                                                                                                                                      |
| Materials                       | aluminium                                                                                                                                                                                                     |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                   |
| Performance ambient temperature | 25°C                                                                                                                                                                                                          |
| Notes                           | included: 5 x driver 100W (110/240V)   5 x dimmer DALI   5 x electrical cable 5m   10 x adjustable metal cable 3m, ceiling attachment   remote driver   RAL 9005 black   RAL 9016 white   shipped in 5 pieces |

### Customization options

light configurations, separate light control, control systems

### Energy class

E

### Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

### Net lamp weight

20,3 kg

### Codes

BZRC1750G15DBO  
BZRC1750G15DNE  
BZRC1750G15DOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 28,3 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

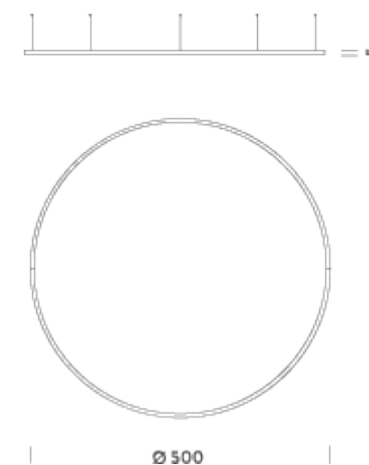

## Ø 5M | DOWNLIGHT - 3000K - DALI

### LAMPING

Source  
Total power  
Emission  
Switching  
Tension  
Color temperature  
Luminous flux  
Initial luminaire efficacy  
Initial chromaticity  
Typ CRI  
IP class  
Dimensions  
Materials  
Ambient temperature range  
Performance ambient temperature  
Notes

LED strip  
226W  
Diffused orientable  
DALI  
24V  
3000K  
13847lm  
61lm/W  
SDCM<3  
90  
40  
ø500x5cm  
aluminium  
0°C / +35°C  
25°C

included: 1 x driver 250W (220/240V) | 1 x dimmer  
DALI | 2 x electrical cable 5m | 10 x adjustable  
metal cable length 3m, ceiling attachment | remote  
driver | RAL 9005 black | RAL 9016 white | shipped  
in 5 pieces

Customization options

light configurations, separate light control, control  
systems

Energy class

E

Accessories

Canopy, for concrete ceiling | Canopy box, 1  
driver, 2 electrical cables | Ceiling plate, for false  
ceiling

Net lamp weight

15,9 kg

### Codes

BZRC1650G15WBO  
BZRC1650G15WNE  
BZRC1650G15WOR

### Structure

white  
black  
gold

### PACKAGE

Package 01





Dimension: 310x110x15 cm / Gross weight: 23,9 kg

### Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

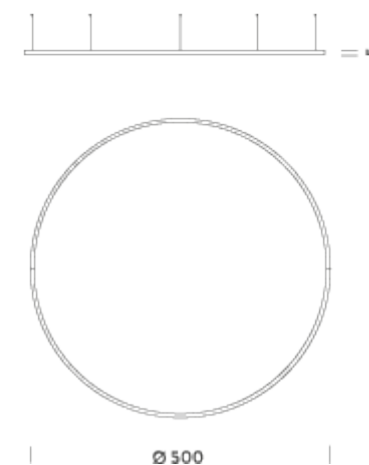

## Ø 5M | UP-DOWNLIGHT - 3000K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                     |
| Total power                     | 452W                                                                                                                                                                                                          |
| Emission                        | Diffused orientable                                                                                                                                                                                           |
| Switching                       | DALI                                                                                                                                                                                                          |
| Tension                         | 24V                                                                                                                                                                                                           |
| Color temperature               | 3000K                                                                                                                                                                                                         |
| Luminous flux                   | 27695lm                                                                                                                                                                                                       |
| Initial luminaire efficacy      | 61lm/W                                                                                                                                                                                                        |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                        |
| Typ CRI                         | 90                                                                                                                                                                                                            |
| IP class                        | 40                                                                                                                                                                                                            |
| Dimensions                      | ø500x5cm                                                                                                                                                                                                      |
| Materials                       | aluminium                                                                                                                                                                                                     |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                   |
| Performance ambient temperature | 25°C                                                                                                                                                                                                          |
| Notes                           | included: 5 x driver 100W (110/240V)   5 x dimmer DALI   5 x electrical cable 5m   10 x adjustable metal cable 3m, ceiling attachment   remote driver   RAL 9005 black   RAL 9016 white   shipped in 5 pieces |

### Customization options

light configurations, separate light control, control systems

### Energy class

E

### Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

### Net lamp weight

20,3 kg

### Codes

BZRC1750G15WBO  
BZRC1750G15WNE  
BZRC1750G15WOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 28,3 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

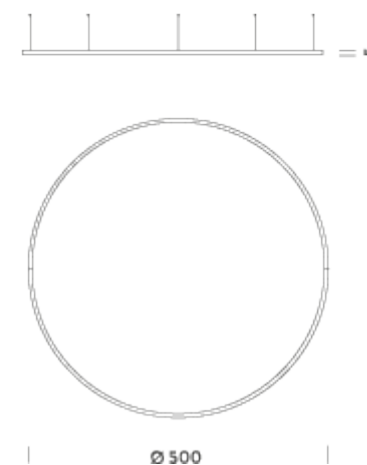

## Ø 5M | DOWNLIGHT - 4000K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                                      |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                            |
| Total power                     | 226W                                                                                                                                                                                                                 |
| Emission                        | Diffused orientable                                                                                                                                                                                                  |
| Switching                       | DALI                                                                                                                                                                                                                 |
| Tension                         | 24V                                                                                                                                                                                                                  |
| Color temperature               | 4000K                                                                                                                                                                                                                |
| Luminous flux                   | 15386lm                                                                                                                                                                                                              |
| Initial luminaire efficacy      | 68lm/W                                                                                                                                                                                                               |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                               |
| Typ CRI                         | 90                                                                                                                                                                                                                   |
| IP class                        | 40                                                                                                                                                                                                                   |
| Dimensions                      | ø500x5cm                                                                                                                                                                                                             |
| Materials                       | aluminium                                                                                                                                                                                                            |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                          |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                 |
| Notes                           | included: 1 x driver 250W (220/240V)   1 x dimmer DALI   2 x electrical cable 5m   10 x adjustable metal cable length 3m, ceiling attachment   remote driver   RAL 9005 black   RAL 9016 white   shipped in 5 pieces |

### Customization options

light configurations, separate light control, control systems

### Energy class

D

### Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

### Net lamp weight

15,9 kg

### Codes

BZRC1650G15NBO  
BZRC1650G15NNE  
BZRC1650G15NOR

### Structure

white  
black  
gold

### PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 23,9 kg




### Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

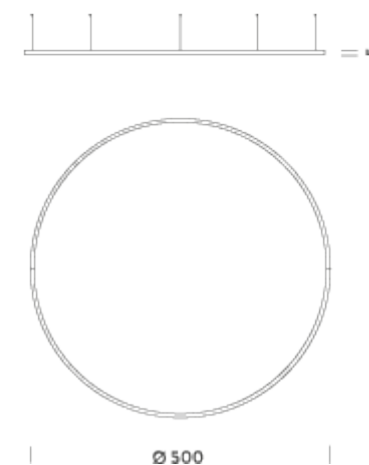

## Ø 5M | UP-DOWNLIGHT - 4000K - DALI

### LAMPING

|                                 |                                                                                                                                                                                                               |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                     |
| Total power                     | 452W                                                                                                                                                                                                          |
| Emission                        | Diffused orientable                                                                                                                                                                                           |
| Switching                       | DALI                                                                                                                                                                                                          |
| Tension                         | 24V                                                                                                                                                                                                           |
| Color temperature               | 4000K                                                                                                                                                                                                         |
| Luminous flux                   | 30772lm                                                                                                                                                                                                       |
| Initial luminaire efficacy      | 68lm/W                                                                                                                                                                                                        |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                        |
| Typ CRI                         | 90                                                                                                                                                                                                            |
| IP class                        | 40                                                                                                                                                                                                            |
| Dimensions                      | ø500x5cm                                                                                                                                                                                                      |
| Materials                       | aluminium                                                                                                                                                                                                     |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                   |
| Performance ambient temperature | 25°C                                                                                                                                                                                                          |
| Notes                           | included: 5 x driver 100W (110/240V)   5 x dimmer DALI   5 x electrical cable 5m   10 x adjustable metal cable 3m, ceiling attachment   remote driver   RAL 9005 black   RAL 9016 white   shipped in 5 pieces |

### Customization options

light configurations, separate light control, control systems

### Energy class

D

### Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

### Net lamp weight

20,3 kg

### Codes

BZRC1750G15NBO  
BZRC1750G15NNE  
BZRC1750G15NOR

### Structure

white  
black  
gold

### PACKAGE

Package 01

Dimension: 310x110x15 cm / Gross weight: 28,3 kg

### Certificazioni



CIRCLE HOME 0,85-1-1,5m

CIRCLE 2-3-5m

