


# ZIRKOL ROUND

Né d'une section de la lampe Zirkol Circle, Zirkol Round est le nouveau demi-cercle de la collection, dédié à l'éclairage général et décoratif. Corps en aluminium anodisé et écran de protection opale pour un éclairage downlight et uplight homogène. Zirkol Round est disponible en finition noir, blanc et or mat et en températures de couleur LED 2700K, 3000K et 4000K. Driver déporté et interface variation inclus.

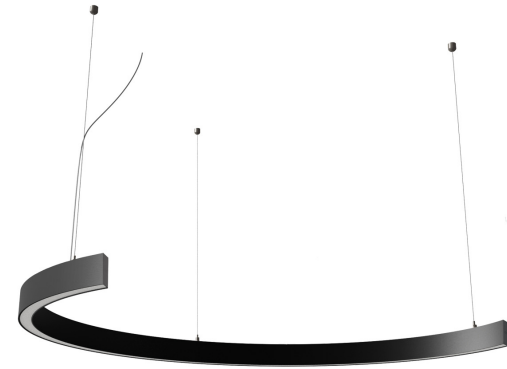

# Ø1M | DOWNLIGHT - 2700K

## LAMPING

Source	LED strip
Total power	22,5W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	1308lm
Typ CRI	90
IP class	40
Dimensions	100x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	external electrical cable   light configurations, separate light control, control systems



## Codes

BZRR1610G15DBO  
BZRR1610G15DNE  
BZRR1610G15DOR

## Structure

white  
black  
gold

## Certificazioni

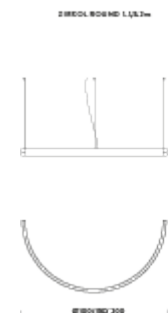

## Ø1M | DOWNLIGHT - 3000K

### LAMPING

Source	LED strip
Total power	22,5W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	1384lm
Typ CRI	90
IP class	40
Dimensions	100x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	external electrical cable   light configurations, separate light control, control systems



### Codes

BZRR1610G15WBO  
BZRR1610G15WNE  
BZRR1610G15WOR

### Structure

white  
black  
gold

### Certificazioni

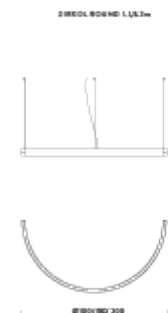

## Ø1M | DOWNLIGHT - 4000K

### LAMPING

Source	LED strip
Total power	22,5W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	1538lm
Typ CRI	90
IP class	40
Dimensions	100x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	external electrical cable   light configurations, separate light control, control systems



### Codes

BZRR1610G15NBO  
BZRR1610G15NNE  
BZRR1610G15NOR

### Structure

white  
black  
gold

### Certificazioni

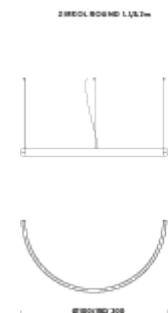

## Ø1M | UP-DOWNLIGHT - 2700K

### LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	2615lm
Typ CRI	90
IP class	40
Dimensions	100x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	external electrical cable   light configurations, separate light control, control systems



### Codes

BZRR1710G15DBO  
BZRR1710G15DNE  
BZRR1710G15DOR

### Structure

white  
black  
gold

### Certificazioni

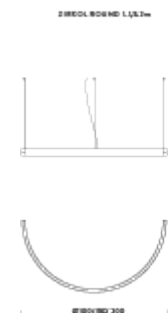

## Ø1M | UP-DOWNLIGHT - 3000K

### LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	2769lm
Typ CRI	90
IP class	40
Dimensions	100x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	external electrical cable   light configurations, separate light control, control systems



### Codes

BZRR1710G15WBO  
BZRR1710G15WNE  
BZRR1710G15WOR

### Structure

white  
black  
gold

### Certificazioni

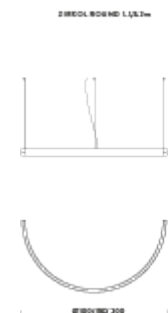

## Ø1M | UP-DOWNLIGHT - 4000K

### LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	3077lm
Typ CRI	90
IP class	40
Dimensions	100x50x5cm
Materials	aluminium
Notes	included: included: remote driver 60W (220/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled RAL 9005 black   RAL 9016 white   shipped assembled

### Customization options

external electrical cable | light configurations, separate light control, control systems



### Codes

BZRR1710G15NBO  
BZRR1710G15NNE  
BZRR1710G15NOR

### Structure

white  
black  
gold

### Certificazioni

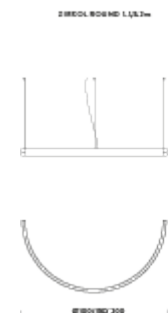

## Ø1,5M | DOWNLIGHT - 2700K

### LAMPING

Source	LED strip
Total power	34W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	1961lm
Typ CRI	90
IP class	40
Dimensions	150x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	external electrical cable   light configurations, separate light control, control systems



### Codes

BZRR1615G15DBO  
BZRR1615G15DNE  
BZRR1615G15DOR

### Structure

white  
black  
gold

### Certificazioni

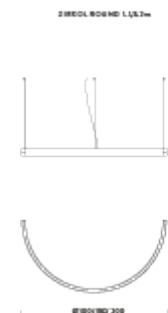



## Ø1,5M | DOWNLIGHT - 3000K

### LAMPING

Source	LED strip
Total power	34W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	2077lm
Typ CRI	90
IP class	40
Dimensions	150x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	external electrical cable   light configurations, separate light control, control systems



### Codes

BZRR1615G15WBO  
BZRR1615G15WNE  
BZRR1615G15WOR

### Structure

white  
black  
gold

### Certificazioni

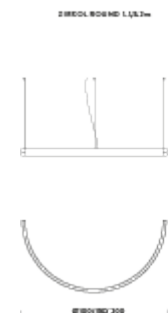

## Ø1,5M | DOWNLIGHT - 4000K

### LAMPING

Source	LED strip
Total power	34W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	34W
Luminous flux	2306lm
Typ CRI	90
IP class	40
Dimensions	150x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	external electrical cable   light configurations, separate light control, control systems



### Codes

BZRR1615G15NBO  
BZRR1615G15NNE  
BZRR1615G15NOR

### Structure

white  
black  
matte gold

### Certificazioni

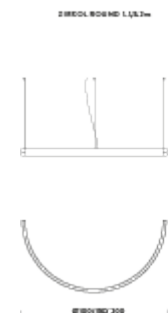

## Ø1,5M | UP-DOWNLIGHT - 2700K

### LAMPING

Source	LED strip
Total power	68W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	3923lm
Typ CRI	90
IP class	40
Dimensions	150x50x5cm
Materials	aluminium
Notes	included: remote driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	external electrical cable   light configurations, separate light control, control systems



### Codes

BZRR1715G15DBO  
BZRR1715G15DNE  
BZRR1715G15DOR

### Structure

white  
black  
gold

### Certificazioni

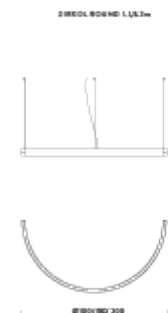

## Ø1,5M | UP-DOWNLIGHT - 3000K

### LAMPING

Source	LED strip
Total power	68W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	4154lm
Typ CRI	90
IP class	40
Dimensions	150x50x5cm
Materials	aluminium
Notes	included: remote driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	external electrical cable   light configurations, separate light control, control systems



### Codes

BZRR1715G15WBO  
BZRR1715G15WNE  
BZRR1715G15WOR

### Structure

white  
black  
gold

### Certificazioni

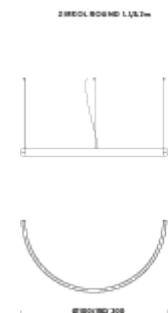

## Ø1,5M | UP-DOWNLIGHT - 4000K

### LAMPING

Source	LED strip
Total power	68W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	4616lm
Typ CRI	90
IP class	40
Dimensions	150x50x5cm
Materials	aluminium
Notes	included: remote driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	external electrical cable   light configurations, separate light control, control systems



### Codes

BZRR1715G15NBO  
BZRR1715G15NNE  
BZRR1715G15NOR

### Structure

white  
black  
gold

### Certificazioni

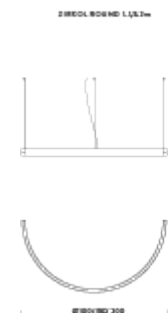

## Ø2M | DOWNLIGHT - 2700K

### LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALi
Tension	24V
Color temperature	2700K
Luminous flux	2630lm
Typ CRI	90
IP class	40
Dimensions	200x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	external electrical cable   light configurations, separate light control, control systems



### Codes

BZRR1620G15DBO  
BZRR1620G15DNE  
BZRR1620G15DOR

### Structure

white  
black  
gold

### Certificazioni

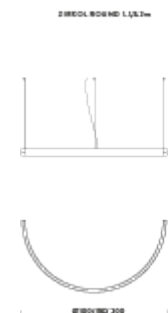

## Ø2M | DOWNLIGHT - 3000K

### LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	2769lm
Typ CRI	90
IP class	40
Dimensions	200x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	external electrical cable   light configurations, separate light control, control systems



### Codes

BZRR1620G15WBO  
BZRR1620G15WNE  
BZRR1620G15WOR

### Structure

white  
black  
gold

### Certificazioni

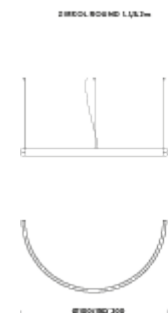

## Ø2M | DOWNLIGHT - 4000K

### LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	3077lm
Typ CRI	90
IP class	40
Dimensions	200x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	external electrical cable   light configurations, separate light control, control systems



### Codes

BZRR1620G15NBO  
BZRR1620G15NNE  
BZRR1620G15NOR

### Structure

white  
black  
matte gold

### Certificazioni

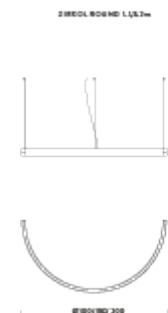



## Ø2M | UP-DOWNLIGHT - 2700K

### LAMPING

Source	LED strip
Total power	90W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	5250lm
Typ CRI	90
IP class	40
Dimensions	200x50x5cm
Materials	aluminium
Notes	included: remote driver 100W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	external electrical cable   light configurations, separate light control, control systems



### Codes

BZRR1720G15DBO  
BZRR1720G15DNE  
BZRR1720G15DOR

### Structure

white  
black  
gold

### Certificazioni

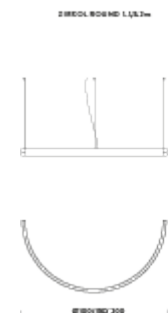

## Ø2M | UP-DOWNLIGHT - 3000K

### LAMPING

Source	LED strip
Total power	90W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	5539lm
Typ CRI	90
IP class	40
Dimensions	200x50x5cm
Materials	aluminium
Notes	included: remote driver 100W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	external electrical cable   light configurations, separate light control, control systems



### Codes

BZRR1720G15WBO  
BZRR1720G15WNE  
BZRR1720G15WOR

### Structure

white  
black  
gold

### Certificazioni

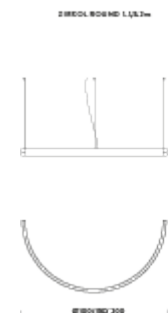

## Ø2M | UP-DOWNLIGHT | 4000K

### LAMPING

Source	LED strip
Total power	90W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	6154lm
Typ CRI	90
IP class	40
Dimensions	200x50x5cm
Materials	aluminium
Notes	included: remote driver 100W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled
Customization options	external electrical cable   light configurations, separate light control, control systems

### Codes

BZRR1720G15NBO  
BZRR1720G15NNE  
BZRR1720G15NOR

### Structure

white  
black  
gold

### Certificazioni

