

ZIRKOL TRACK OPAL

Nouvelle lampe de la collection, Zirkol Track Opal est réalisée avec un profil linéaire en aluminium proposé en finition noir et blanc. Ecran opale pour un éclairage direct et homogène, avec température de couleur LED de 3000K ou 4000K. Driver on-board.



0,84M | 3000K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	ON/OFF
Tension	220/240V
Color temperature	3000K
Luminous flux	1680lm
Typ CRI	>90
IP class	40
Dimensions	84x3,5x10cm
Materials	aluminium
Notes	included: 1 x driver Ultraslim 60W (220/240V) integrated driver RAL 9005 black RAL 9016 white compatible with TRACK 3C/0-10V length
Customization options	


Codes

BZRL54084G15WBO
BZRL54084G15WNE

Structure

white
black

Certificazioni

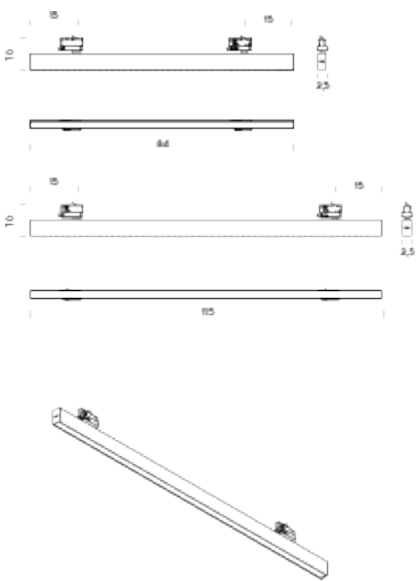

0,84M | 4000K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	ON/OFF
Tension	220/240V
Color temperature	4000K
Luminous flux	1764lm
Typ CRI	>90
IP class	40
Dimensions	84x3,5x10cm
Materials	aluminium
Notes	included: 1 x driver Ultraslim 60W (220/240V) integrated driver RAL 9005 black RAL 9016 white compatible with TRACK 3C/0-10V length
Customization options	


Codes

BZRL54084G15NBO
BZRL54084G15NNE

Structure

white
black

Certificazioni

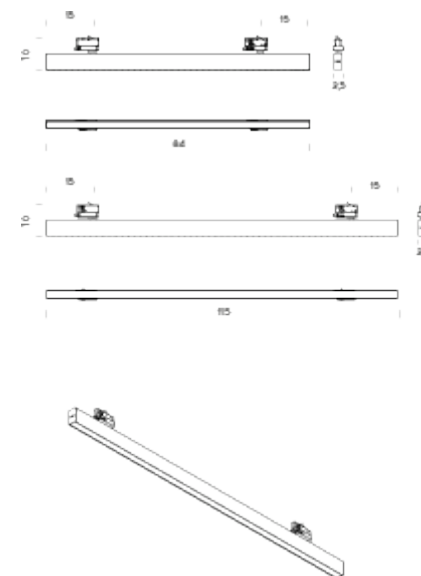

1,15M | 3000K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	ON/OFF
Tension	220/240V
Color temperature	3000K
Typ CRI	>90
IP class	40
Dimensions	115x3,5x5cm
Materials	aluminium
Notes	included: 1 x driver Ultraslim 60W (220/240V) integrated driver RAL 9005 black RAL 9016 white compatible with TRACK 3C/0-10V length
Customization options	


Codes

BZRL54115G15WBO
BZRL54115G15WNE

Structure

white
black

Certificazioni

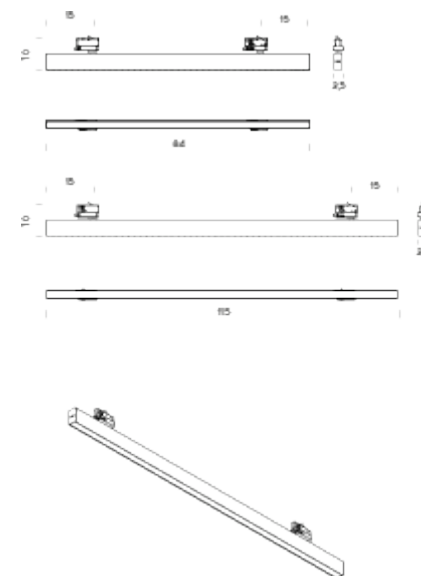

1,15M | 4000K

LAMPING

Source	LED strip
Total power	26W
Emission	diffused
Switching	ON/OFF
Tension	220/240V
Color temperature	4000K
Luminous flux	2415lm
Typ CRI	>90
IP class	40
Dimensions	115x3,5x10cm
Materials	aluminium
Notes	included: 1 x driver Ultraslim 60W (220/240V) integrated driver RAL 9005 black RAL 9016 white compatible with TRACK 3C/0-10V length
Customization options	

Codes

BZRL54115G15NBO
BZRL54115G15NNE

Structure

white
black

Certificazioni

