

CAPRI

Famiglia di faretti da interni per illuminazione d'accento. L'apparecchio è ruotabile di 90° sull'asse verticale e di 355° sull'asse orizzontale. L'eccellente struttura di dissipazione del calore e il driver integrato, sono perfettamente combinati insieme. Il design integrato rende l'aspetto più compatto e minimale. L'angolo del fascio regolabile consente di soddisfare qualsiasi esigenza di illuminazione.



DIMMABLE TRIAC | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	Dimmable triac
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LW2 81

CAP LN2 81

Structure

white

black

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni




CAPRI TRIAC/CASAMBI

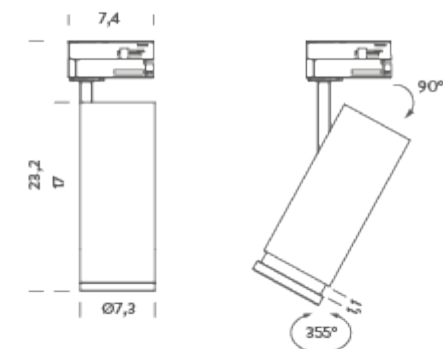

CAPRI 0-10V/DALI

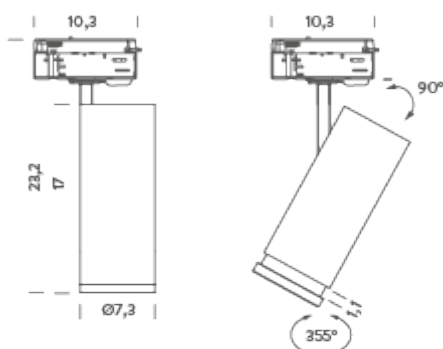

CAPRI DOB

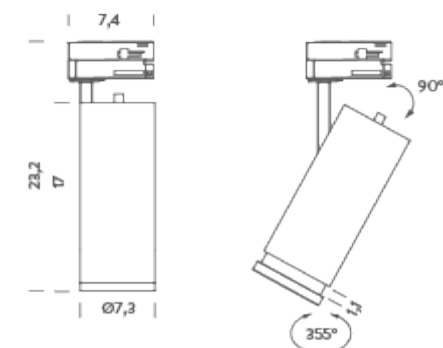

DIMMABLE TRIAC | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	Dimmable triac
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Typ CRI	90
IP class	20
Dimensions	ø7,3x17cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LW3 81
CAP LN3 81

Structure

white
black

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni




CAPRI TRIAC/CASAMBI

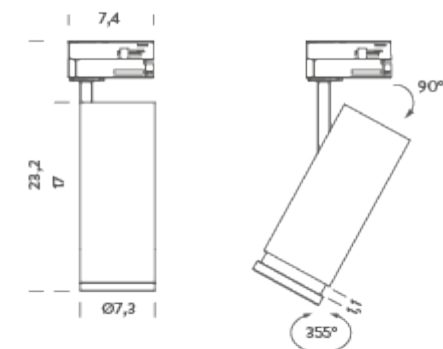

CAPRI 0-10V/DALI

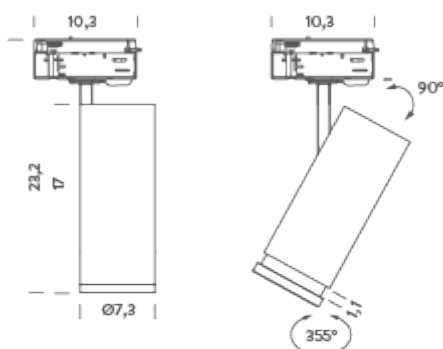

CAPRI DOB

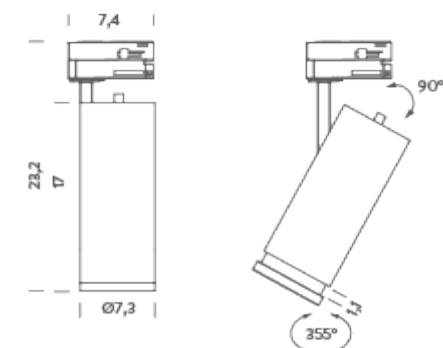

DIMMABLE 0-10V | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	Dimmable 0-10V
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LW2 82

CAP LN2 82

Structure

white

black

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni




CAPRI TRIAC/CASAMBI

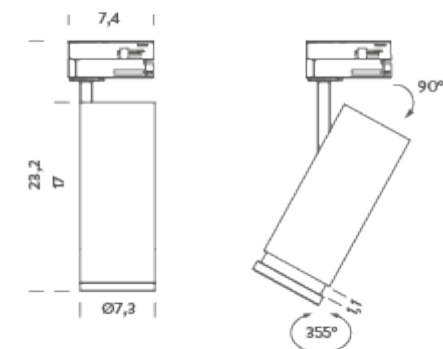

CAPRI 0-10V/DALI

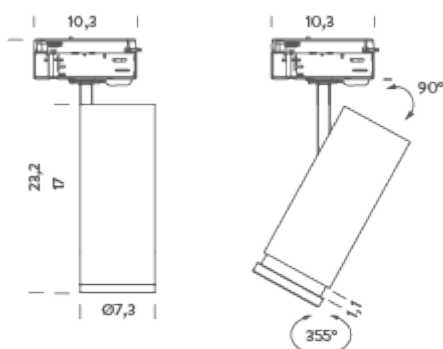

CAPRI DOB

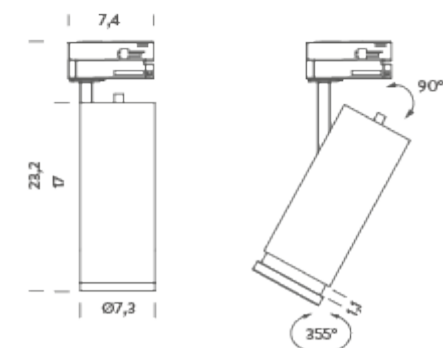

DIMMABLE 0-10V | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	Dimmable 0-10V
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LW3 82
CAP LN3 82

Structure

white
black

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni




CAPRI TRIAC/CASAMBI

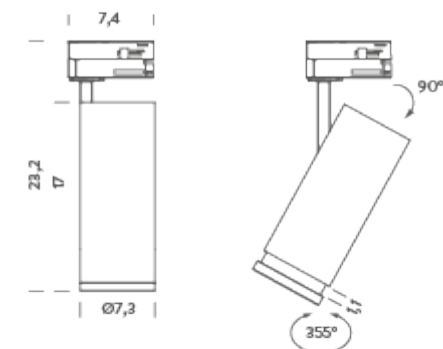

CAPRI 0-10V/DALI

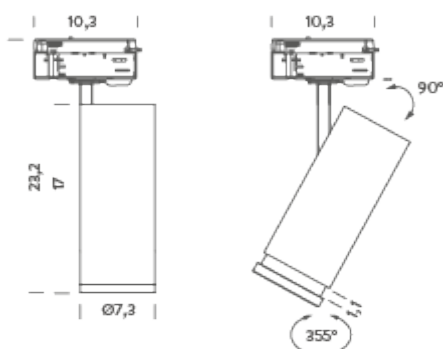

CAPRI DOB

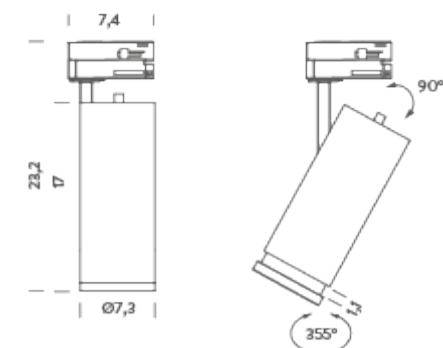

DIMMABLE DALI | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	Dimmable DALI
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LW2 83

CAP LN2 83

Structure

white

black

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni




CAPRI TRIAC/CASAMBI

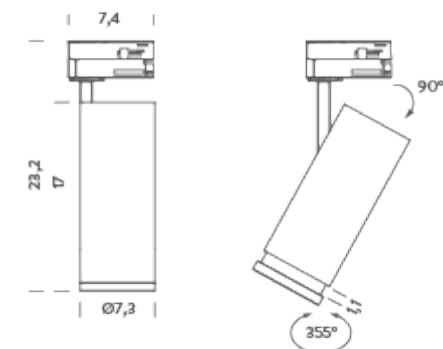

CAPRI 0-10V/DALI

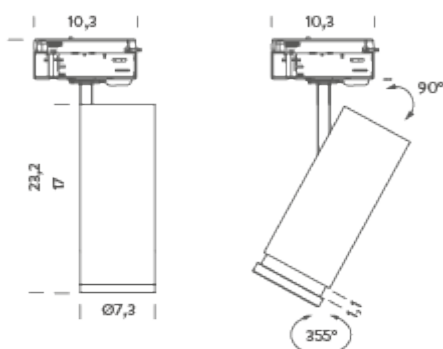

CAPRI DOB

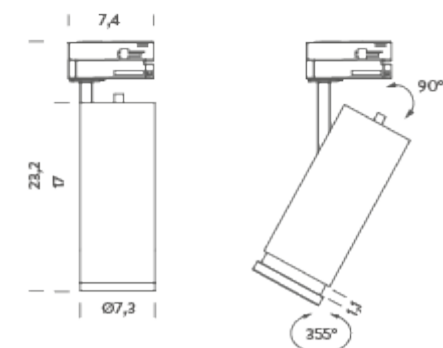

DIMMABLE DALI | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	Dimmable DALI
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LW3 83
CAP LN3 83

Structure

white
black

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni




CAPRI TRIAC/CASAMBI

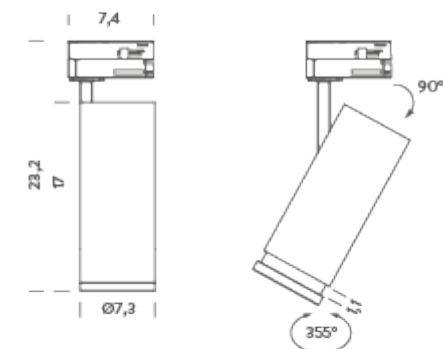

CAPRI 0-10V/DALI

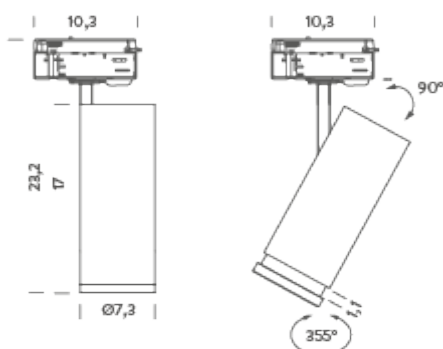

CAPRI DOB

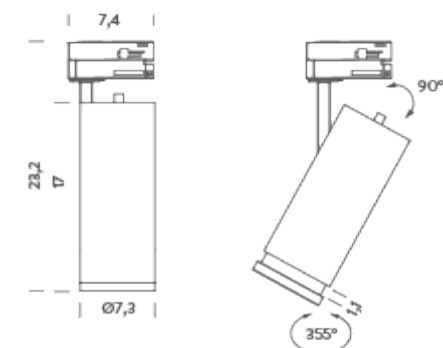

DIMMER ON BOARD 1-10V | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°55°
Switching	dimmer on board
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAPLN2 84
CAP LW2 84

Structure

black
white

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni

UK
CA


CAPRI TRIAC/CASAMBI

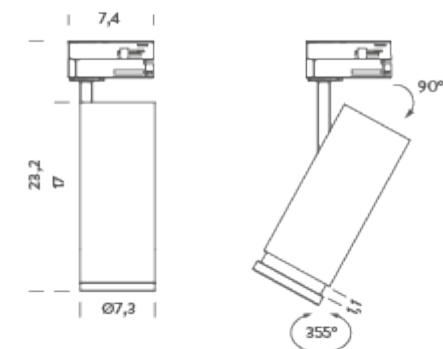

CAPRI 0-10V/DALI

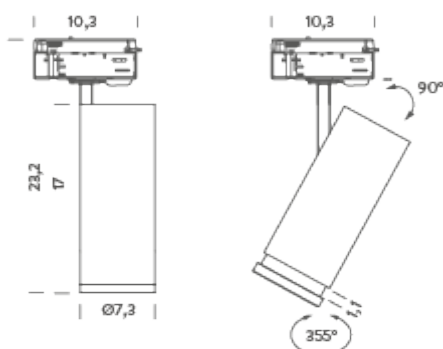

CAPRI DOB

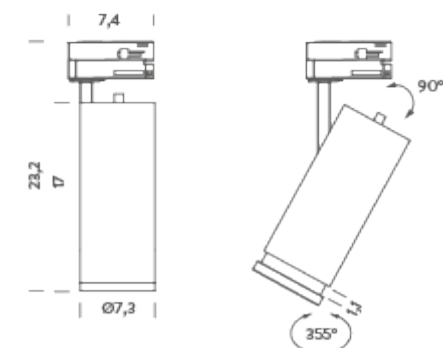

DIMMER ON BOARD 1-10V | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	dimmer on board
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LN3 84
CAP LW3 84

Structure

black
white

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni

UK
CA


CAPRI TRIAC/CASAMBI

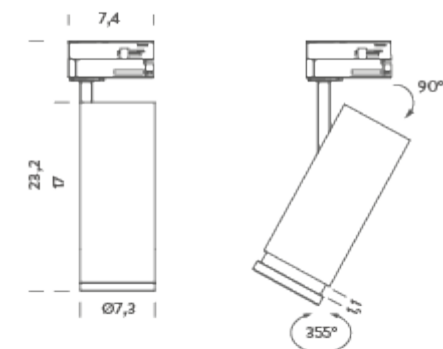

CAPRI 0-10V/DALI

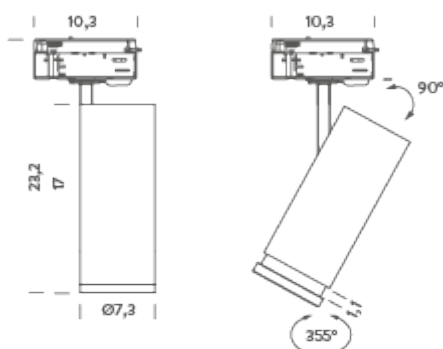

CAPRI DOB

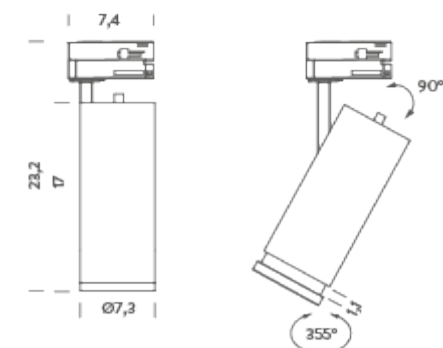

CASAMBI (BLUETOOTH) | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	CASAMBI (bluetooth)
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LN2 85
CAP LW2 85

Structure

black
white

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni

UK
CA


CAPRI TRIAC/CASAMBI

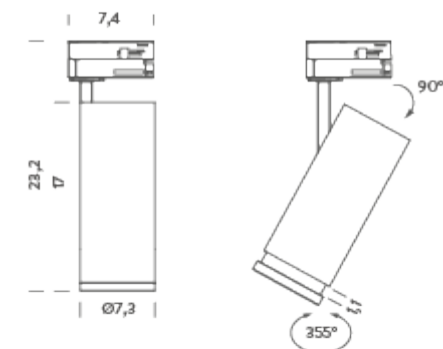

CAPRI 0-10V/DALI

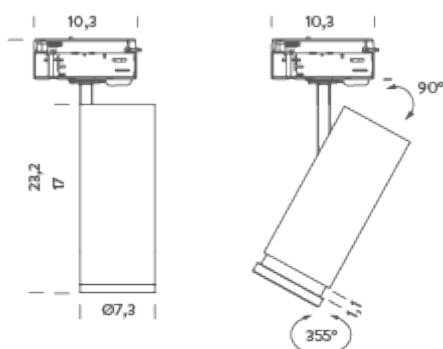

CAPRI DOB

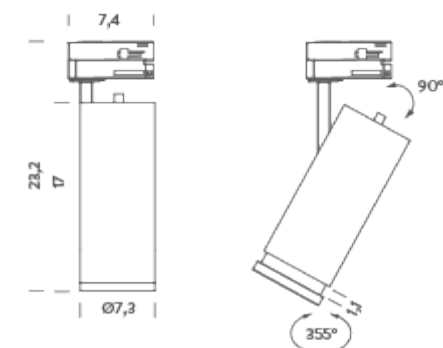

CASAMBI (BLUETOOTH) | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	CASAMBI (bluetooth)
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LN3 85
CAP LW3 85

Structure

black
white

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni

UK
CA

CAPRI TRIAC/CASAMBI

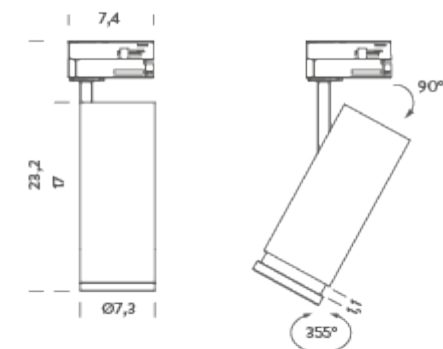

CAPRI 0-10V/DALI

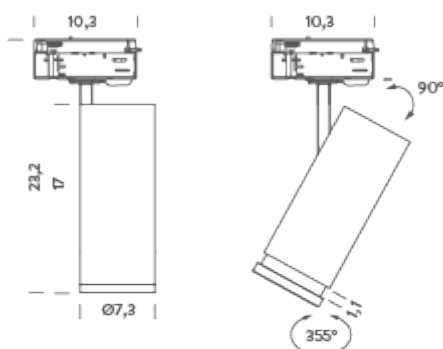

CAPRI DOB

