

# ELBA

Famiglia di faretti da interni per illuminazione d'accento. L'apparecchio può essere ruotato di 90 ° in verticale e di 355 ° a livello orizzontale, per orientare la luce secondo necessità. La struttura di dissipazione del calore e il driver integrato, sono perfettamente combinati insieme. Il design integrato rende il prodotto compatto e minimale. Il fascio ottico regolabile permette di soddisfare qualsiasi esigenza di illuminazione.



## DIMMABLE TRIAC | 2700K

### LAMPING

|                                   |                                                                                                                   |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                                        |
| Total power                       | 13W                                                                                                               |
| Emission                          | direct adjustable 15°-55°                                                                                         |
| Switching                         | dimnable TRIAC                                                                                                    |
| Tension                           | 220/240V                                                                                                          |
| Color temperature                 | 2700K                                                                                                             |
| Luminous flux                     | 830lm                                                                                                             |
| Initial luminaire efficacy        | 64lm/W                                                                                                            |
| Initial chromaticity              | SDCM<3                                                                                                            |
| Typ CRI                           | 90                                                                                                                |
| IP class                          | 20                                                                                                                |
| Dimensions                        | ø5,6x15cm                                                                                                         |
| Materials                         | aluminum                                                                                                          |
| Ambient temperature range         | 0°C / +35°C                                                                                                       |
| Performance ambient temperature   | 25°C                                                                                                              |
| Mechanical impact protection code | IK02                                                                                                              |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with TRACK 3C/0-10V |
| Net lamp weight                   | 0,5 kg                                                                                                            |

### Codes

ELB LW2 81  
ELB LN2 81

### Structure


white  
black

### PACKAGE

Package 01

Dimension: 21x19x6 cm / Gross weight: 0,7 kg

### Certificazioni

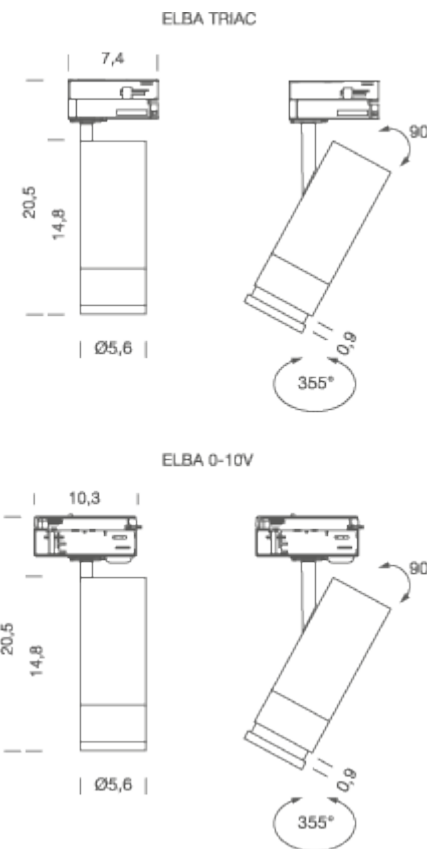

## DIMMABLE TRIAC | 3000K

### LAMPING

|                                   |                                                                                                                   |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                                        |
| Total power                       | 13W                                                                                                               |
| Emission                          | direct adjustable 15°-55°                                                                                         |
| Switching                         | dimnable TRIAC                                                                                                    |
| Tension                           | 220/240V                                                                                                          |
| Color temperature                 | 3000K                                                                                                             |
| Luminous flux                     | 900lm                                                                                                             |
| Initial luminaire efficacy        | 69lm/W                                                                                                            |
| Initial chromaticity              | SDCM<3                                                                                                            |
| Typ CRI                           | 90                                                                                                                |
| IP class                          | 20                                                                                                                |
| Dimensions                        | ø5,6x15cm                                                                                                         |
| Materials                         | aluminum                                                                                                          |
| Ambient temperature range         | 0°C / +35°C                                                                                                       |
| Performance ambient temperature   | 25°C                                                                                                              |
| Mechanical impact protection code | IK02                                                                                                              |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with TRACK 3C/0-10V |
| Net lamp weight                   | 0,5 kg                                                                                                            |

### Codes

ELB LW3 81  
ELB LN3 81

### Structure


white  
black

### PACKAGE

Package 01

Dimension: 21x19x6 cm / Gross weight: 0,7 kg

### Certificazioni

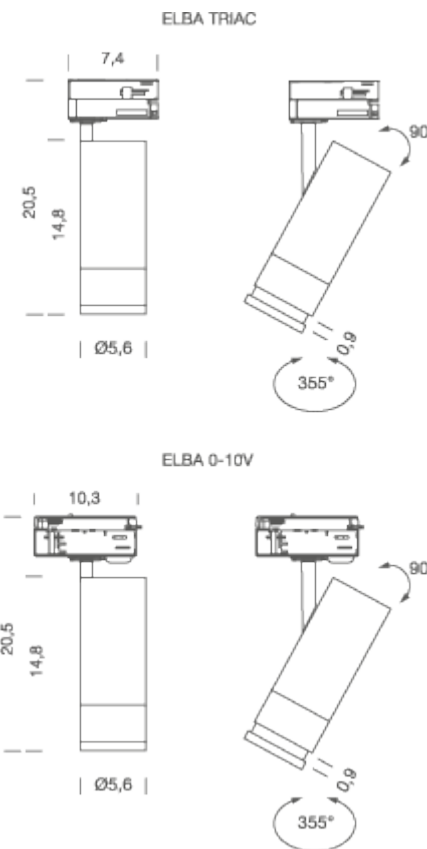

## DIMMABLE 0-10V | 2700K

### LAMPING

|                                   |                                                                                                                   |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                                        |
| Total power                       | 13W                                                                                                               |
| Emission                          | direct adjustable 15°-55°                                                                                         |
| Switching                         | dimmable 0-10V                                                                                                    |
| Tension                           | 220/240V                                                                                                          |
| Color temperature                 | 2700K                                                                                                             |
| Luminous flux                     | 830lm                                                                                                             |
| Initial luminaire efficacy        | 64lm/W                                                                                                            |
| Initial chromaticity              | SDCM<3                                                                                                            |
| Typ CRI                           | 90                                                                                                                |
| IP class                          | 20                                                                                                                |
| Dimensions                        | ø5,6x15cm                                                                                                         |
| Materials                         | aluminum                                                                                                          |
| Ambient temperature range         | 0°C / +35°C                                                                                                       |
| Performance ambient temperature   | 25°C                                                                                                              |
| Mechanical impact protection code | IK02                                                                                                              |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with TRACK 3C/0-10V |
| Net lamp weight                   | 0,5 kg                                                                                                            |

### Codes

ELB LW2 82  
ELB LN2 82

### Structure


white  
black

### PACKAGE

Package 01

Dimension: 21x19x6 cm / Gross weight: 0,7 kg

### Certificazioni

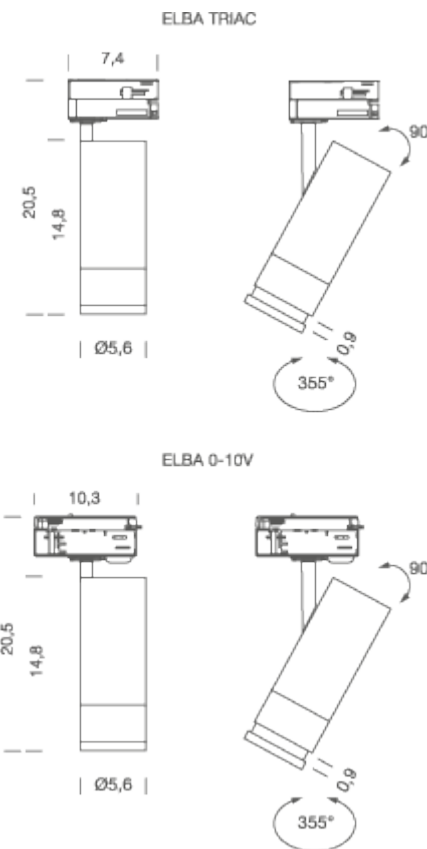

## DIMMABLE 0-10V | 3000K

### LAMPING

|                                   |                                                                                                                   |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                                        |
| Total power                       | 13W                                                                                                               |
| Emission                          | direct adjustable 15°-55°                                                                                         |
| Switching                         | dimnable 0-10V                                                                                                    |
| Tension                           | 220/240V                                                                                                          |
| Color temperature                 | 3000K                                                                                                             |
| Luminous flux                     | 900lm                                                                                                             |
| Initial luminaire efficacy        | 69lm/W                                                                                                            |
| Initial chromaticity              | SDCM<3                                                                                                            |
| Typ CRI                           | 90                                                                                                                |
| IP class                          | 20                                                                                                                |
| Dimensions                        | ø5,6x15cm                                                                                                         |
| Materials                         | aluminum                                                                                                          |
| Ambient temperature range         | 0°C / +35°C                                                                                                       |
| Performance ambient temperature   | 25°C                                                                                                              |
| Mechanical impact protection code | IK02                                                                                                              |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with TRACK 3C/0-10V |
| Net lamp weight                   | 0,5 kg                                                                                                            |

### Codes

ELB LW3 82  
ELB LN3 82

### Structure

white  
black

### PACKAGE

Package 01

Dimension: 21x19x6 cm / Gross weight: 0,7 kg

### Certificazioni

