

# GAMMA

*Bernhard Osann*

Gamma trova la sua perfetta applicazione in tutti gli ambienti in cui sia necessaria un'illuminazione downlight UGR<19 e opale uplight. Dal design essenziale e lineare, con la sorgente luminosa che percorre l'intera lunghezza del braccio lampada, è dotata di dimmable push botton per la gestione separata della luce diretta e indiretta. Proposta con finitura nera, è disponibile con due temperature colore LED.



# 3000K | DIMMER ON BOARD

## LAMPING


|                                 |                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                              |
| Total power                     | 55W                                                                                    |
| Emission                        | downlight UGR<19 / opal uplight                                                        |
| Switching                       | dimmer on board                                                                        |
| Tension                         | 220/240V                                                                               |
| Color temperature               | 3000K                                                                                  |
| Luminous flux                   | 3800lm                                                                                 |
| Initial luminaire efficacy      | 69lm/W                                                                                 |
| Initial chromaticity            | SDCM<3                                                                                 |
| Typ CRI                         | 90                                                                                     |
| IP class                        | 40                                                                                     |
| Dimensions                      | 25x132,4x220cm                                                                         |
| Ambient temperature range       | 0°C / +35°C                                                                            |
| Performance ambient temperature | 25°C                                                                                   |
| Notes                           | UGR<19   separate control   dimmable push button<br>  RAL 9005 black   driver included |
| Net lamp weight                 | 10,6 kg                                                                                |

Codes  
MGAM35A1/49WNE

Structure  
black

PACKAGE  
Package 01  
Dimension: 230x35x18 cm / Gross weight: 14,6 kg

## Certificazioni

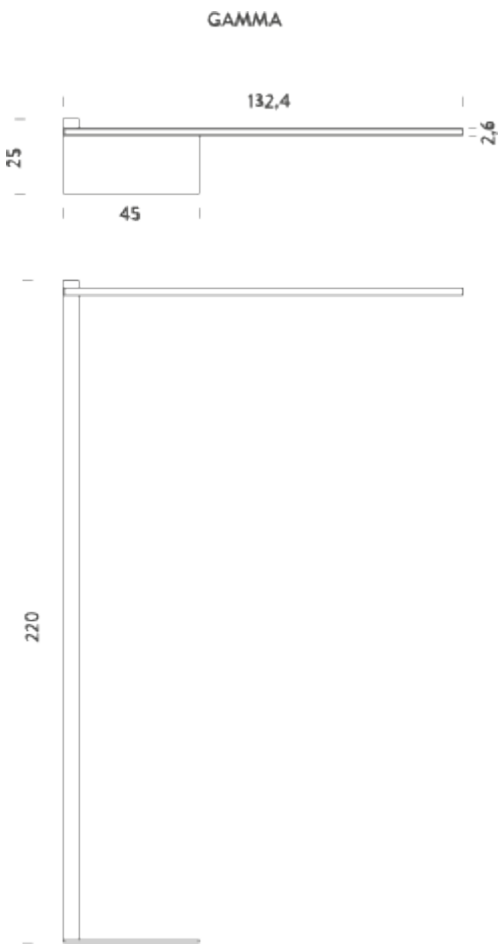

# 3000K | DIMMER ON BOARD + CASAMBI

## LAMPING

|                                 |                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                              |
| Total power                     | 55W                                                                                    |
| Emission                        | downlight UGR<19 / opal uplight                                                        |
| Switching                       | dimmer on board + Casambi                                                              |
| Tension                         | 220/240V                                                                               |
| Color temperature               | 3000K                                                                                  |
| Luminous flux                   | 3800lm                                                                                 |
| Initial luminaire efficacy      | 69lm/W                                                                                 |
| Initial chromaticity            | SDCM<3                                                                                 |
| Typ CRI                         | 90                                                                                     |
| IP class                        | 40                                                                                     |
| Dimensions                      | 25x132,4x220cm                                                                         |
| Ambient temperature range       | 0°C / +35°C                                                                            |
| Performance ambient temperature | 25°C                                                                                   |
| Notes                           | UGR<19   separate control   dimmable push button<br>  RAL 9005 black   driver included |
| Net lamp weight                 | 10,6 kg                                                                                |

## Codes

MGAM3CA1/49WNE


## Structure

black

## PACKAGE

Package 01      Dimension: 230x35x18 cm / Gross weight: 14,6 kg

## Certificazioni

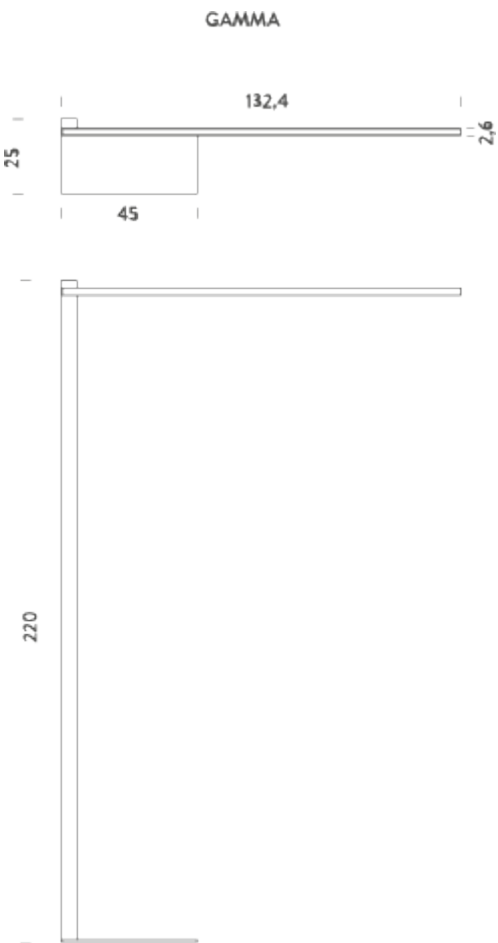

# 4000K | DIMMER ON BOARD

## LAMPING

|                                 |                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                              |
| Total power                     | 55W                                                                                    |
| Emission                        | downlight UGR<19 / opal uplight                                                        |
| Switching                       | dimmer on board                                                                        |
| Tension                         | 220/240V                                                                               |
| Color temperature               | 4000K                                                                                  |
| Luminous flux                   | 4000lm                                                                                 |
| Initial luminaire efficacy      | 73lm/W                                                                                 |
| Initial chromaticity            | SDCM<3                                                                                 |
| Typ CRI                         | 90                                                                                     |
| IP class                        | 40                                                                                     |
| Dimensions                      | 25x132,4x220cm                                                                         |
| Ambient temperature range       | 0°C / +35°C                                                                            |
| Performance ambient temperature | 25°C                                                                                   |
| Notes                           | UGR<19   separate control   dimmable push button<br>  RAL 9005 black   driver included |
| Net lamp weight                 | 10,6 kg                                                                                |

## Codes

MGAM35A1/49NNE


## Structure

black

## PACKAGE

Package 01      Dimension: 230x35x18 cm / Gross weight: 14,6 kg

## Certificazioni

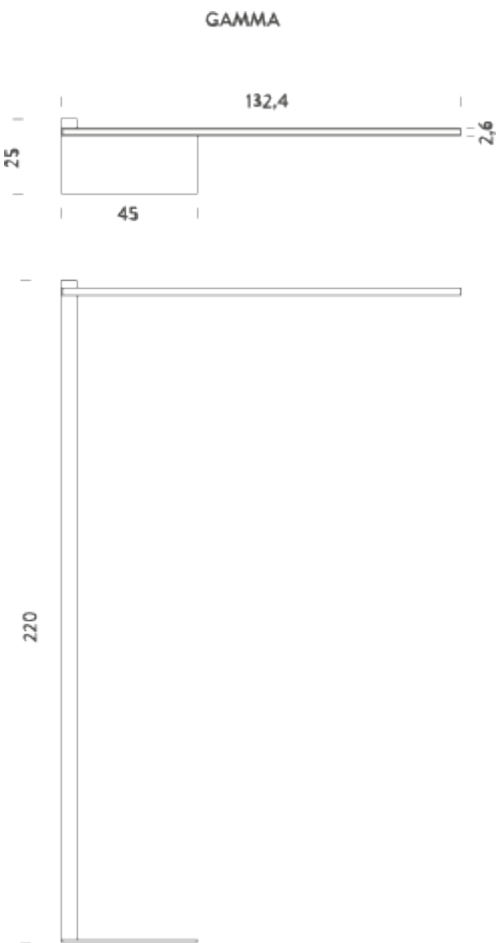

4000K | DIMMER ON BOARD + CASAMBI

LAMPING

|                                 |                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                              |
| Total power                     | 55W                                                                                    |
| Emission                        | downlight UGR<19 / opal uplight                                                        |
| Switching                       | dimmer on board + Casambi                                                              |
| Tension                         | 220/240V                                                                               |
| Color temperature               | 4000K                                                                                  |
| Luminous flux                   | 4000lm                                                                                 |
| Initial luminaire efficacy      | 73lm/W                                                                                 |
| Initial chromaticity            | SDCM<3                                                                                 |
| Typ CRI                         | 90                                                                                     |
| IP class                        | 40                                                                                     |
| Dimensions                      | 25x132,4x220cm                                                                         |
| Ambient temperature range       | 0°C / +35°C                                                                            |
| Performance ambient temperature | 25°C                                                                                   |
| Notes                           | UGR<19   separate control   dimmable push button<br>  RAL 9005 black   driver included |
| Net lamp weight                 | 10,6 kg                                                                                |

Codes  
MGAM3CA1/49NNE

Structure  
black

PACKAGE  
Package 01  
Dimension: 230x35x18 cm / Gross weight: 14,6 kg

Certificazioni

