

GRAVITY

GRAVITY è il nuovo sistema magnetico della collezione FLEX. Una galassia di elementi grafici versatili e distintivi in grado di valorizzare ogni ambiente e fornire un effetto luminoso focale. Installato in modo magnetico e dotato di una sicurezza supplementare meccanica. Disponibile nelle versioni trimless, a soffitto e a sospensione, le unità lineari si alimentano a 48V e consentono l'integrazione di più soluzioni, installate tramite fissaggio magnetico e meccanico, rispondendo alle diverse esigenze d'interni. La massima flessibilità degli spot orientabili valorizza gli ambienti e la lente antiriflesso arretrata permette di ottenere un'illuminazione d'accento o diffusa. I moduli lineari presentano uno schermo opalino per un'illuminazione omogenea e accogliente. Per un elevato comfort visivo e un controllo ottimale dell'abbagliamento su tutta la superficie, il sistema è completato da unità UGR<19: recessed o fold, rispettivamente per un'emissione di luce diretta o orientabile. GRAVITY può essere installato singolarmente o in configurazioni multiple, creando figure geometriche con angoli di 90°.



SPOT 3W | 2700K - 38°

LAMPING

Source	LED
Total power	3W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	175lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø2,5x18,4x10,6cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,1 kg

Codes

MFLE5201746DAN

Structure


black

PACKAGE

Package 01

Dimension: 20x9x5,5 cm / Gross weight: 0,15 kg

Certificazioni

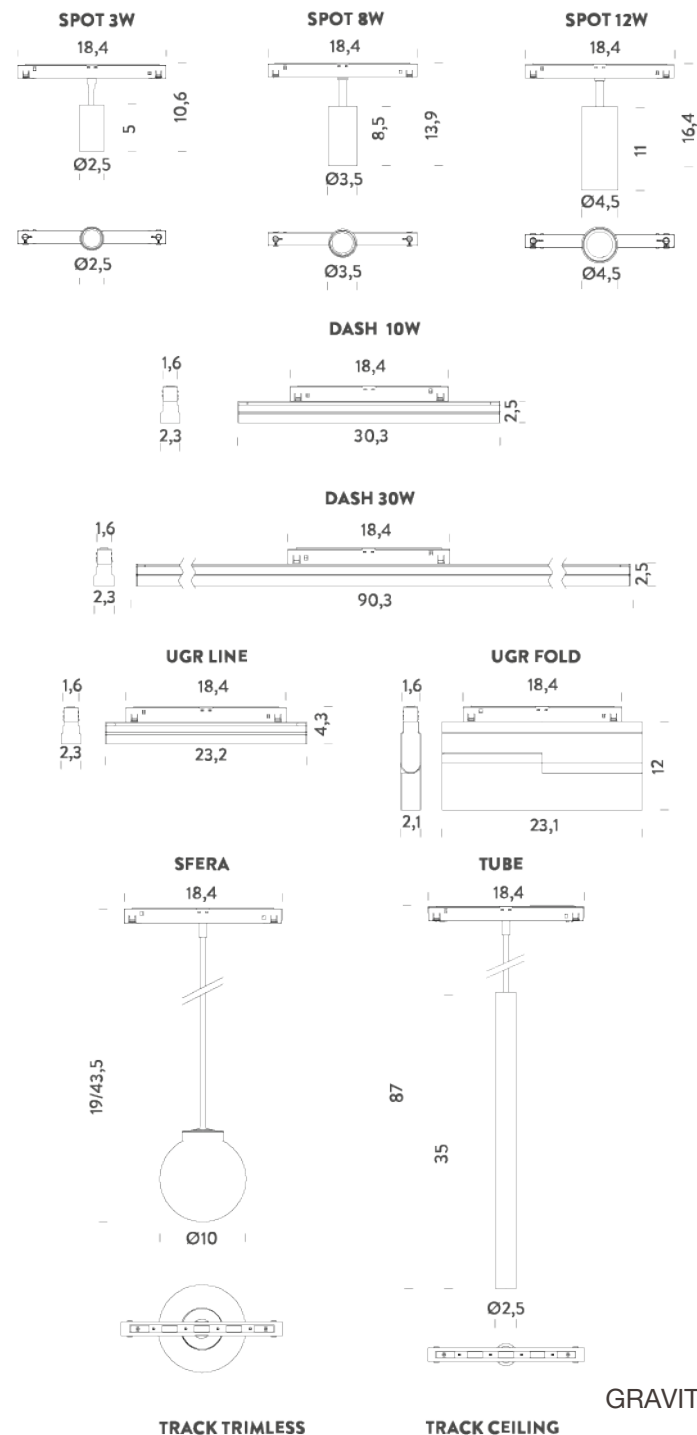

SPOT 3W | 3000K - 38°

LAMPING

Source	LED
Total power	3W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	205lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø2,5x18,4x10,6cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,1 kg

Codes

MFLE5201746WAN

Structure


black

PACKAGE

Package 01

Dimension: 20x9x5,5 cm / Gross weight: 0,15 kg

Certificazioni

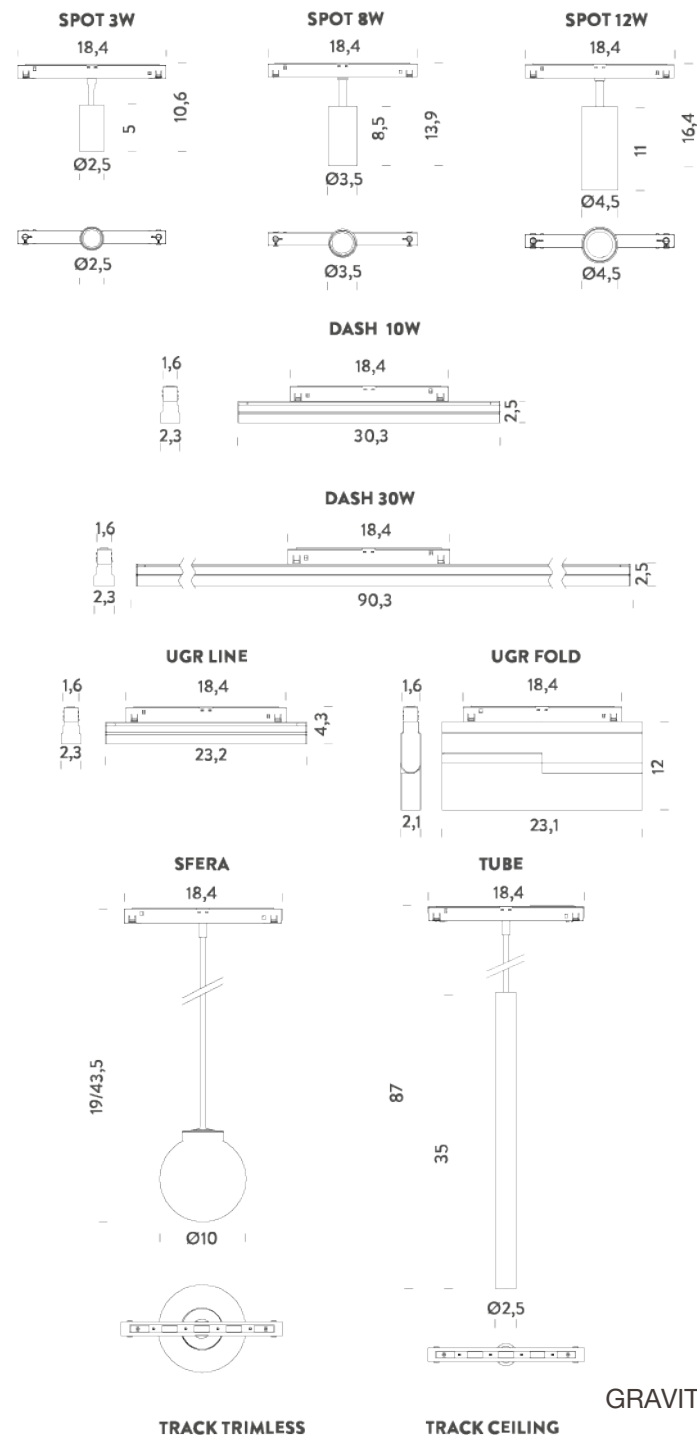

SPOT 8W | 2700K - 15°

LAMPING

Source	LED
Total power	8W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	500lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø3,5x18,4x13,9cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,15 kg

Codes

MFLE5201344DAN

Structure


black

PACKAGE

Package 01

Dimension: 20,5x14,5x7,5 cm / Gross weight: 0,25 kg

Certificazioni

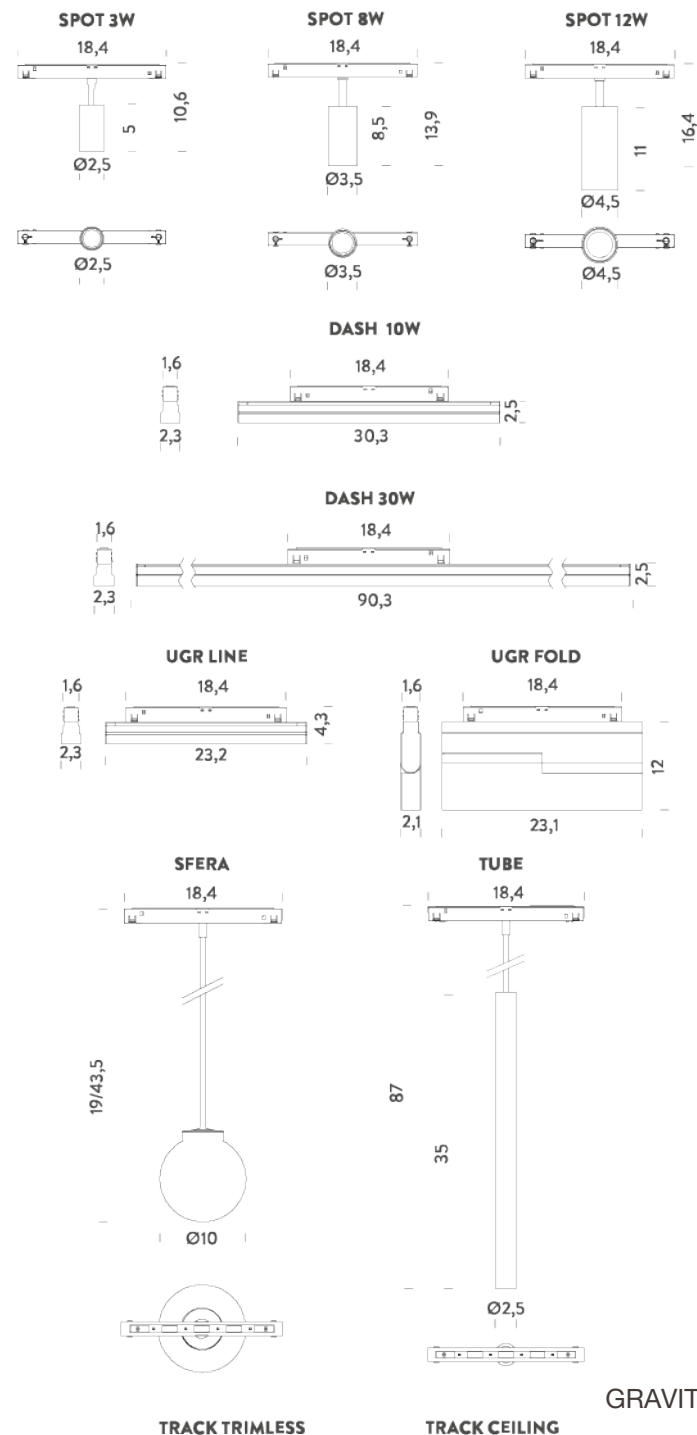

SPOT 8W | 2700K - 38°

LAMPING

Source	LED
Total power	8W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	630lm
Initial luminaire efficacy	79lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø3,5x18,4x13,9cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,15 kg

Codes

MFLE5201744DAN

Structure


black

PACKAGE

Package 01

Dimension: 20,5x14,5x7,5 cm / Gross weight: 0,25 kg

Certificazioni

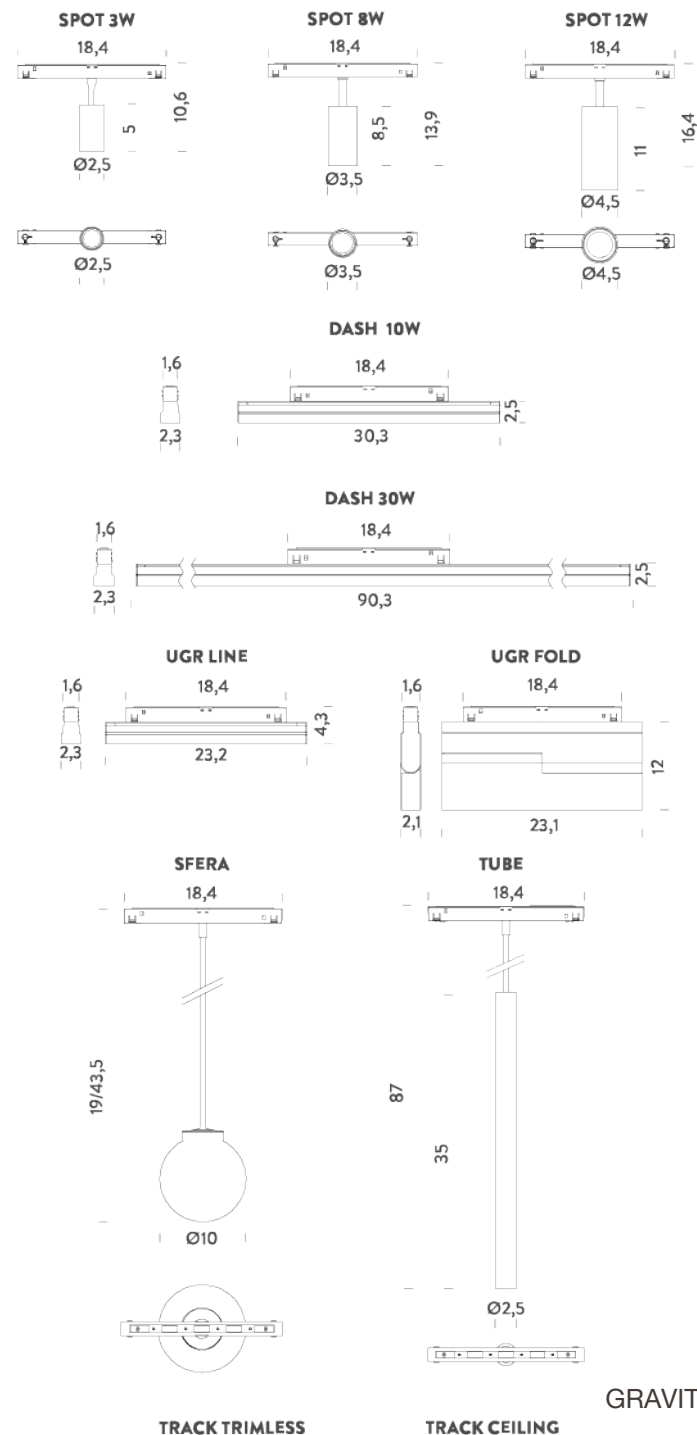

SPOT 8W | 3000K - 15°

LAMPING

Source	LED
Total power	8W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	520lm
Initial luminaire efficacy	65lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø3,5x18,4x13,9cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,15 kg

Codes

MFLE5201344WAN

PACKAGE

Package 01


Certificazioni



Structure

black

Dimension: 20,5x14,5x7,5 cm / Gross weight: 0,25 kg

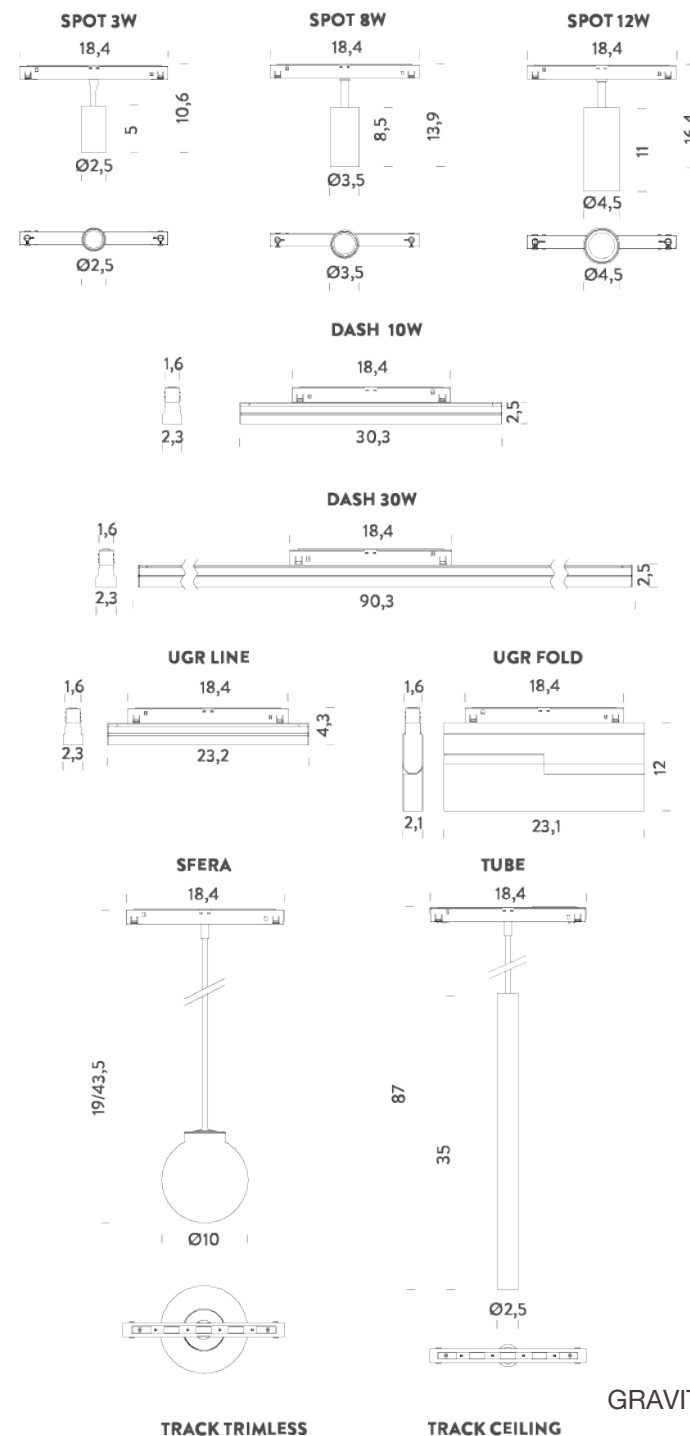

SPOT 8W | 3000K - 38°

LAMPING

Source	LED
Total power	8W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	665lm
Initial luminaire efficacy	83lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø3,5x18,4x13,9cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,15 kg

Codes

MFLE5201744WAN

PACKAGE

Package 01


Certificazioni



Structure

black

Dimension: 20,5x14,5x7,5 cm / Gross weight: 0,25 kg

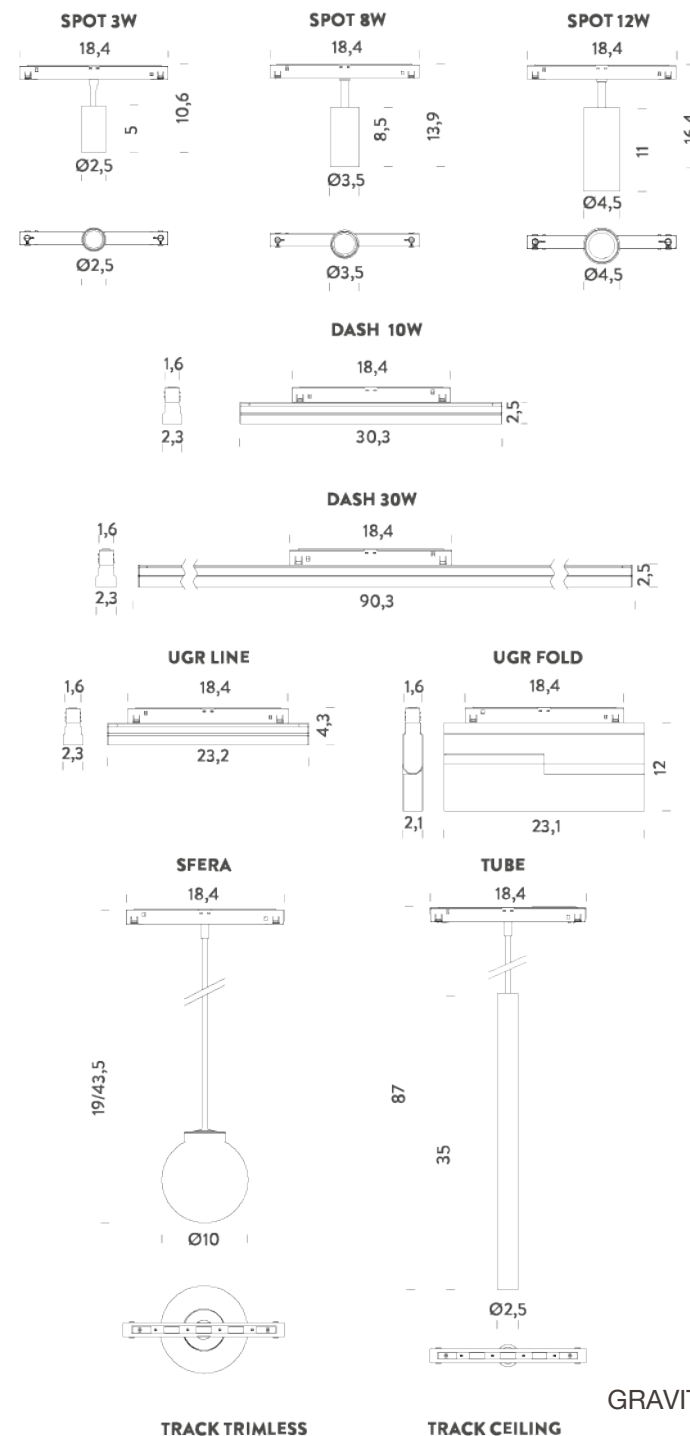

SPOT 12W | 2700K - 15°

LAMPING

Source	LED
Total power	12W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	900lm
Initial luminaire efficacy	75lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø4,5x18,4x16,4cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,23 kg

Codes

MFLE5201345DAN

Structure


black

PACKAGE

Package 01

Dimension: 25,5x19,5x7,5 cm / Gross weight: 0,41 kg

Certificazioni

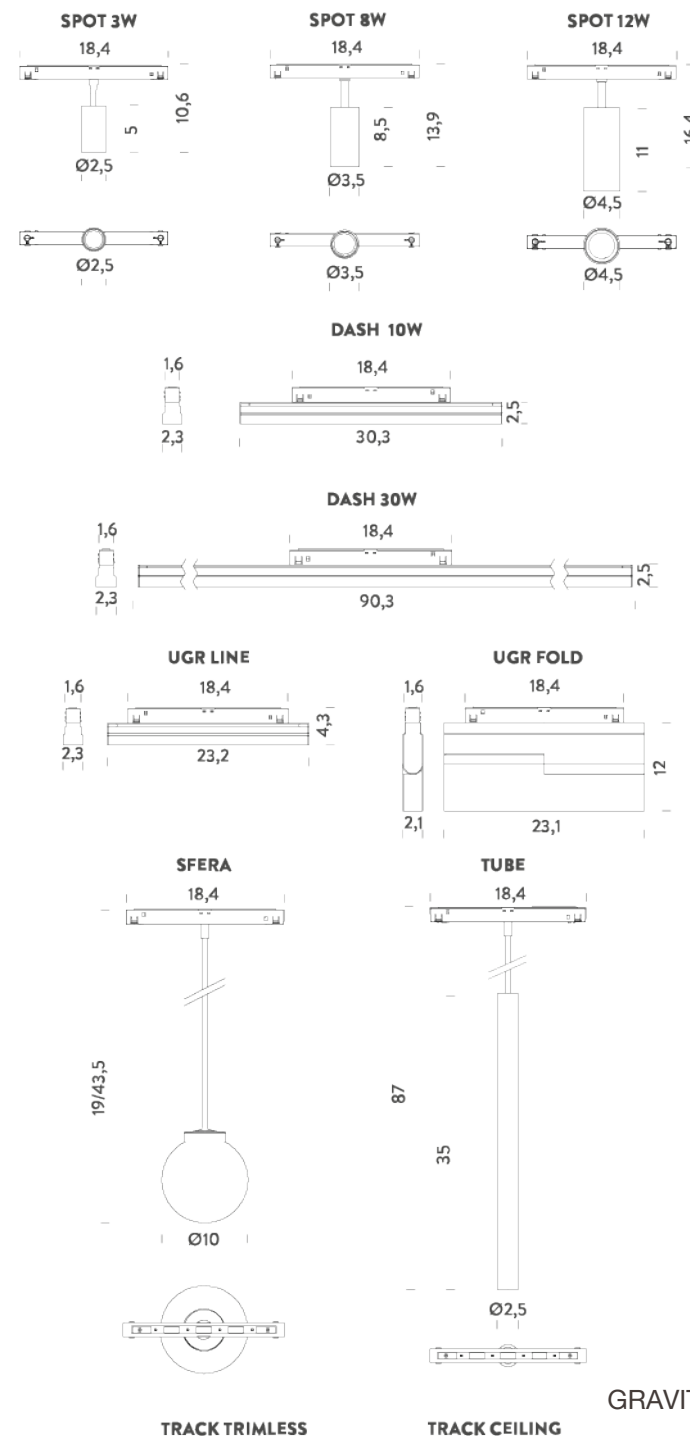

SPOT 12W | 2700K - 38°

LAMPING

Source	LED
Total power	12W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	890lm
Initial luminaire efficacy	74lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø4,5x18,4x16,4cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,23 kg

Codes

MFLE5201745DAN

Structure


black

PACKAGE

Package 01

Dimension: 25,5x19,5x7,5 cm / Gross weight: 0,41 kg

Certificazioni

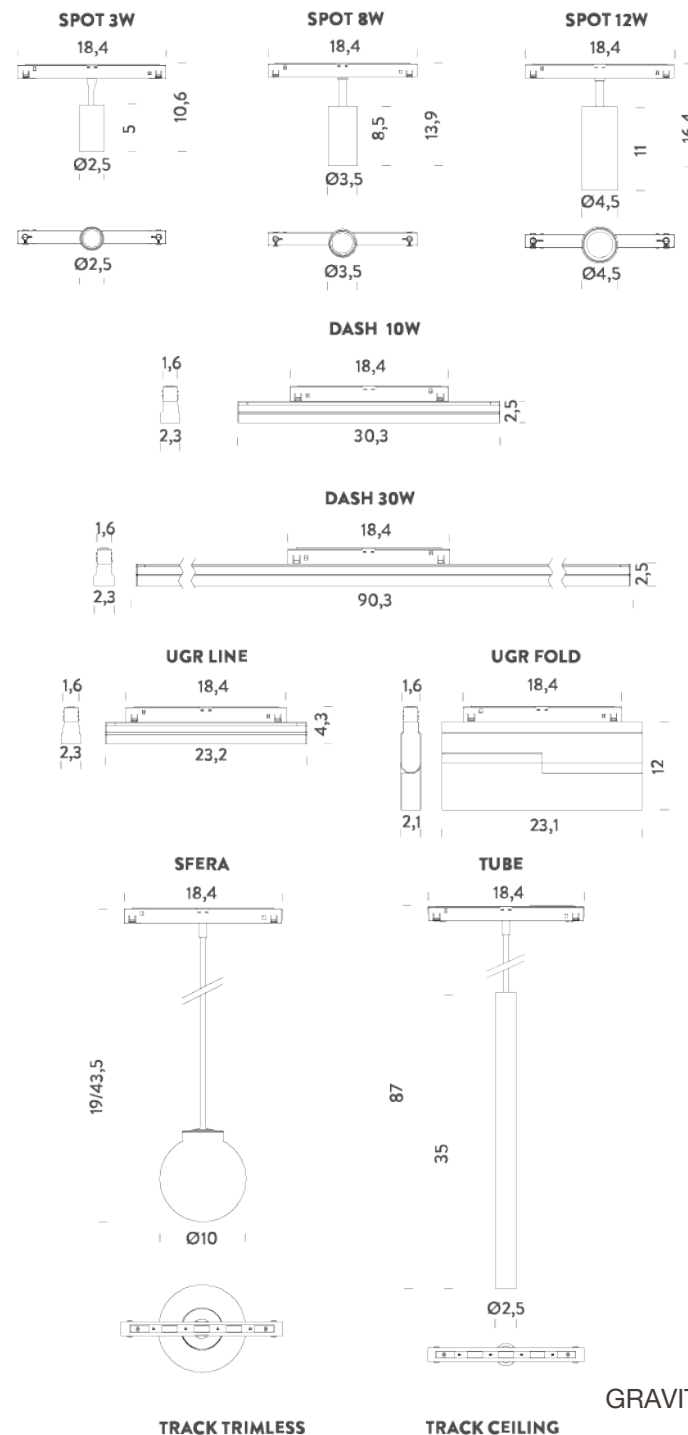

SPOT 12W | 3000K - 15°

LAMPING

Source	LED
Total power	12W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	965lm
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø4,5x18,4x16,4cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,23 kg

Codes

MFLE5201345WAN

Structure


black

PACKAGE

Package 01

Dimension: 25,5x19,5x7,5 cm / Gross weight: 0,41 kg

Certificazioni

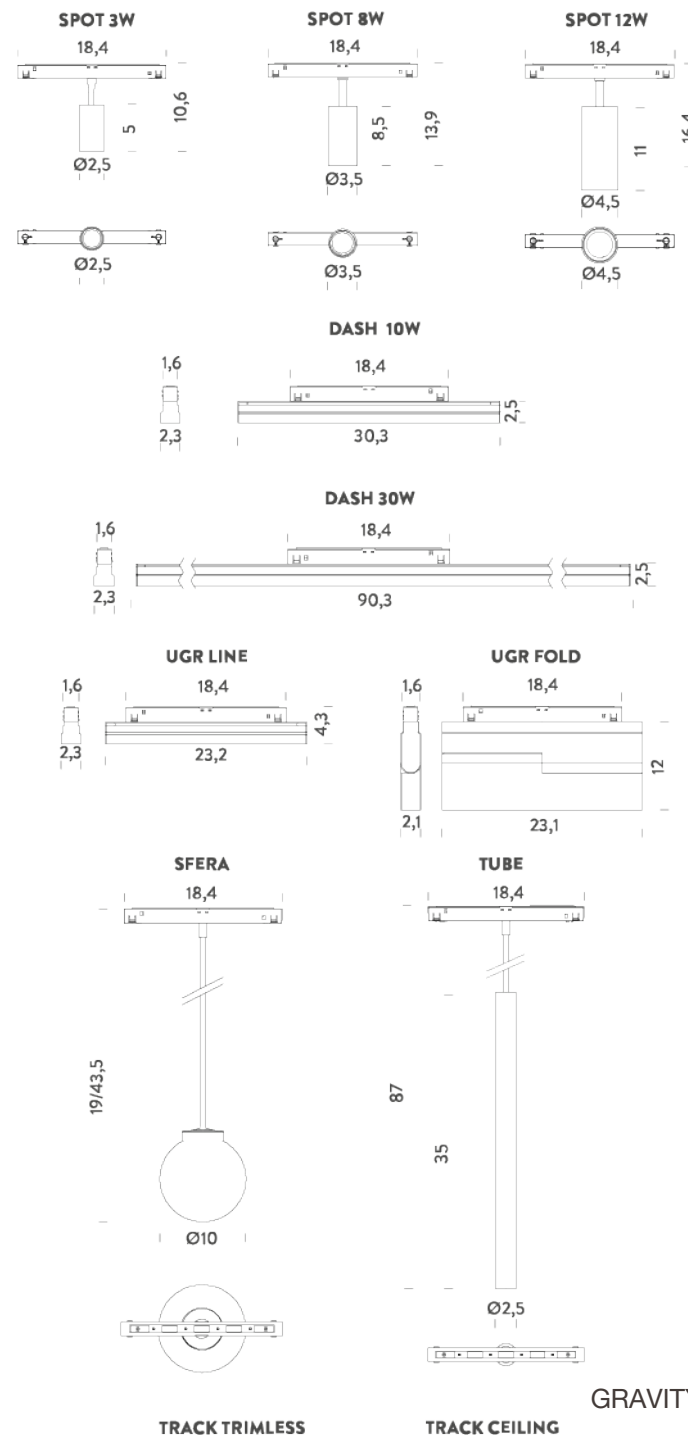

SPOT 12W | 3000K - 38°

LAMPING

Source	LED
Total power	12W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	930lm
Initial luminaire efficacy	78lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø4,5x18,4x16,4cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,23 kg

Codes

MFLE5201745WAN

Structure


black

PACKAGE

Package 01

Dimension: 25,5x19,5x7,5 cm / Gross weight: 0,41 kg

Certificazioni

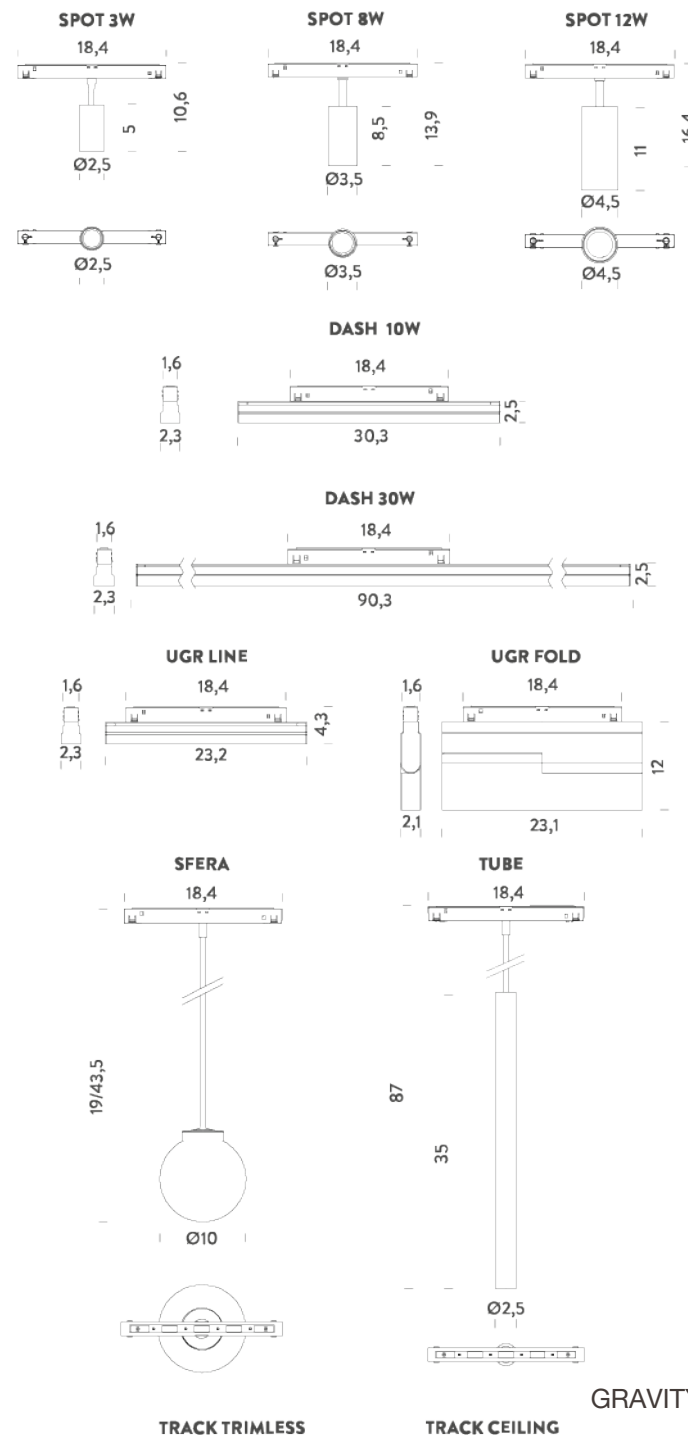

UGR LINE | 2700K

LAMPING

Source	12x LED
Total power	15W
Emission	direct UGR<19
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	1135lm
Initial luminaire efficacy	76lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	23,2x4,3x18,4cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,15 kg

Codes

MFLE5302U48DAN

Structure


black

PACKAGE

Package 01

Dimension: 25x6,5x4,5 cm / Gross weight: 0,2 kg

Certificazioni

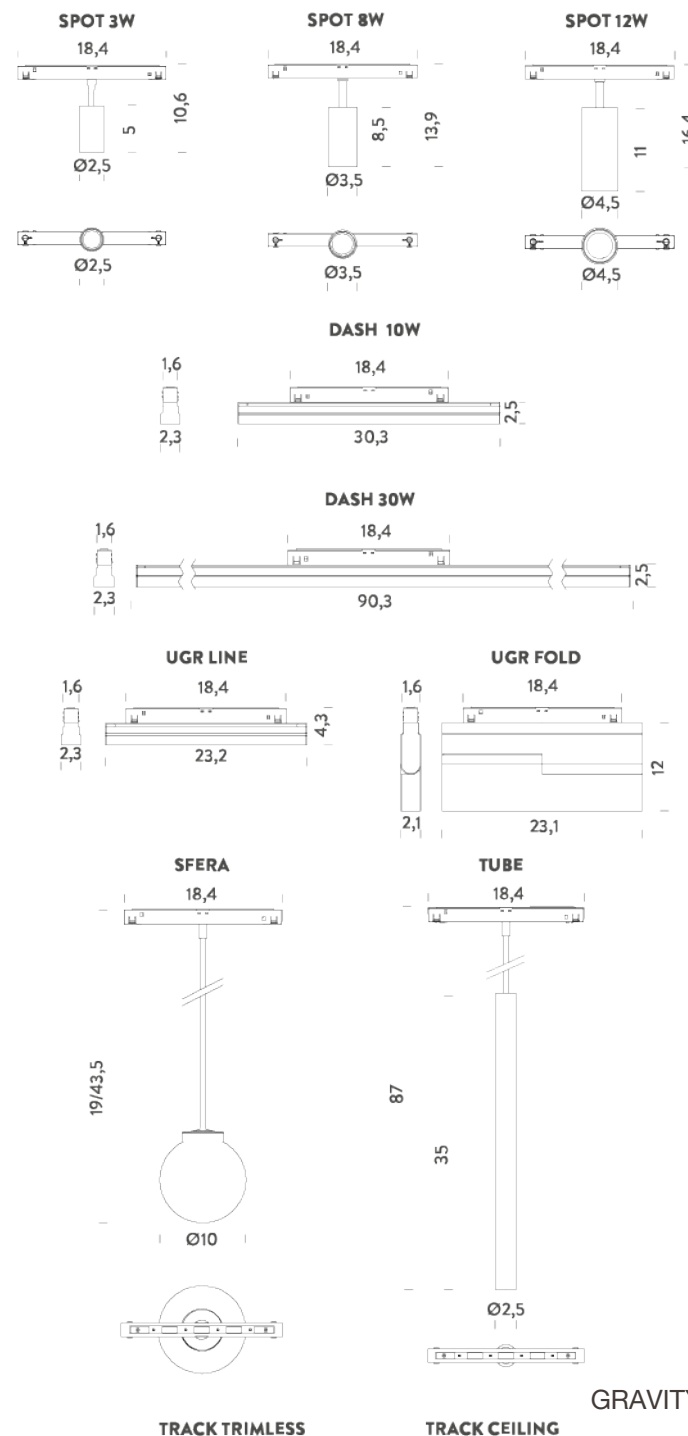

UGR LINE | 3000K

LAMPING

Source	12x LED
Total power	15W
Emission	direct UGR<19
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	1320lm
Initial luminaire efficacy	88lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	23,2x4,3x18,4cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,15 kg

Codes

MFLE5302U48WAN

Structure


black

PACKAGE

Package 01

Dimension: 25x6,5x4,5 cm / Gross weight: 0,2 kg

Certificazioni

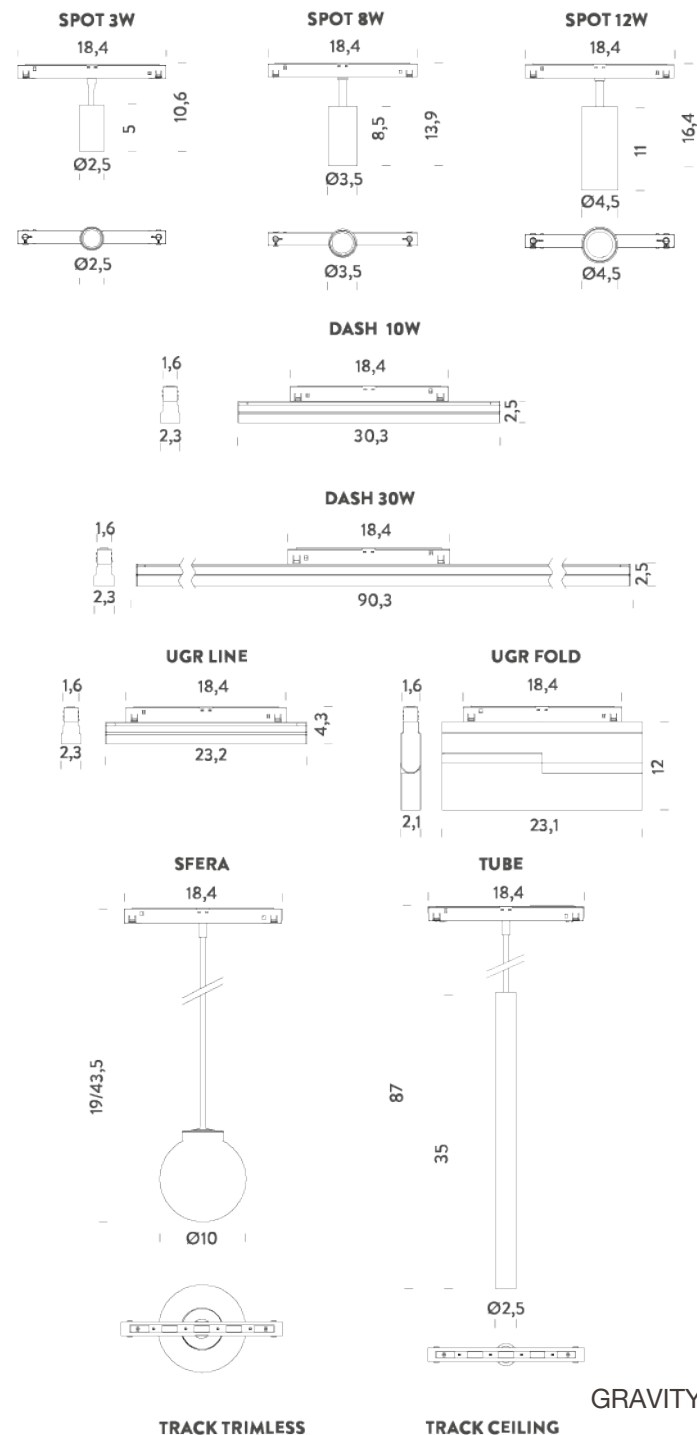

UGR FOLD | 2700K

LAMPING

Source	12x LED
Total power	20W
Emission	orientable UGR<19
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	1560lm
Initial luminaire efficacy	104lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	23,1x12x18,4cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Customization options	asymmetric optic
Net lamp weight	0,5 kg

Codes

MFLE5202T48DAN

Structure


black

PACKAGE

Package 01

Dimension: 29x15x4,5 cm / Gross weight: 0,65 kg

Certificazioni

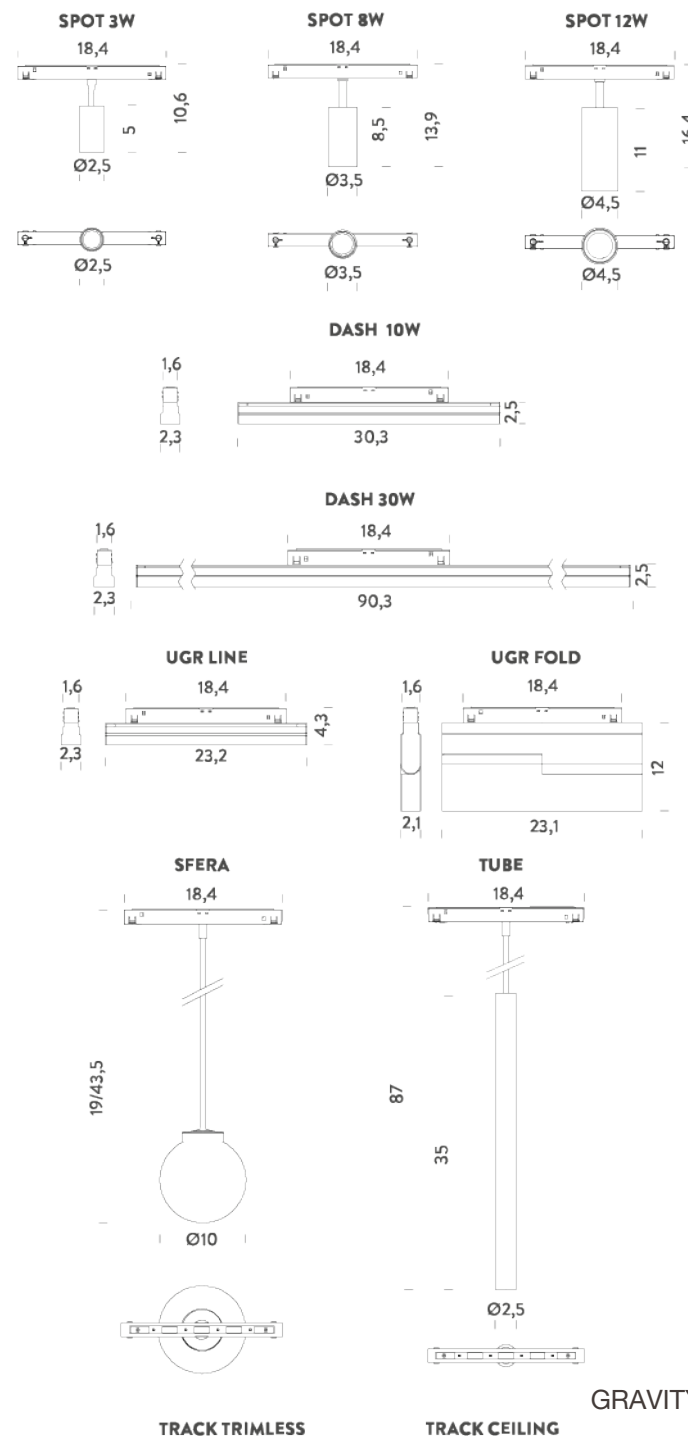

UGR FOLD | 3000K

LAMPING

Source	12x LED
Total power	20W
Emission	orientable UGR<19
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	1610lm
Initial luminaire efficacy	107lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	23,1x12x18,4cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Customization options	asymmetric optic
Net lamp weight	0,5 kg

Codes

MFLE5202T48WAN

Structure


black

PACKAGE

Package 01

Dimension: 29x15x4,5 cm / Gross weight: 0,65 kg

Certificazioni

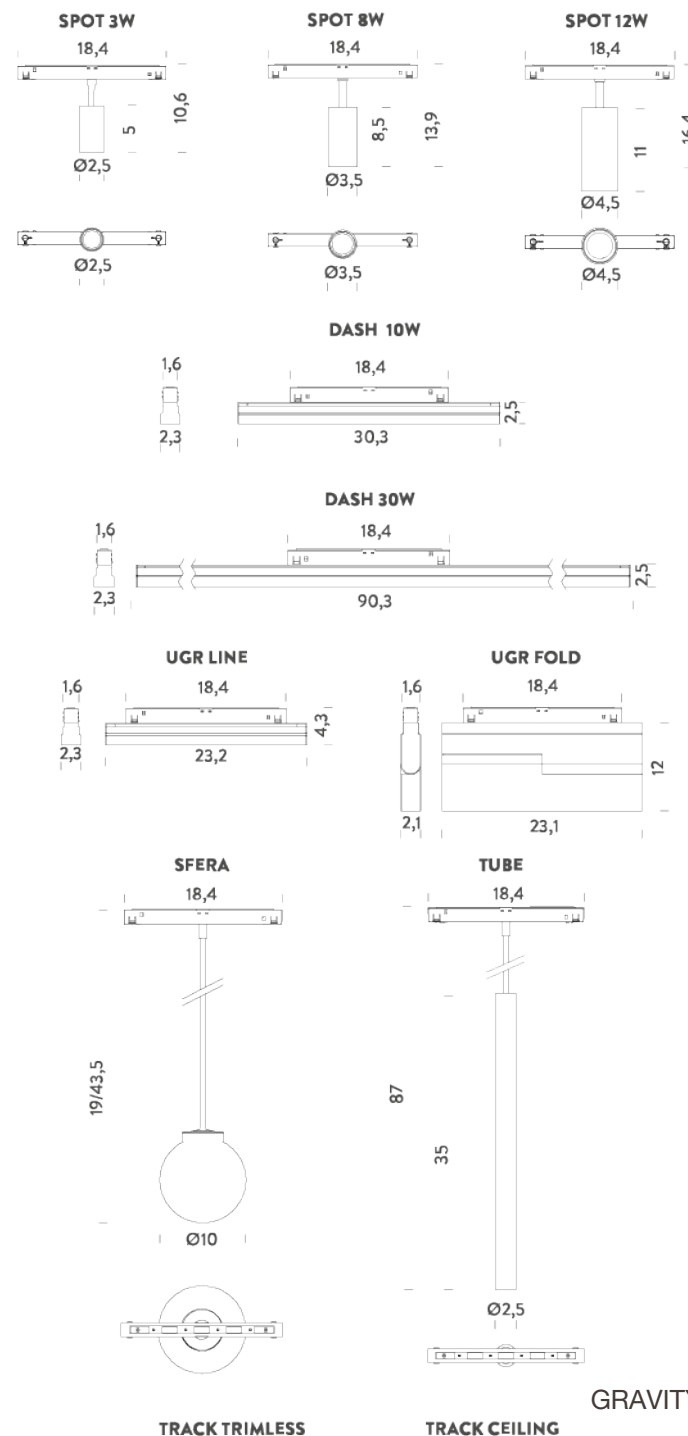

DASH 10W | 2700K

LAMPING

Source	LED strip
Total power	10W
Emission	112°
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	510lm
Initial luminaire efficacy	51lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	30,3x2,3x2,5cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,16 kg

Codes

MFLE5303G47DAN

Structure


black

PACKAGE

Package 01

Dimension: 32x6,5x4,5 cm / Gross weight: 0,2 kg

Certificazioni

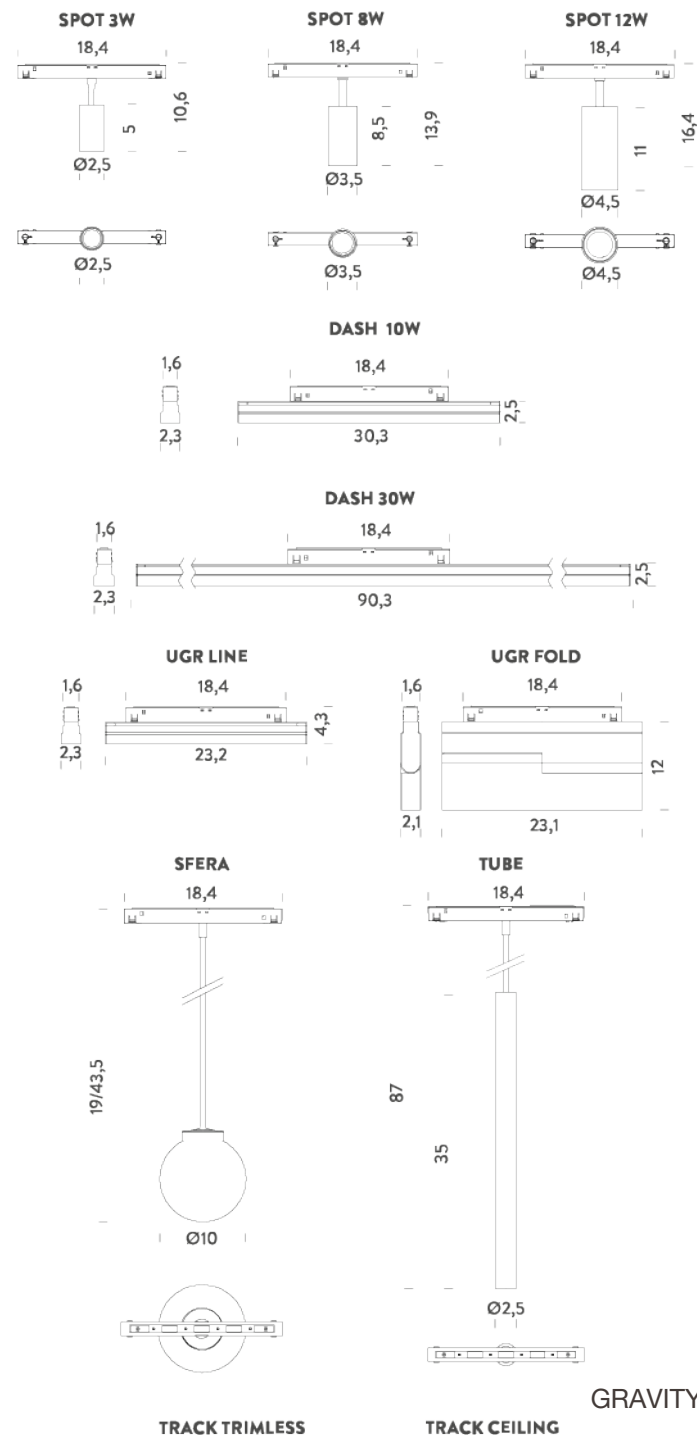

DASH 10W | 3000K

LAMPING

Source	LED strip
Total power	10W
Emission	112°
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	515lm
Initial luminaire efficacy	52lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	30,3x2,3x2,5cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,16 kg

Codes

MFLE5303G47WAN

Structure


black

PACKAGE

Package 01

Dimension: 32x6,5x4,5 cm / Gross weight: 0,2 kg

Certificazioni

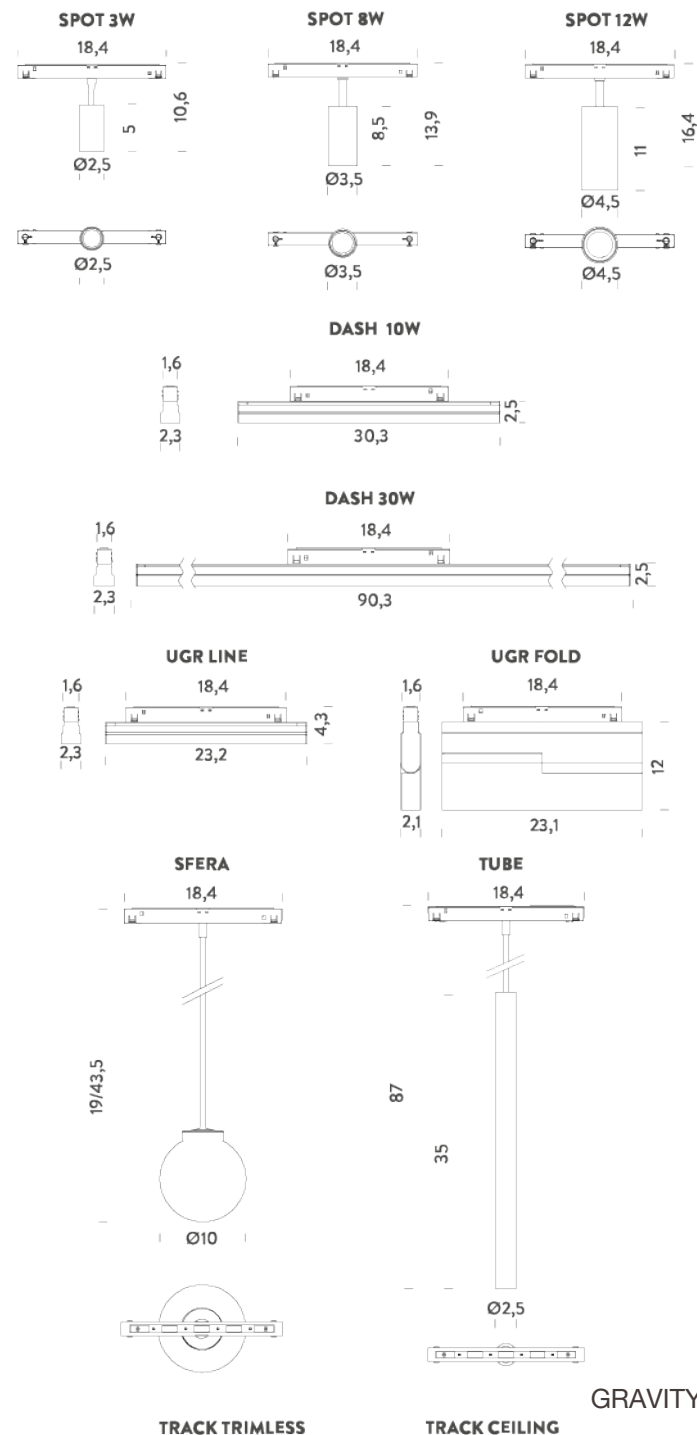

DASH 30W | 2700K

LAMPING

Source	LED strip
Total power	30W
Emission	112°
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	1435lm
Initial luminaire efficacy	48lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	90,3x2,3x2,5cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,36 kg

Codes

MFLE5309G47DAN

Structure


black

PACKAGE

Package 01

Dimension: 92x6,5x4,5 cm / Gross weight: 0,5 kg

Certificazioni

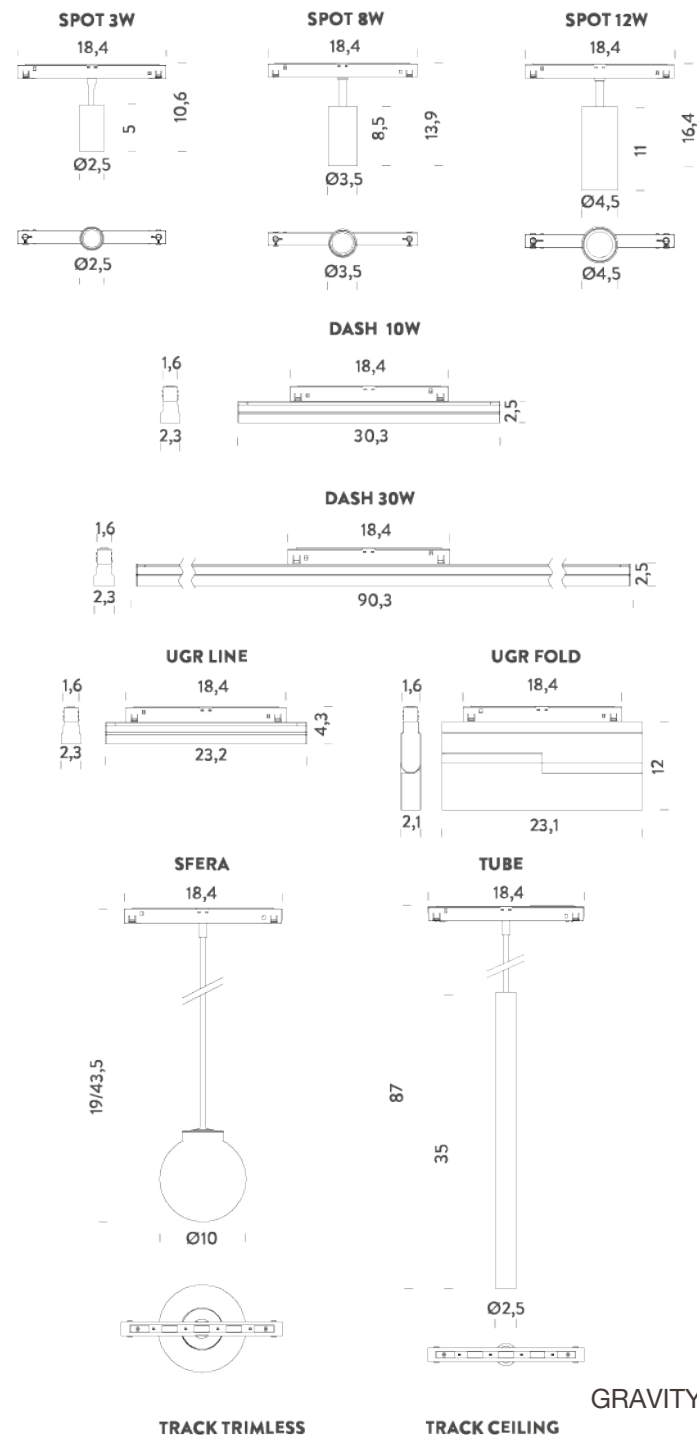

DASH 30W | 3000K

LAMPING

Source	LED strip
Total power	30W
Emission	112°
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	1510lm
Initial luminaire efficacy	50lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	90,3x2,3x2,5cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,36 kg

Codes

MFLE5309G47WAN

Structure


black

PACKAGE

Package 01

Dimension: 92x6,5x4,5 cm / Gross weight: 0,5 kg

Certificazioni

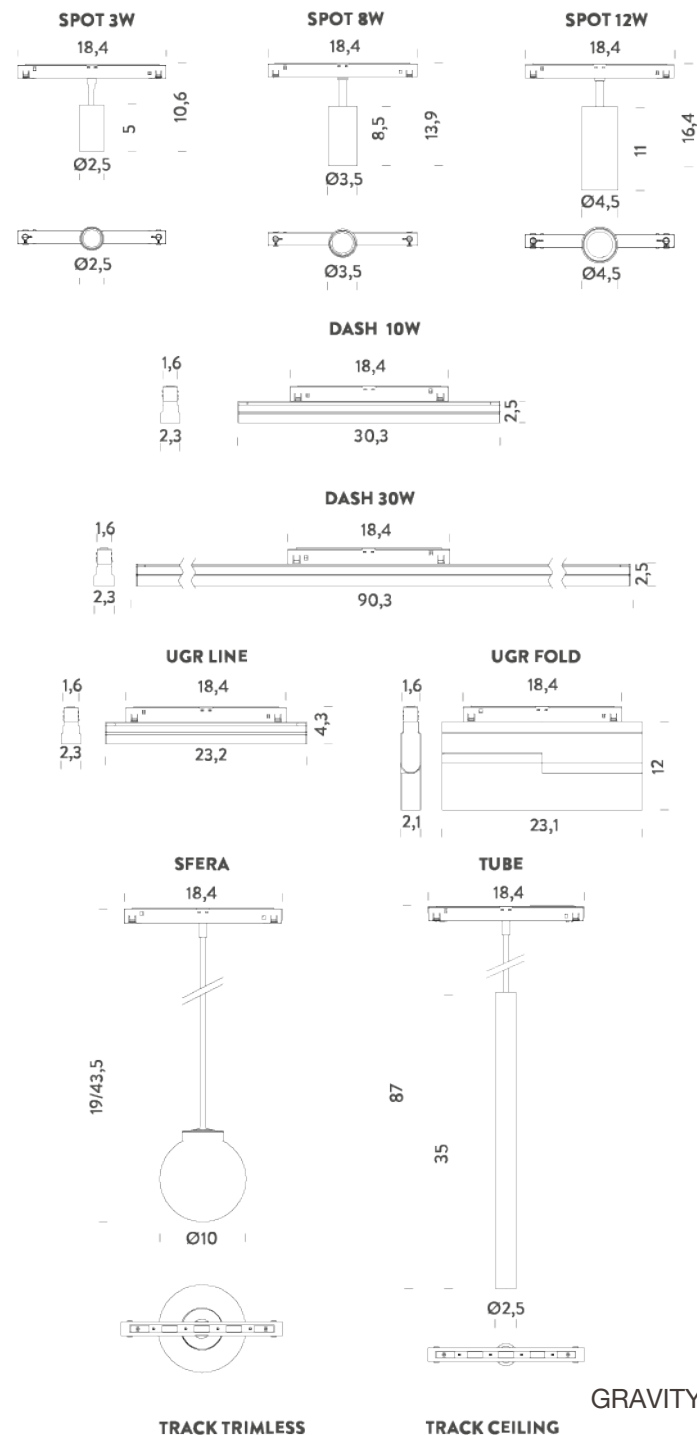

TUBE 10W | 2700K

LAMPING

Source	LED
Total power	10W
Emission	30°
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	468lm
Initial luminaire efficacy	47lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø2,5x18,4x87cm
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,30 kg

Codes

MGRA5601453DAN

Structure


black

PACKAGE

Package 01

Dimension: 39,5x10x7,5 cm

Certificazioni

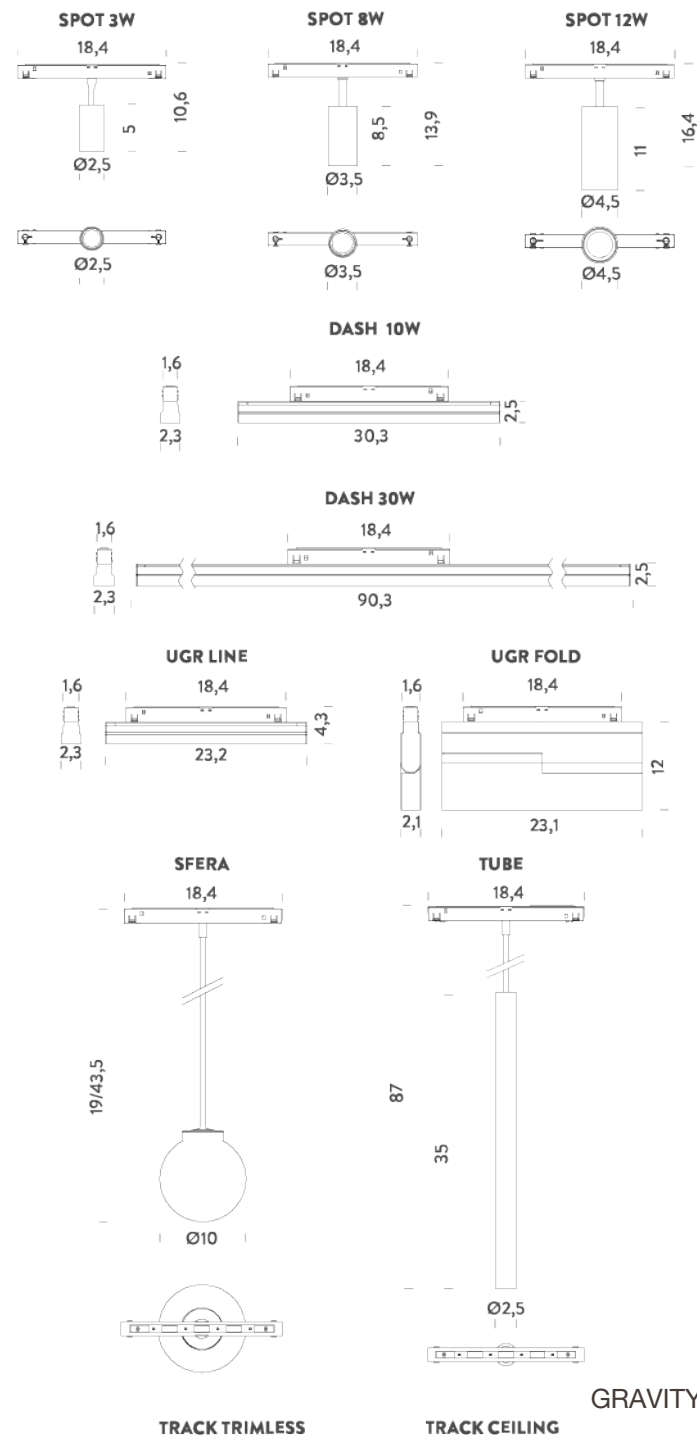

TUBE 10W | 3000K

LAMPING

Source	LED
Total power	10W
Emission	30°
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	520lm
Initial luminaire efficacy	52lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø2,5x18,4x87cm
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,30 kg

Codes

MGRA5601453WAN

Structure


black

PACKAGE

Package 01

Dimension: 39,5x10x7,5 cm

Certificazioni

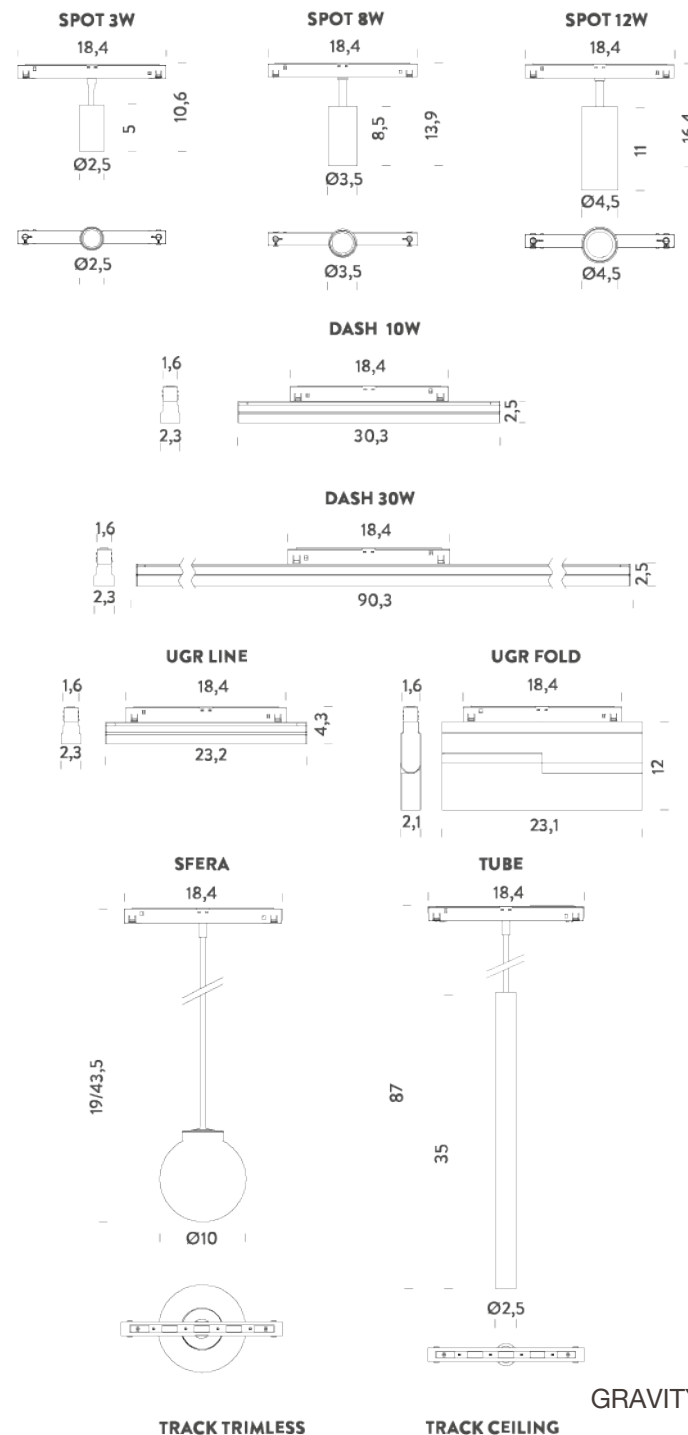

SPHERE 19CM | 2700K

LAMPING

Source	LED
Total power	5W
Emission	diffused
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	348lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø10x18,4x19cm
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,17 kg

Codes

MGRA5621G21DAN

Structure


white glass

PACKAGE

Package 01

Dimension: 29x20x12,5 cm / Gross weight: 0,35 kg

Certificazioni

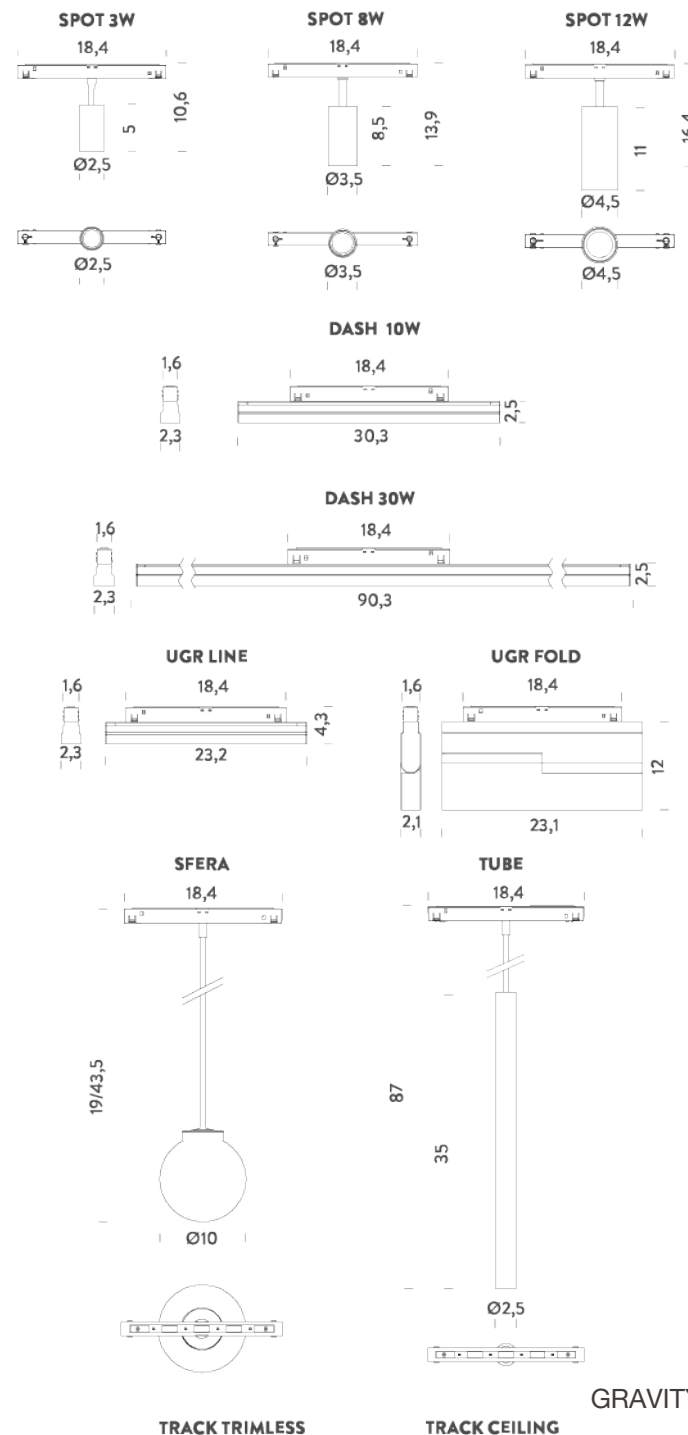

SPHERE 19CM | 3000K

LAMPING

Source	LED
Total power	5W
Emission	diffused
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	427lm
Initial luminaire efficacy	85lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø10x18,4x19cm
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,17 kg

Codes

MGRA5621G21WAN

Structure


white glass

PACKAGE

Package 01

Dimension: 29x20x12,5 cm / Gross weight: 0,35 kg

Certificazioni

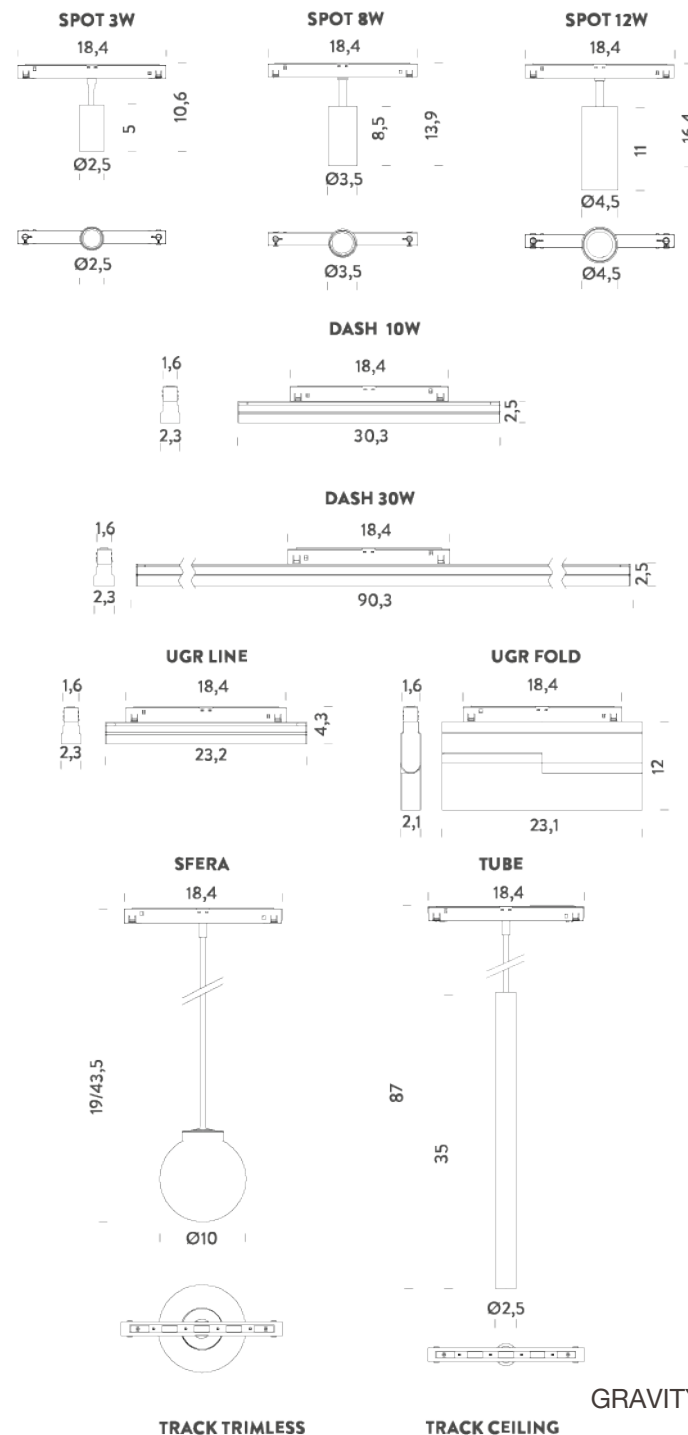

SPHERE 43,5CM | 2700K

LAMPING

Source	LED
Total power	5W
Emission	diffused
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	348lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø10x18,4x43,5cm
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,2 kg

Codes

MGRA5641G21DAN

Structure


white glass

PACKAGE

Package 01

Dimension: 49,5x29,5x15 cm / Gross weight: 0,4 kg

Certificazioni

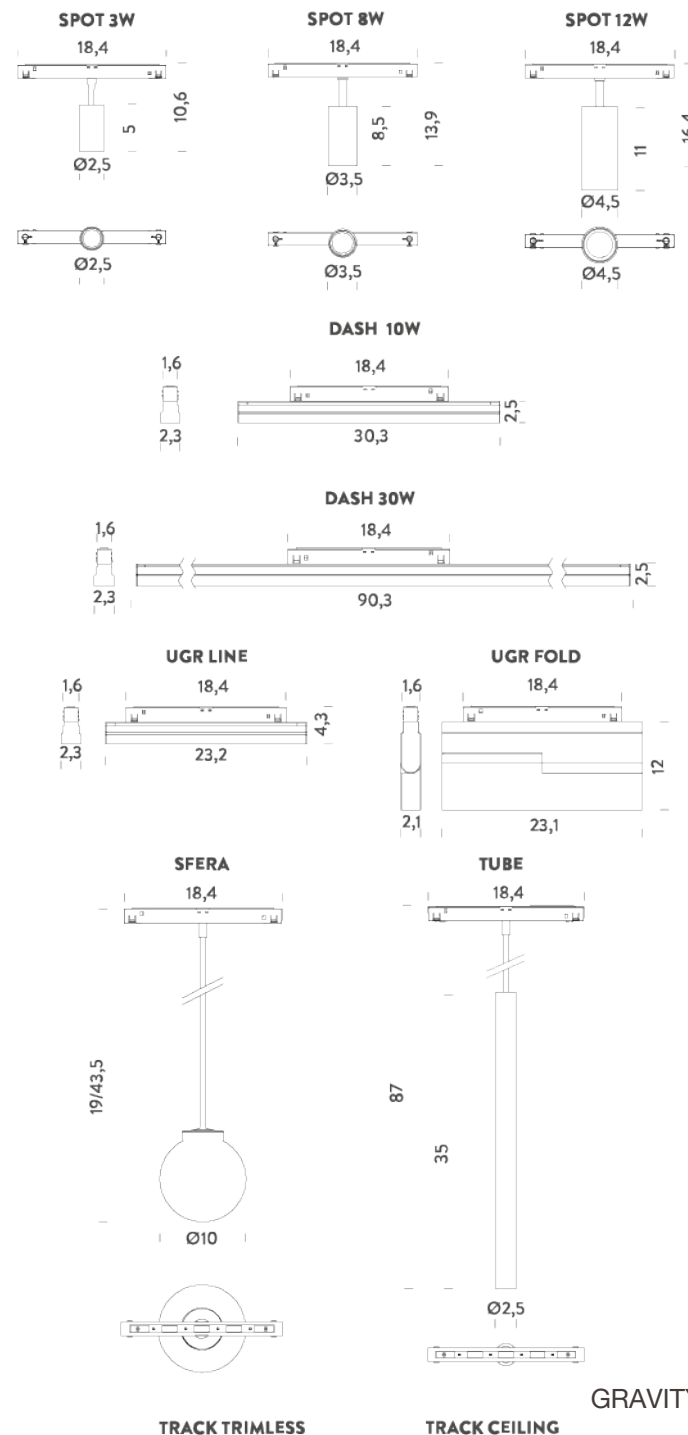

SPHERE 43,5CM | 3000K

LAMPING

Source	LED
Total power	5W
Emission	diffused
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	427lm
Initial luminaire efficacy	85lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø10x18,4x43,5cm
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,2 kg

Codes

MGRA5641G21WAN

Structure


white glass

PACKAGE

Package 01

Dimension: 49,5x29,5x15 cm / Gross weight: 0,4 kg

Certificazioni

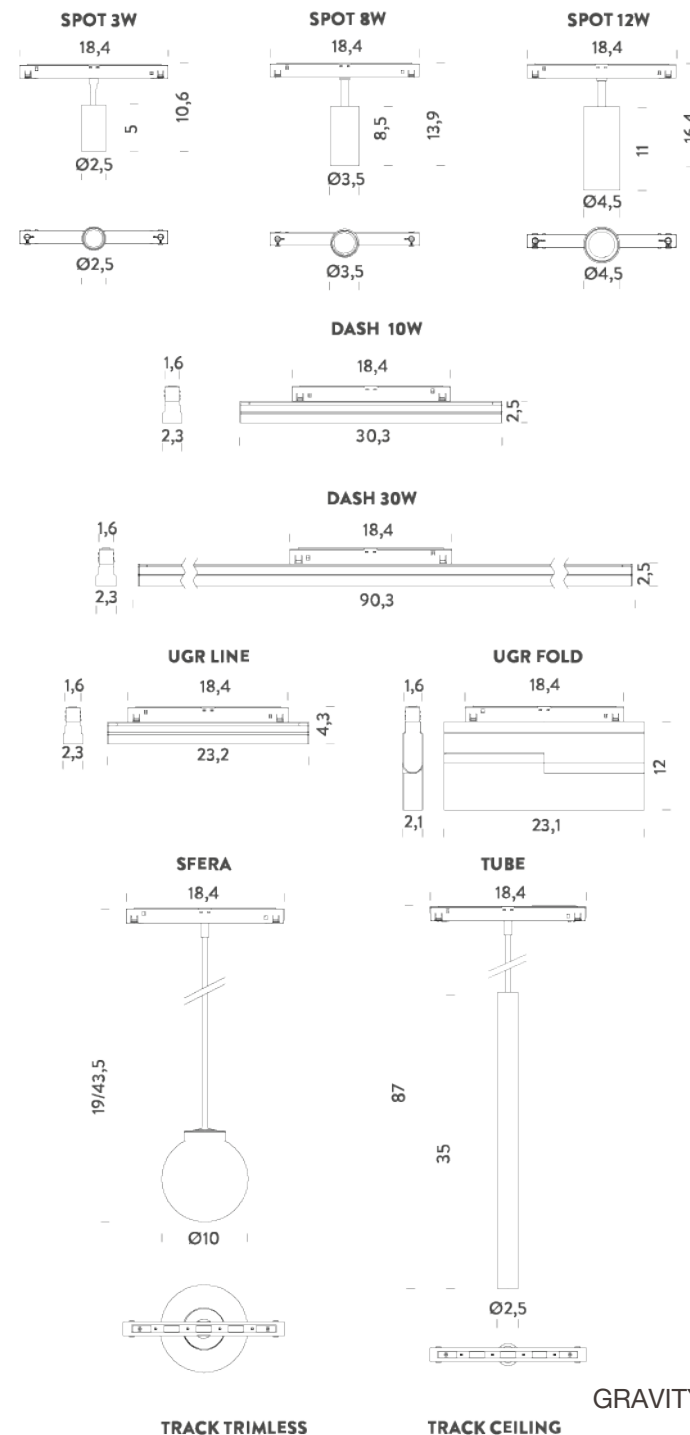

TRACK CEILING | 1M

LAMPING

Tension
Dimensions
Materials
Notes
Customization options
Accessories

48V
100x2,6x5,4cm
aluminium
pendant version available
recessed trim version
Ceiling-Pendant Track 48V - accessories, | Ceiling-Trimless Track 48V - accessories,
0,97 kg

Codes

MFLE0210NE

Structure

black


PACKAGE

Package 01

Dimension: 107x7,5x7,5 cm / Gross weight: 1,28 kg

Certificazioni

UK
CA

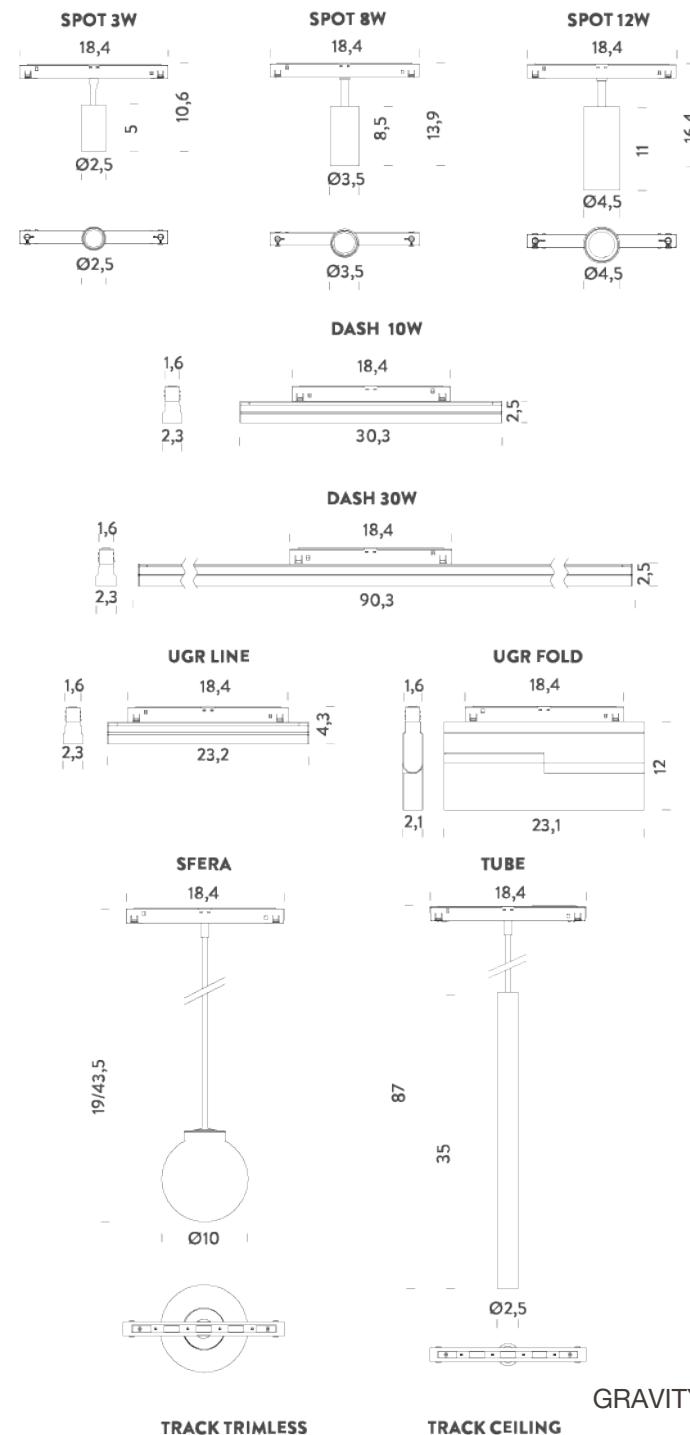

TRACK CEILING | 2M

LAMPING

Tension
Dimensions
Materials
Notes
Customization options
Accessories

48V
200x2,6x5,4cm
aluminium
pendant version available
recessed trim version
Ceiling-Pendant Track 48V - accessories, | Ceiling-Trimless Track 48V - accessories,
1,93 kg

Codes

MFLE0220NE

Structure

black


PACKAGE

Package 01

Dimension: 207x7,5x7,5 cm / Gross weight: 2,59 kg

Certificazioni

UK
CA

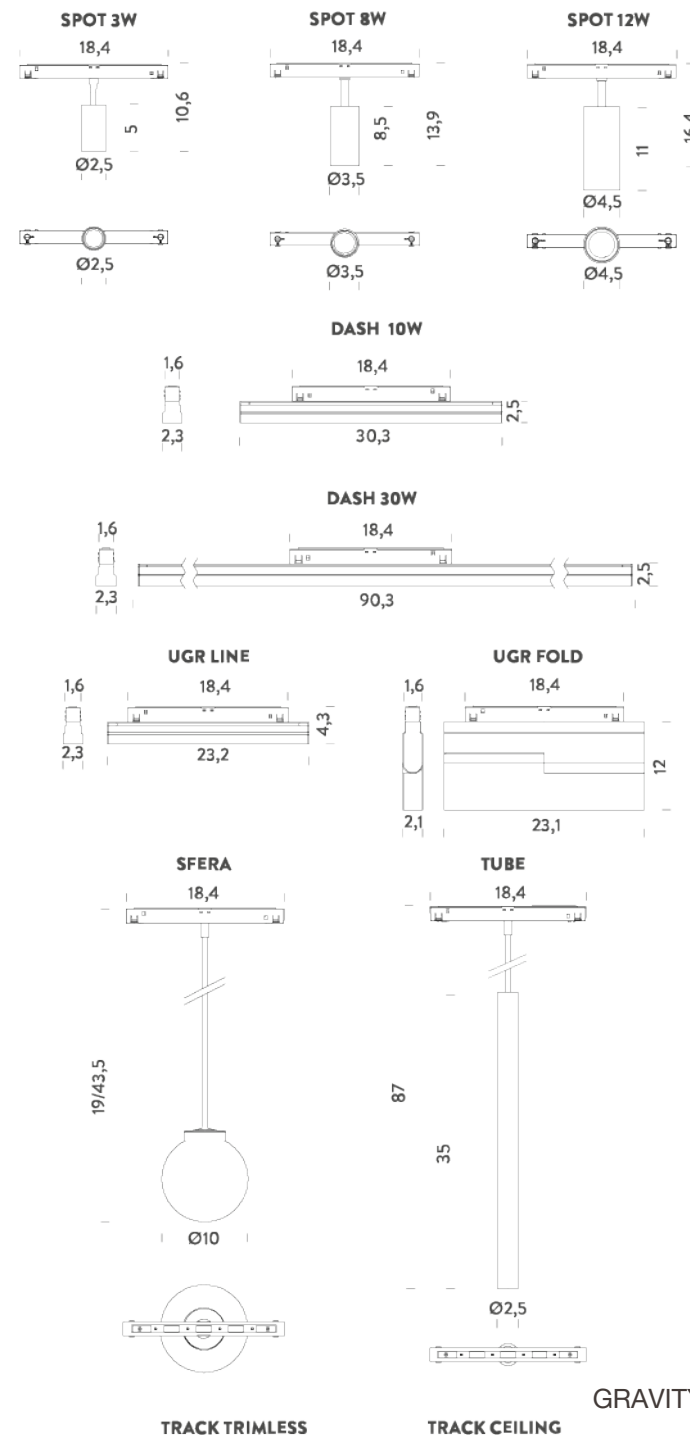

TRACK CEILING | 3M

LAMPING

Tension	48V
Dimensions	300x2,6x5x4cm
Materials	aluminium
Notes	pendant version available
Customization options	recessed trim version
Accessories	Ceiling-Pendant Track 48V - accessories, Ceiling-Trimless Track 48V - accessories,
Net lamp weight	2,9 kg

Codes

MFLE0230NE

Structure


black

PACKAGE

Package 01

Dimension: 307x7,5x7,5 cm / Gross weight: 3,87 kg

Certificazioni

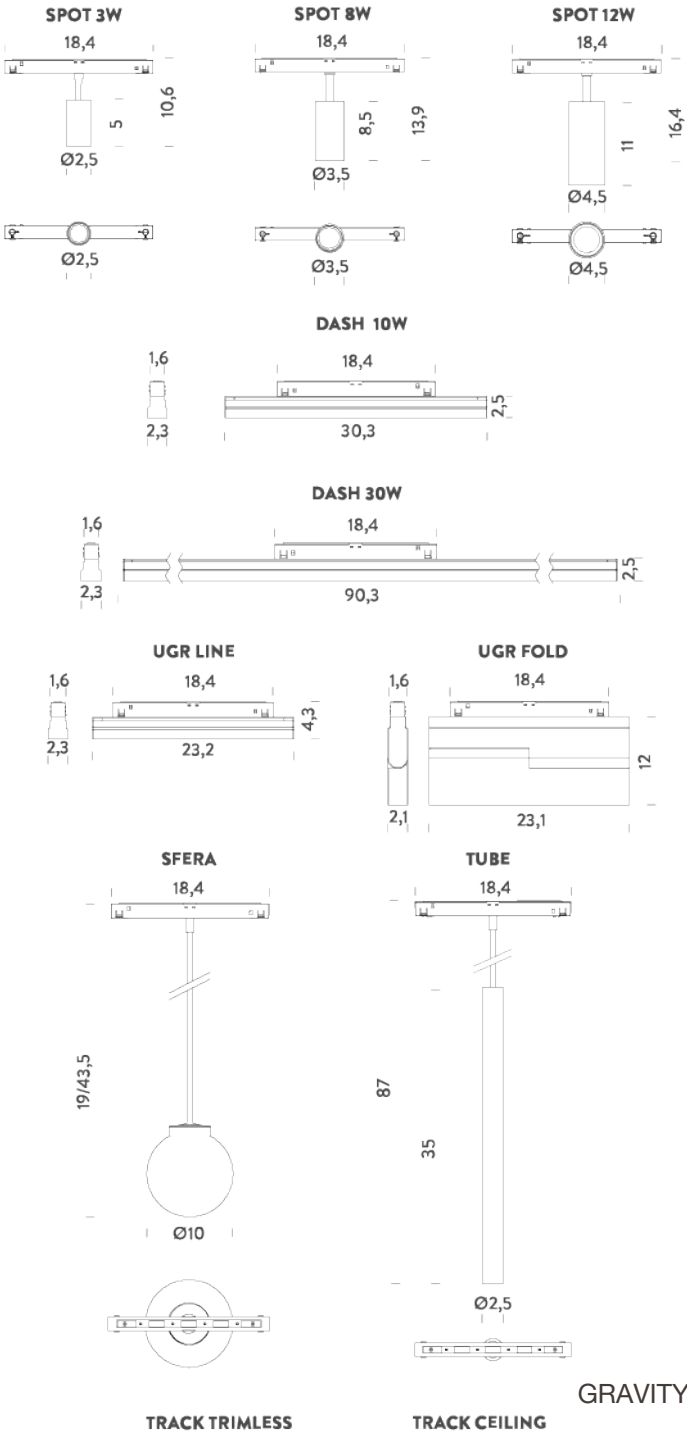

TRACK TRIMLESS | 1M

LAMPING

Tension	48V
Dimensions	100x7,4x5,4cm
Materials	aluminium
Customization options	recessed trim version
Accessories	Ceiling-Trimless Track 48V - accessories, Trimless Track 48V - accessories,
Net lamp weight	1,3 kg

Codes

MFLE0810NE

Structure


black

PACKAGE

Package 01

Dimension: 107x9,5x9,5 cm / Gross weight: 1,68 kg

Certificazioni

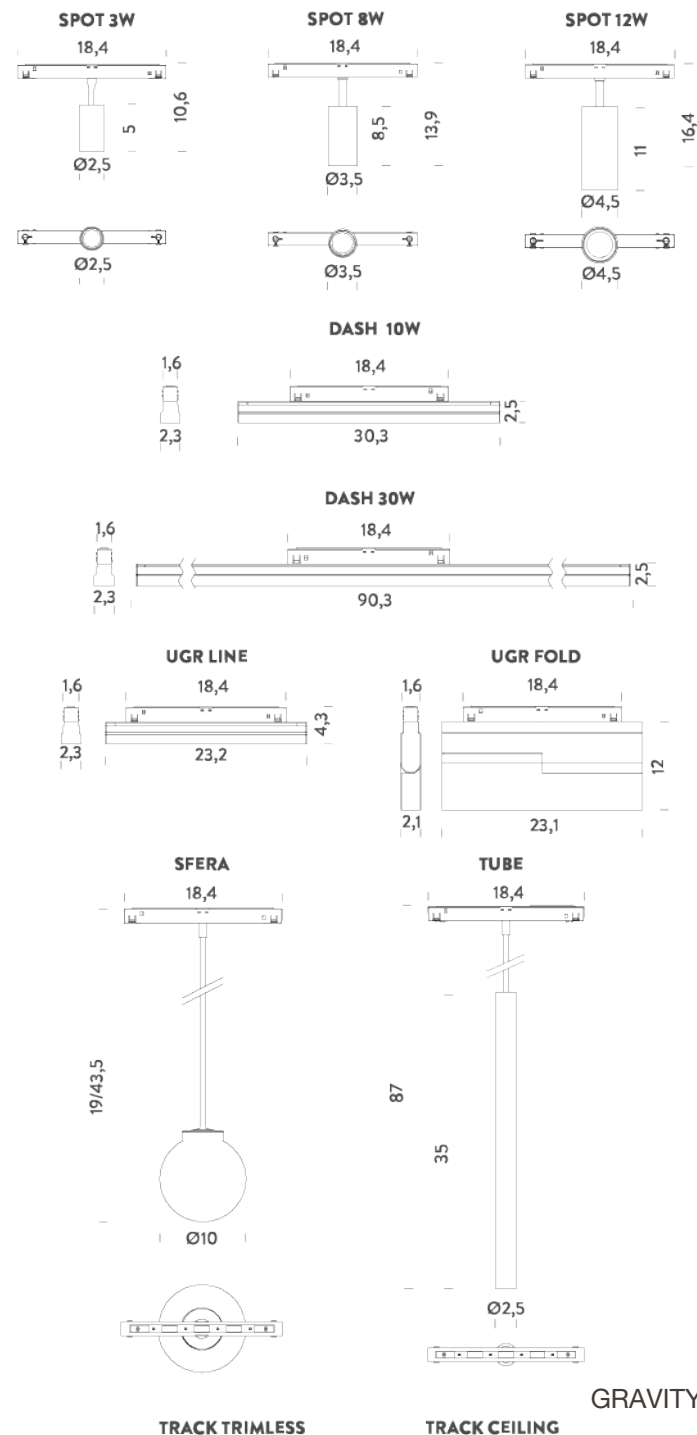

TRACK TRIMLESS | 2M

LAMPING

Tension	48V
Dimensions	200x7,4x5,4cm
Materials	aluminium
Customization options	recessed trim version
Accessories	Ceiling-Trimless Track 48V - accessories, Trimless Track 48V - accessories,
Net lamp weight	3 kg

Codes

MFLE0820NE

Structure


black

PACKAGE

Package 01

Dimension: 207x9,5x9,5 cm / Gross weight: 3,65 kg

Certificazioni

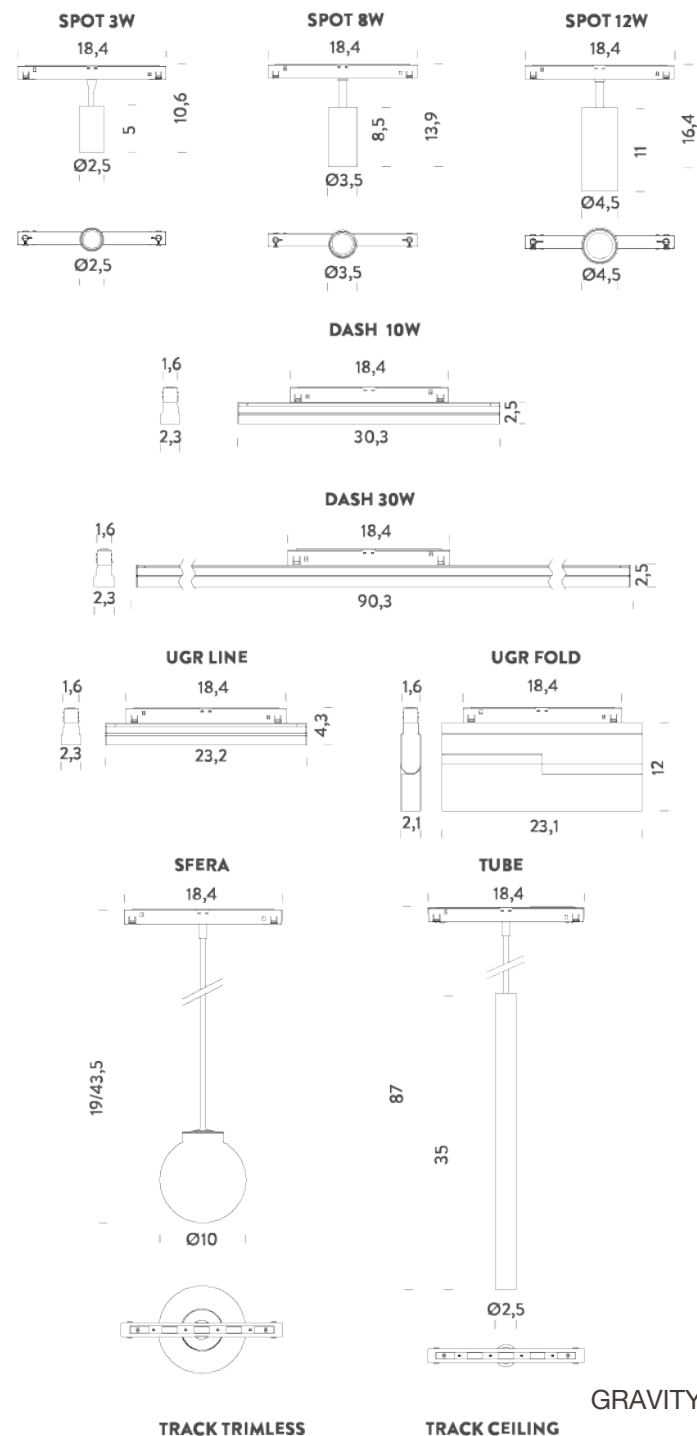

TRACK TRIMLESS | 3M

LAMPING

Tension	48V
Dimensions	300x7,4x5,4cm
Materials	aluminium
Customization options	recessed trim version
Accessories	Ceiling-Trimless Track 48V - accessories, Trimless Track 48V - accessories,
Net lamp weight	4,02 kg

Codes

MFLE0830NE

Structure

black

PACKAGE

Package 01

Dimension: 307x9,5x9,5 cm / Gross weight: 5,33 kg

Certificazioni

