

MINIFLUX LINEA WALL-C TRANSPARENT

Miniflux Linea Wall-C è un sistema a LED a con fissaggio a parete destinato all'illuminazione in interni. Corpo in profilato in alluminio su cui è posizionata una striscia di Nastro LED 24V DC. CRI>97. Diffusore in policarbonato trasparente. É proposto con finitura black. Miniflux è disponibile in due temperature colore.



2700K

LAMPING

Source	LED strip
Total power	15W
Emission	indirect
Switching	according to driver
Tension	24V
Color temperature	2700K
Luminous flux	852lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver not included 2 x clip included
Customization options	tube length direct light direction external electrical cable
Net lamp weight	0,4 kg

Codes

BMLC4210026DAN
BMLC4210026DBO
BMLC4210026DAO

Structure

black
white
gold

PACKAGE


Package 01

Dimension: 120x8x4 cm / Gross weight: 0,4 kg

Certificazioni



MINIFLUX LINEA WALL - C transparent

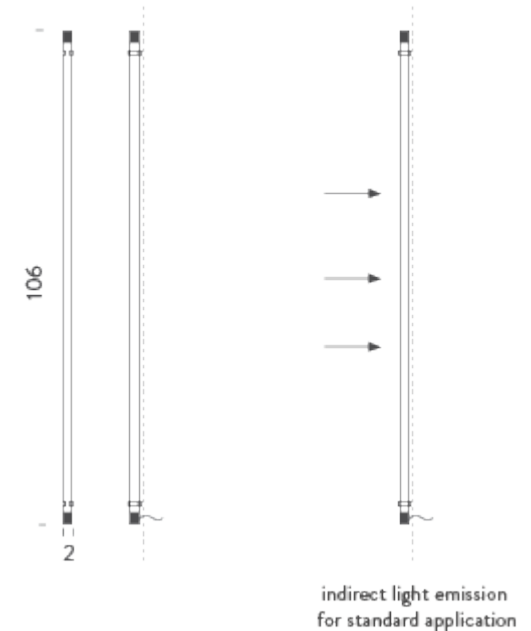

3000K

LAMPING

Source	LED strip
Total power	15W
Emission	indirect
Switching	according to driver
Tension	24V
Color temperature	3000K
Luminous flux	897lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver not included 2 x clip included
Customization options	tube length direct light direction external electrical cable
Net lamp weight	0,4 kg

Codes

BMLC4210026WAN
BMLC4210026WBO
BMLC4210026WAO

Structure

black
white
gold

PACKAGE

Package 01

Dimension: 120x8x4 cm / Gross weight: 0,4 kg

Certificazioni



MINIFLUX LINEA WALL - C
transparent

